




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

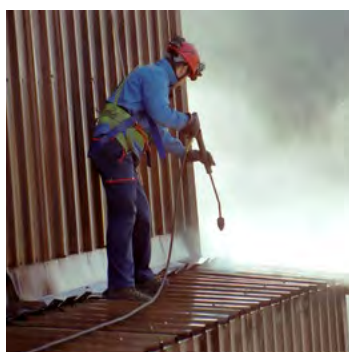

CAT 4900

Parflex Ultra High Pressure Thermoplastic
Hose, Fittings and Accessories



ENGINEERING YOUR SUCCESS.

Extra care is taken in the preparation of this literature but Parker is not responsible for any inadvertent typographical errors or omissions. Information subject to change without notice. The information in this catalog is only accurate as of the date of publication. For a more current information base, please consult the Parflex® Division web site at www.parker.com/pfd.



FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.


This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

Welcome to The Parflex® Division



Manitowoc, WI • Ravenna, OH
Fort Worth, TX • Randleman, NC
Stafford, TX • Monterrey, MX

Our Charter

To be the global leader in engineered polymer-based products while providing system solutions for the conveyance and control of fluids.

As part of the Parker Fluid Connectors Group, the Parflex® Division is responsible for the design and manufacture of hoses and tubing to handle extreme applications. Products include thermoplastic and fluoropolymer hose and tubing, hose bundles, instrumentation tubing, harnesses and accessories.

The Parflex® Division includes the Ravenna division headquarters in Ohio, and manufacturing facilities in:

- Manitowoc, WI
- Fort Worth, TX
- Stafford, TX
- Randleman, NC
- Monterrey, Mexico

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



How to Use This Catalog

Table of Contents

For quick, easy listing of topics covered by section, reference the Table of Contents on pg. 2.

Information by Part Number

See the Part Number Index beginning on page F-49.

Information by Pressure

Reference the Pressure Selection Chart found at the beginning of the hose section in the catalog.

Information by Market









Reference the market information section, pgs. 9 - 19, for a visual index of hoses by market application.

The Parker Part Numbering System

The part numbering system for hose and fittings is explained in the introduction on pages 5-9.

International Symbols

An explanation of the symbols and their meaning used in the product tables can be found below.

Symbol	Meaning	Symbol	Meaning	Symbol	Meaning
#	Part Number		Working Pressure		Hex Size
	Hose Inner Diameter (I.D.)		Minimum Bend Radius		Diameter
	Hose Outer Diameter (O.D.)		Thread Size		Weight

ICON Identification Key

Hose markets/applications are identified using the following icons:



Oilfield Service



Waterblast



Hydraulic

Table of Contents

A Hose

Why Thermoplastic? _____	A-2	Hose Selection Charts _____	A-5 : A-10
polyflex Hose Safety _____	A-3	Hoses by Series _____	A-9 : A-68
How to Read the Hose Section _____	A-4		

B Fittings

Hose Fitting Nomenclature _____	B-2	Hose Fittings by Series _____	B-7 : B-62
Hose Fitting Configuration Chart _____	B-3 : B-5	PolyflexLok _____	B-63 : B-64
How to Read the Fitting Section _____	B-6		

C Adapters and Valves

Part Number Nomenclature _____	C-3 : C5	NPT _____	C-26 : C-41
Type M _____	C-6 : C-9	JIC _____	C-42 : C-45
20,000 PSI - Medium Pressure _____	C-10 : C-19	Valves — Medium Pressure _____	C-46 : C-48
30,000/60,000 PSI High Pressure _____	C-20 : C-25	Valves — High Pressure _____	C-49 : C-50

D Quick Couplings

Quick Coupling Part Number Nomenclature _____	D-2 : D-3
Rogan Series—30,000 PSI Maximum Working Pressure _____	D-4 : D-10
C Series Hydraulic Couplers—29,800 PSI Maximum Working Pressure _____	D-11 : D-17

E Accessories

Heavy Duty Abrasion Cover _____	E-2	Support Grips _____	E-3
Heavy Duty Abrasion Cover Sleeves _____	E-2	Dies _____	E-3
Spring Guards _____	E-2	Warning Tags _____	E-3
Bend Restrictors _____	E-2	Pressure Containment Shield _____	E-4
Containment Grips _____	E-3	Anti-Gall Lubricant _____	E-4

F General Technical

Selection, Installation and Maintenance of polyflex Hose Assemblies _____	F-2	Recommended Tightening Procedures _____	F-17
Dash Sizes _____	F-3	Metric Conversion Chart _____	F-18
Installation Tips _____	F-4	Glossary _____	F-19
Selection of Hose Diameter from Flow Rate and Velocity _____	F-5	General Chemical Resistance Table _____	F-20
Pressure Drop _____	F-6	PFDE-ES29 _____	F-24
Permeability Coefficient _____	F-16	PFDE-ES28 _____	F-29
		Twin/Multi-Line Separation Instructions _____	F-42

Safety Guide _____	F-47
Offer of Sale _____	F-51
Part Number Index _____	F-53

Selecting the Right Hose

Choosing Your Hose

Before selecting hoses from Catalog 4900, it will be easier if you familiarize yourself with the basics of high pressure thermoplastic hoses. If you review the symbols on pg. 1 and the hose and fitting part number explanations on pages 5 & 6, you will have a foundation for selecting your hose. Also, the Hose Selection Charts (located at the beginning of Section A) will help pinpoint the hose you require. You can use the catalog to identify individual hoses by:

- Brief general description
- Specific size with corresponding working pressure
- Market application
- Core tube material
- Reinforcement/type of construction
- Cover material


For fittings, refer to the visual indexes in Section B.

General Construction

Construction standards may vary between specific thermoplastic hoses.

Specific braid materials, wire reinforcements, spiral reinforcements and distinguishing features are clearly called out with each hose product. Perforated and non-perforated hoses are available based on application.

Hoses are engineered and manufactured to appropriate burst pressure to working pressure ratios according to application. Never operate a hose beyond its published working pressure.

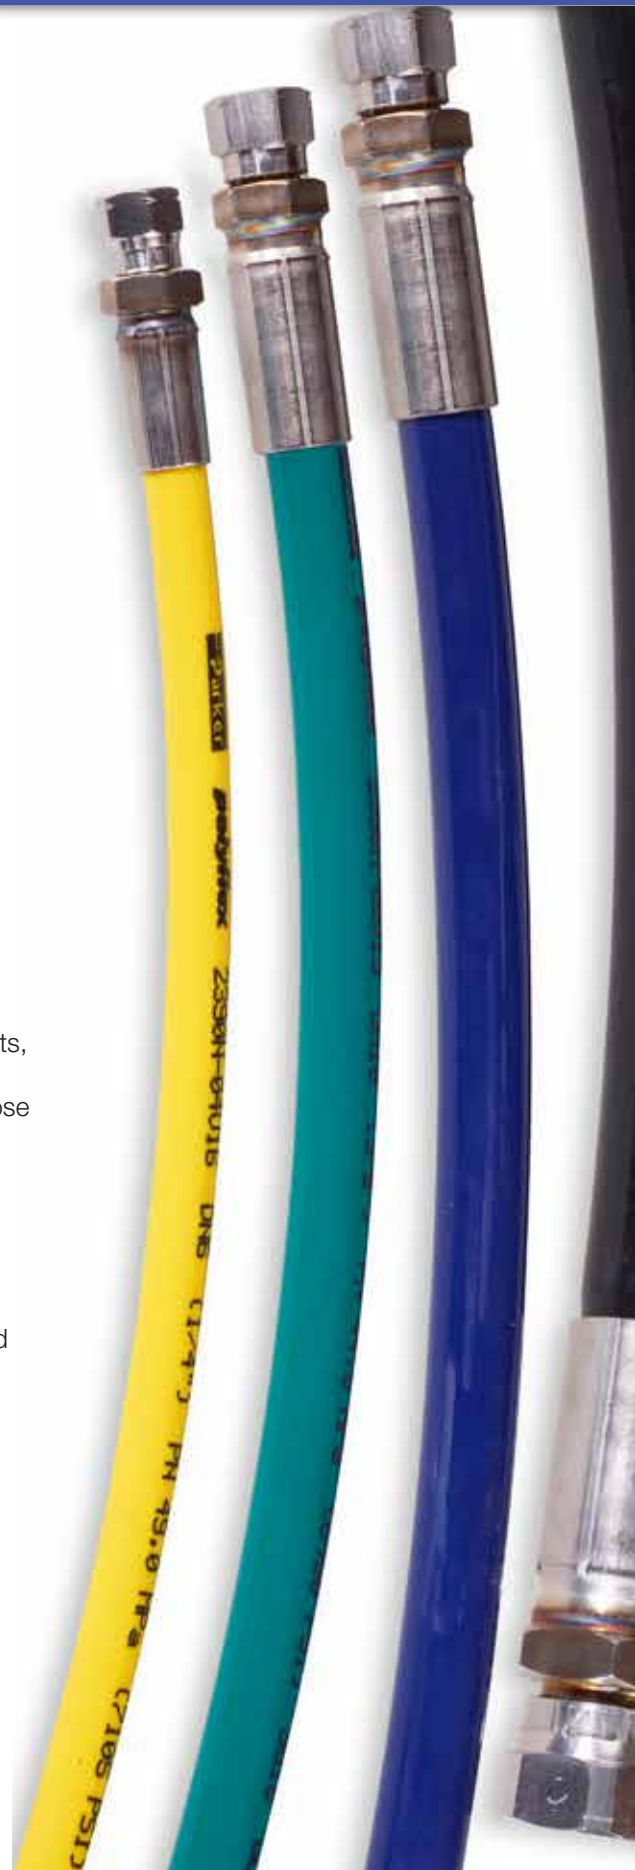



“STAMPED”

Size

The appropriate inside and outside diameters and length of the hose should be determined

Temperature

The ambient and/or maximum temperature of the material being conveyed

Application

External conditions including abrasion, climate, heat, flexing, crushing, kinking, and degrees of bending

Media

The composition of the substance being conveyed and chemical compatibility with the hose inner core and, if applicable, the outer cover

Pressure

The maximum pressure of the system, including pressure spikes

Ends

The appropriate end connection and attachment method for the application

Delivery

Testing, quality, packaging, and delivery requirements



For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



Hose & Fittings Part Numbers

Hose Part Number Build



2440N-16V30

2440

1. Reinforcement I

- 0 = No spiralizing
- 1 = Two open spiralized layers
- 2 = Two closed spiralized layers
- 3 = Two closed spiralized layers two open spiralized layers
- 4 = Four closed spiralized layers
- 5 = Four closed spiralized layers (increased pressure)
- 6 = Six closed spiralized layers
- 7 = Six closed spiralized layers (increased pressure)
- 8 = Eight closed spiralized layers
- 9 = Eight closed spiralized layers (increased pressure)

2440

2. Reinforcement II (If Reinforcement I ≠ 0)

- 1 = Synthetic fiber (not aramid)
- 2 = Aramid fiber
- 3 = Stainless steel wire
- 4 = Steel wire
- 5 = Iron wire
- 6 = Cord strand
- 7 = Steel wire and open spiralized synthetic yarn
- 8 = Steel wire and open spiralized cord strand
- 9 = Other construction

2. Reinforcement II (If Reinforcement I = 0)

- 0 = No braiding
- 1 = One braid of non-aramid fiber
- 2 = One braid of aramid fiber
- 3 = One braid of stainless steel wire
- 4 = One braid of steel wire
- 5 = One braid of iron wire
- 6 = one braid of iron wire, zinc-plated

2440

3. Reinforcement III

- 0 = No braiding
- 1 = One braid of non-aramid fiber
- 2 = One braid of aramid fiber
- 3 = One braid of stainless steel wire
- 4 = One braid of steel wire
- 5 = One braid of iron wire
- 6 = One braid of iron wire, zinc-plated
- 7 = (open)
- 8 = Different pressure reinforcement

N-16

4. Core Material

- D = POM (Delrin)
- E = Ethylene tetrafluoroethylene (ETFE)
- Ethylene chlorotrifluoroethylene (ECTFE)
- F = Fluorinated ethylene propylene (FEP)
- H = Thermoplastic Elastomer-Ether-Ester — Hytrel®*
- M = Mixture/co-extruded
- N = Polyamide (Nylon)
- P = Polyethylene (PE)
- S = Special material
- T = Polytetrafluoroethylene (PTFE)
- U = Thermoplastic polyurethanes (TPU)
- V = Polyvinylidene Fluoride (PVDF)

N- 16

5. Hose Size (I.D.)

- 02 = 1/8" (3.2mm)
- 025 = 5/32" (4.0mm)
- 03 = 3/16" (4.8mm)
- 04 = 1/4" (6.4mm)
- 05 = 5/16" (7.9mm)
- 06 = 3/8" (6.4mm)
- 08 = 1/2" (12.7mm)
- 12 = 3/4" (19.0mm)
- 16 = 1" (25.4mm)
- 20 = 1-1/4" (31.8mm)
- 24 = 1-1/2" (38.1mm)
- 32 = 2" (50.8mm)
- 48 = 3" (76.0mm)

V30

6. Cover Material

- 0 = Polyurethane (PUR)
- 1 = Polyurethane (PUR) - seawater-resistant
- 2 = PEE
- 3 = Polyamide (PA) - Nylon (6, 11, or 12)
- 4 = Polyethylene (PE)
- 8 = Extra thick

V30

7. Cover Color

- 0 = Black
- 1 = Black (methanol-washed hose types)
- 2 = Blue
- 3 = Green
- 4 = Red
- 5 = Orange
- 6 = Yellow
- 7 = Gray
- 8 = Gold

*Registered trademark of DuPont™



For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Fitting Part Number Build



6Y4LX-9-3C

6

1. Design Type

- 1 = German-designed end fitting
- 6 = US-designed end fitting
- 2 = Reusable style end fittings

Y4

2. Connection Type

- | | |
|--------------------------------------|---------------------------------------------------------|
| 01 = NPT - Male | D9 = BSP Rigid - Male |
| 02 = NPT - Female | G2 = BSP Swivel 90° Elbow - Female |
| 06 = JIC 37° Flare - Female | 92 / BC = BSP Swivel - Female |
| 5Y = Medium Pressure Swivel - Female | 07 = NPS Swivel - Female |
| Y2 = Medium Pressure - Male | EZ = Waterblast Nozzle - Female |
| 6Y = High Pressure Swivel - Female | ZE = Waterblast Nozzle - Male |
| Y4 = High Pressure - Male | HY = Waterblast Nozzle - Female |
| RX = Reusable | YH = Waterblast Nozzle - Male |
| AY = Type "M" Swivel - Female | 3Z = Waterblast Nozzle - Male |
| YA = Type "M" Swivel - Male | HE = 2" Hammer Union, Cone w/ Wing Nut - Male |
| MB = STECKO | HN = 2" Hammer Union, Cone Threaded End w/ Seal- Female |
| C3 / C9 = METRIC Swivel - Female | TU = Tube Stub Fitting |

LX

3. Hose Series Designation

- 2X = 2840D, 2740D and 2640D Series Hoses
- 3X = 2022N Series Hoses
- 5X = All 2640 Series Hoses
- 8X = All 2244 and 2380 Series Hoses
- 9X = All 2300 Series Hoses
- AX = 2240D-025V34, 2245D-03V32 and 2243D-03V70
- BL = 2580N Series Hoses
- BS = 2388N Series Hoses
- CR = 57CR Series Hoses
- E2 = 2390N Series Hoses
- E3 = 2390N Series Hoses
- EX = 2020N Series Hoses
- HP = HP/HP8 Series Hoses
- HX = All 2740 Series Hoses
- KY = 2380N Series Hoses
- LX = All 2440 Series Hoses
- NX = 2240D-04 and 2300 Series Hoses
- PL = 2240D Series Hoses
- RX = 2020N-02V30 (Reusable Fittings)
- TX = 2240D and 2248D Series Hoses
- UX = 2448M Series Hoses
- WX = All 2840 Series Hoses

9

4. Connection Size

JIC / Type M

- 1 = 1/4" - 28 UNF
- 2 = 5/16" - 24 UNF
- 3 = 3/8" - 24 UNF
- 4 = 7/16" - 20 UNF
- 5 = 1/2" - 20 UNF
- 6 = 9/16" - 18 UNF
- 7 = 5/8" - 18 UNF
- 8 = 3/4" - 16 UNF
- 10 = 7/8" - 14 UNF
- 11 = 1" - 12 UNF
- 12 = 1-1/16" - 12 UNF
- 13 = 1-1/8" - 12 UNF
- 15 = 1-1/4" - 12 UNF
- 16 = 1-5/16" - 12 UNF
- 17 = 1-3/8" - 12 UNF
- 19 = 1-1/2" - 12 UNF
- 20 = 1-5/8" - 12 UNF

BSP

- 2 = G 1/8"
- 4 = G 1/4"
- 6 = G 3/8"
- 8 = G 1/2"

NPTF

- 1 = 1/16" - 27
- 2 = 1/8" - 27
- 4 = 1/4" - 18
- 6 = 3/8" - 18
- 8 = 1/2" - 14
- 12 = 3/4" - 14
- 16 = 1" - 11-1/2
- 20 = 1-1/4" - 11-1/2
- 24 = 1-1/2" - 11-1/2
- 32 = 2" - 11-1/2

MP & HP Tube

Sized by nominal tube O.D.

- 4 = 1/4" - 28 LH
- 6 = 3/8" - 24 LH
- 9 = 9/16" - 18 LH
- 12 = 3/4" - 16 LH
- 16 = 1" - 14 LH

3

5. Hose Size

- 2 = 1/8" hose
- 2A = 5/32" hose
- 3 = 3/16" hose
- 4 = 1/4" hose
- 5 = 5/16" hose
- 6 = 3/8" hose
- 8 = 1/2" hose
- 10 = 5/8" hose
- 12 = 3/4" hose
- 16 = 1" hose
- 24 = 1-1/2" hose
- 32 = 2" hose

C

6. Fitting Material

- C = Stainless steel
 - Blank = Carbon steel
- Any other materials will be noted in the Fitting section


For detailed ordering information, please consult price list or contact Parflex Division.

Hose Assembly Part Numbers

polyflex Hose Assembly Nomenclature



2390N		06	06	08	08
2390N	06	06	08	08	
Hose	Connection Type		Connection Size		
This series of numbers will indicate the hose base number. See pg. 5 for detailed hose part number breakdown. Example: 2390N - 04V16	These two digits will indicate the STYLE of connection End 1 and End 2. 01 = NPT Pipe, Male, Rigid 02 = NPT Pipe, Female, Rigid 06 = JIC 37° Female Swivel BC/92 = BSP Female Swivel AY = Type "M" Female Swivel YA = Type "M" Male (adapter ends) C3/C9 = Metric Female Swivel D9/3B = Male, BSP, Rigid, Straight Y1 = MP Nipple, Male w/ Gland Nut & Collar Y2 = MP Nipple, Male Y3 = HP Nipple, Male w/ Gland Nut & Collar Y4 = HP Nipple, Male Y5 = MP Flare, Male, Rigid Y6 = HP Flare, Male, Rigid 5Y = MP Flare, Female 6Y = HP Flare, Female HE = 2" Hammer Union, Cone w/ Wing Nut, Male HN = 2" Hammer Union, Cone Threaded End w/ Seal, Female TU = Tube Stub Fitting		These two digits will indicate the SIZE of connection End 1 and End 2. JIC / Type M 01 = 1/4" - 28 UNF 02 = 5/16" - 24 UNF 03 = 3/8" - 24 UNF 04 = 7/16" - 20 UNF 05 = 1/2" - 20 UNF 06 = 9/16" - 18 UNF 07 = 5/8" - 18 UNF 08 = 3/4" - 16 UNF 10 = 7/8" - 14 UNF 11 = 1" - 12 UNF 12 = 1-1/16" - 12 UNF 13 = 1-1/8" - 12 UNF 15 = 1-1/4" - 12 UNF 16 = 1-5/16" - 12 UNF 17 = 1-3/8" - 12 UNF 19 = 1-1/2" - 12 UNF 20 = 1-5/8" - 12 UNF BSP 02 = G 1/8" - 28 04 = G 1/4" - 19 06 = G 3/8" - 19 08 = G 1/2" - 14 NPTF 01 = 1/16" - 27 02 = 1/8" - 27 04 = 1/4" - 18 06 = 3/8" - 18 08 = 1/2" - 14 12 = 3/4" - 14 16 = 1" - 11-1/2 20 = 1-1/4" - 11-1/2 24 = 1-1/2" - 11-1/2 32 = 2" - 11-1/2 MP & HP Tube Sized by nominal tube O.D. 04 = 1/4" - 28 06 = 3/8" - 24 09 = 9/16" - 18 12 = 3/4" - 16 16 = 1" - 14		

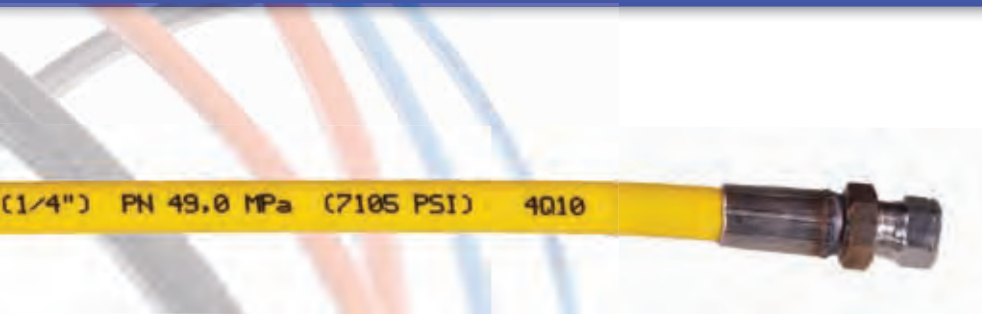

04 — **C** — **16** — **600**

04 Hose Size		
When specifying hose size, indicate the two-digit code.		
Hose I.D.	Hose Dash Size	Code
5/64"	012	1A
1/8"	02	02
5/32"	025	2B
3/16"	03	03
1/4"	04	04
5/16"	05	05
3/8"	06	06
1/2"	08	08
3/4"	12	12
1"	16	16
1-1/4"	20	20
1-1/2"	24	24
2"	32	32
3"	48	48

C Fitting Material
This letter indicates the material of the fittings used.
S = Carbon Steel
C = Stainless Steel

16 Hose Variation Number
This series of numbers will indicate the hose variation number. See pg. 5 for detailed hose part number breakdown.
Example: 2390N-04 V 16

600 Length
Indicate the assembly length in imperial units. This example is 600 inches.

Waterblast / Water Jetting



Parker Parflex provides the best ultra high pressure hoses and fittings to fill the needs of the market segments that utilize water blast and water jetting technologies.

Parflex provides the power generation and refining markets with small diameter, low volumetric expansion hoses for tight routing applications, such as high pressure heat exchanger tube cleaning in petro-chemical and power plants.

polyflex hoses are also ideal for construction applications such as hydrodemolition, industrial cleaning and surface preparation.

polyflex hoses are also used in industries where water cutting is utilized — cutting through everything

from chicken, in the food processing industry, to more industrial mediums like glass and concrete.

polyflex hoses are the highest quality ultra high pressure thermoplastic hoses on the market, and that makes them the best choice for any water blast or water jetting application.

The water jetting icon above indicates hoses that are suitable for these applications. A visual index of these hoses is on pgs. 11-12.


Applications

- Heat exchanger tube cleaning
- Water jet cutting: metal, concrete, glass, ceramics, plastics/rubber, stone
- Surface preparation
- Deburring
- Pavement Maintenance
- Tank cleaning
- Boiler cleaning
- Paint removal
- Cooling towers
- Hydrodemolition systems
- Sewer jetting
- Ship cleaning
- Rubber removal from airport runways
- Ultra high pressure food pasteurization
- Ultra high pressure water jet surgery






Markets

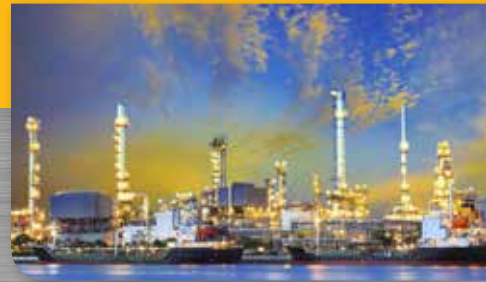
- Industrial Cleaning
- Power Generation
- Chemical Refining
- Machine Tools
- Highway Maintenance
- Construction
- Marine
- Food Processing











Visual Index of Waterblast / Water Jetting Hoses



2200 Series	2240D	High pressure service for tube cleaning applications such as heat exchangers / Flexible lance	2244N	High pressure service for the construction and shipbuilding industries / General industrial cleaning applications	2248D	Tube cleaning hose
		A-15		A-17		A-15




2300 Series	2380N-...W	Construction and shipbuilding industries / General industrial cleaning applications	2388N-...W	Construction and shipbuilding industries / General industrial cleaning applications
		A-23		A-27

2400 Series	2440D	High pressure heat exchanger tube cleaning	2440N	Construction and shipbuilding industries / General industrial cleaning applications	2448D	High pressure heat exchanger tube cleaning
		A-31		A-33		A-31

2500 Series	2580N	General industrial cleaning in construction and shipbuilding industries / Hydrodemolition
		A-37

2600 Series	2640D	Construction and shipbuilding industries / General industrial cleaning applications	2640N	Construction and shipbuilding industries / General industrial cleaning applications
		A-39		A-41

2700 Series	2740D	Tight routing applications, such as high pressure heat exchanger tube cleaning	2741D	Construction and shipbuilding industries / High pressure lance
		A-43		A-45

2800 Series	2840D	Water jet cutting equipment with water only or with abrasive additives / Hydroforming	2841D	Very high pressure lances up to 40,610 psi	2849D	Water jet cutting equipment with water only or with abrasive additives / Hydroforming
		A-47		A-49		A-51

For detailed ordering information, please consult price list or contact Parflex Division.

Oil & Gas



The Parflex and Polyflex divisions of Parker Hannifin have been supplying a wide range of thermoplastic hose products to the oil and gas market for over 30 years.

With production plants in both the USA and Europe, supported by Parker's global sales and distribution network, customers can benefit from local service and the supply of quality parts wherever they are situated.

polyflex hoses can be used in a wide variety of Oil & Gas applications, both onshore and offshore, and are available with seawater resistant cover materials.

The Oil & Gas icon above indicates hoses with applications in the Oil & Gas industry, such as, umbilical and jumper hoses, BOP and hotline hoses, hydraulic control and testing hoses and large bore hoses for well servicing.

A visual index of Oil & Gas hoses can be found on pgs. 15-16.

Applications

- Umbilical Hose
- BOP Stack Hose
- Oilfield Well Service
 - Cementing
 - Chemical injection
 - Well intervention
- Gas transfer
- High volume flow rate pumping offshore
- Wireline / Grease injection
- Pressure testing
- Snubbing and hydraulic workover systems
- Nitrogen pumping
- Perforating
- Well equalization lines



Markets


- Onshore Drilling
- Offshore Drilling
- Offshore Production











Visual Index of Oil & Gas Hoses

2000 Series	2022N-... 5K	Long-length hose and hose umbilicals / Oilfield pressure control devices / Offshore oil applications	2022N-... 10K	Long-length hose and hose umbilicals / Oilfield pressure control devices / Offshore oil applications
	 A-13		 A-13	

2200 Series	2244N	Offshore applications, including methanol injection, control fluids and well stimulation
	 A-17	

2300 Series	2380N	Long-length subsea umbilical hose	2388N	Grease injection hose	2390N	Subsea hydraulic controls / Long-length hot line hose / BOP stack control lines
	 A-25		 A-27		 A-29	

2400 Series	2440N	Long-length subsea umbilical hose	2448N	Long-length subsea umbilical hose
	 A-35		 A-35	

2600 Series	2640D	Ultra high pressure umbilical hose
	 A-39	

Sea Wolf	57CR	Offshore oil field exploration and production applications
	 A-53	



ChemJec	2440M	Long-length subsea umbilical hose	2448M	Long-length subsea umbilical hose	2640M	Long-length subsea umbilical hose
		A-65		A-65		A-65

Black Eagle / Golden Eagle		2240N-48V80	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation	2440N-48V80	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation	2448N-32V30	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation
			A-61		A-61		A-59
2580N-32V80	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation	2640N-24V80	Water and gas injection hose / Acidizing / Mud circulation	2640N-24V80-15K	Water and gas injection hose / Acidizing / Mud circulation	2640N-48V80	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation
	A-59		A-57		A-57		A-61
2648N-32V80	Water and gas injection hose / Acidizing / Mud circulation	2240N-32V10	Cementing Hose	2248N-32V10	Cementing Hose	2448M-32V88	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation
	A-59		A-63		A-63		A-65
2580M-32V88	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation	2640M-24V88	Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation				
	A-65		A-65				

For detailed ordering information, please consult price list or contact Parflex Division.

Hydraulic



Parflex also offers a number of hoses for high pressure hydraulic applications.

polyflex hoses can be used to power hydraulic tools, such as torque wrenches and bolt tensioners. They are also used on rescue equipment such as the Jaws of Life and similar tools.

Hoses can be easily bonded to create twin-line and multi-line assemblies.

Other suitable hydraulic applications include test rigs and pressure testing equipment.

The hydraulic icon above indicates hoses that are suitable for hydraulic applications. A visual index of these hoses can be found on pgs. 19-20.

Applications

- Rescue tools (i.e. Jaws of Life)
- Torque wrenches
- Bolt tensioners
- Pressure testing
- Power Units
- Hydraulic Jacks





Markets






- Rescue Tools
- Hydraulic Tools
- Automotive
- Airports & Military Bases
- Engineering & Test Facilities
- Manufacturers using Hydraulic Presses
- Hydraulic Service/Repair Facilities
- Construction Equipment





Visual Index of Hydraulic Hoses

2000 Series	2020N	Mini-hydraulic and gas applications/ Measuring and diagnostic systems	2022N-04 5K or 10K	High pressure hydraulics, pneumatics and lubricating oils / High pressure tools / Jacks/ Test apparatus
	 A-11		 A-13	

2200 Series	2244N	For use with petroleum or synthetic hydraulic fluids, gas applications and compressors
	 A-17	

2300 Series	2370N	For use with petroleum or synthetic hydraulic fluids / hydraulic tools, clamps, rescue equipment	2380F-08	Applications with aggressive fluids / Glue applications in automotive industry	2380N	Hydraulic controls / Test systems with synthetic and phosphate ester fluids (e.g. Skydrol)
	 A-19		 A-21		 A-25	
	2388N	Hydraulic Jacks / Bolt tensioning	2390N	Pressure testing /Portable hydraulic tools / Offshore hydraulic systems		
	 A-27		 A-29			

HP Series	HP	High pressure hydraulic, pneumatic and lubricating oils / High pressure tools / Rigging jacks / Test apparatus / Oilfield pressure control devices	HP8	High pressure hydraulic, pneumatic and lubricating oils / High pressure tools / Rigging jacks / Test apparatus / Oilfield pressure control devices / Aerial lift equipment
	 A-55		 A-55	

Hose

High Pressure and
Ultra High Pressure
Thermoplastic

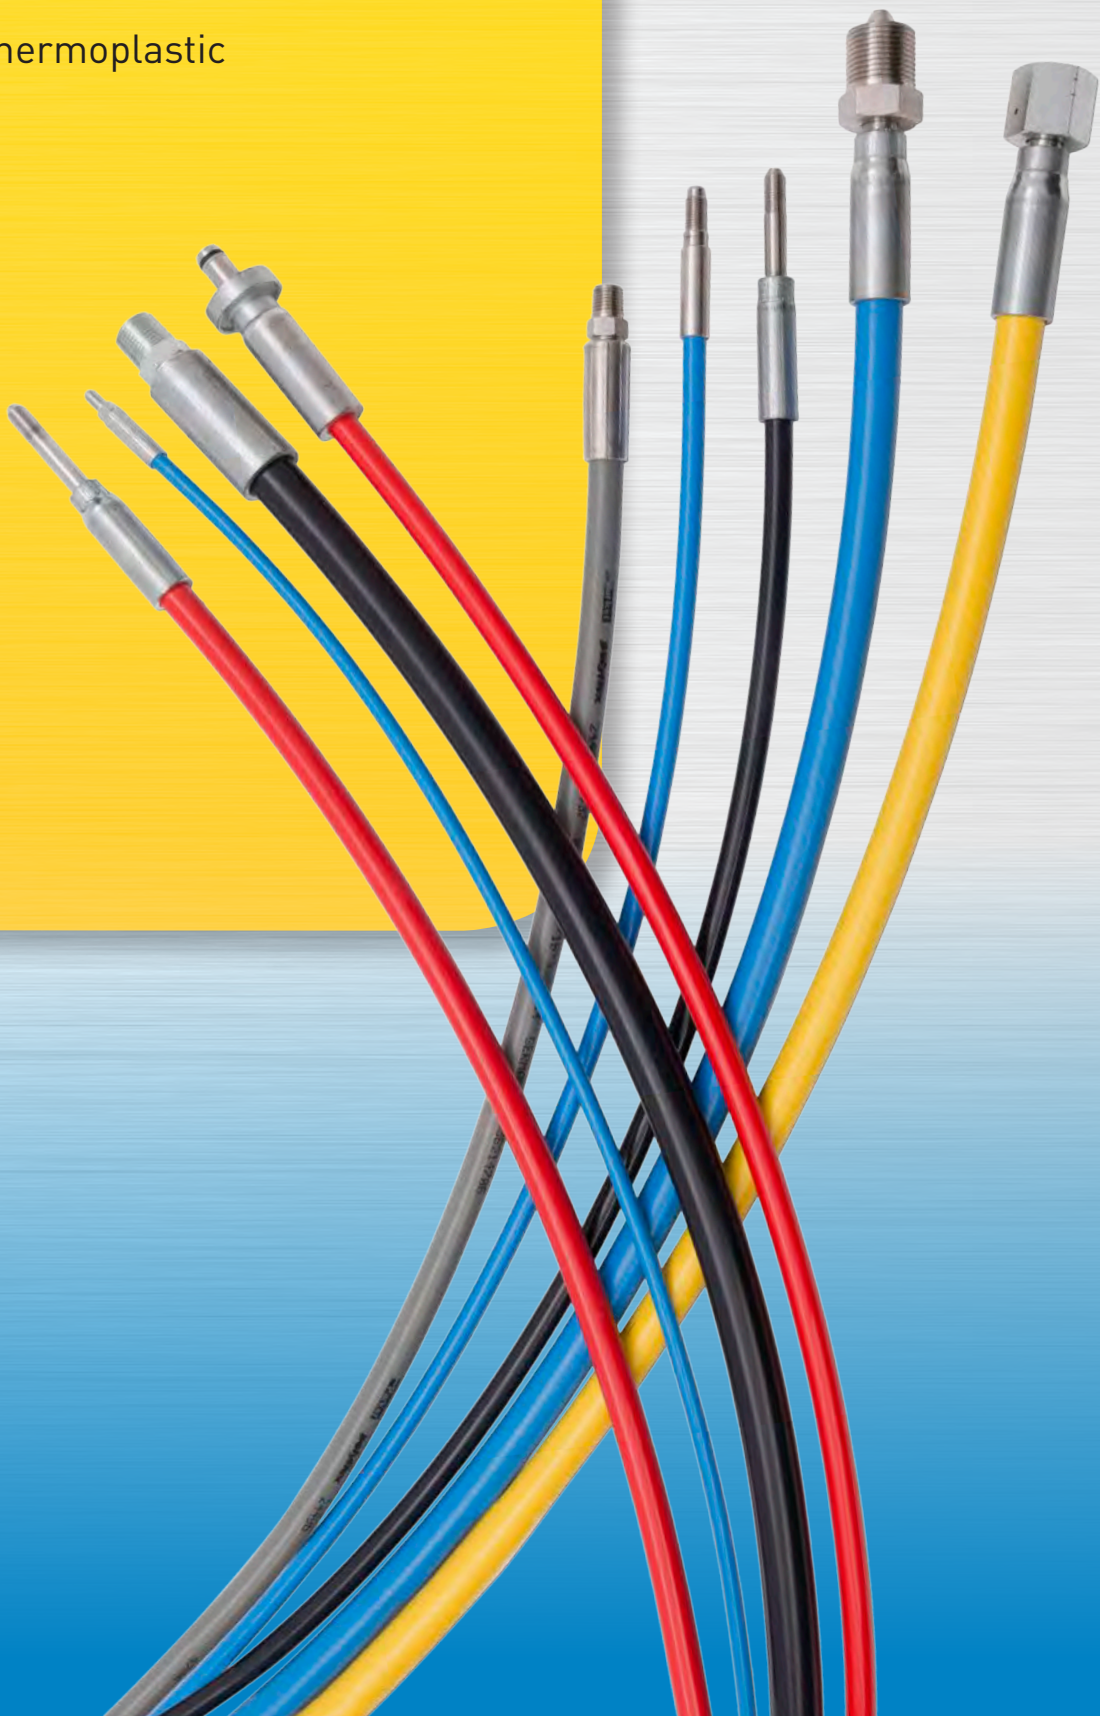


Table of Contents

Introduction

Why polyflex Thermoplastic Hose?	A-2
polyflex Hose Safety	A-3
How to Read the Hose Section	A-4
Hose Selection - by Working Pressure - Waterblast Hoses	A-5
Hose Selection - by Working Pressure - Hydraulic Hoses	A-7
Hose Selection - by Working Pressure - O&G Hoses	A-9

polyflex Thermoplastic Hose

2000 Series	A-11
2020N	A-11
2022N	A-13
2200 Series	A-15
2240D/2248D	A-15
2244N	A-17
2300 Series	A-19
2370N	A-19
2380F	A-21
2380N-...W	A-23
2380N	A-25
2388N	A-27
2390N	A-29
2400 Series	A-31
2440D/2448D	A-31
2440N - Waterblast Hose	A-33
2440N/2448N	A-35
2500 Series	A-37
2580N	A-37
2600 Series	A-39
2640D	A-39
2640N	A-41
2700 Series	A-43
2740D/2749D	A-43
2741D	A-45
2800 Series	A-47
2840D	A-47
2841D	A-49
2849D	A-51
57CR / Seawolf	A-53
HP Series	A-55
HP/HP8	A-55
Black Eagle	A-57
1-1/2" Black Eagle	A-57
2" Black Eagle	A-59
3" Black Eagle	A-61
Black Eagle Light	A-63
Golden Eagle	A-65
ChemJec	A-67

Why Thermoplastic?

Easy and Quick Installation

- ◆ Very small sizes starting with inner diameters of 2 mm (DN2 or -012). Typical disadvantages that come with using oversized hoses, such as extensive costs, waste of space, extensive weight, and complicated installation, can be avoided
- ◆ Lightweight by design – possible weight reduction of more than 50% when compared to conventional hydraulic hoses
- ◆ Very small outer diameters due to compact design
- ◆ Small bend radii to save installation space
- ◆ Long, continuous hose lengths up to 4000 m help minimize scrap due to unusable cut-off pieces and often render connection joints unnecessary
- ◆ Wide range of colours for easy identification of hose function and to harmonize the appearance of machine and hose
- ◆ Easy cutting and processing, especially with textile fiber reinforced hose types.

Outstanding Performance

- ◆ Very high working pressures up to 58,000 psi
- ◆ Reduced pressure loss due to smooth core tubes
- ◆ Electrically Conductive Hoses according to SAE J517
- ◆ Volumetric expansion according to customers needs
- ◆ High purity of the extremely smooth core tube reduces the danger of contamination of the hydraulic system caused by deposits in the hose
- ◆ Excellent abrasion resistance
- ◆ High collapse pressure
- ◆ Long shelf life
- ◆ Individual customer hose bundles
- ◆ Customer specific hose marking

Dedicated Features

- ◆ Outstanding chemical resistance
 - of hose outer cover against environmental effects
 - of hose core tube against media
- ◆ Long service life due to excellent UV- and ozone-resistance
- ◆ Seawater-resistant hose materials
- ◆ Wide temperature range from -40°F up to 212°F
- ◆ Easily bond hoses together into twinline or multiline assemblies to achieve space-saving and compact units
- ◆ Suitable for industrial gases

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



polyflex Hose Safety

For Your Safety

The hose assemblies listed in this catalog are all special constructions with the hose having up to eight spiral layers of steel wire. Due to this construction, pressures are achieved which far exceed international standards. These hose types are manufactured and tested according to the **polyflex** standards which have proved to be effective over many years.

polyflex hose assemblies are used at considerable working pressures. The critical area of a hose assembly is the connection between flexible hose and rigid fitting (crimping area). Only the use of original **polyflex** components (hose, fittings and tooling) and full compliance with the **polyflex** assembly instructions can guarantee safety and conformity with standards. It is essential that training be given to customers in the hose assembly process in order to make high quality **polyflex** maximum pressure hose assemblies.

For the production and testing of the hose assemblies relevant to the applications, the guidelines and technical regulations, as well as, the protection and hazard prevention rulings must be adhered to.

You, as the manufacturer of **polyflex** hose assemblies, are obliged to mark these hose assemblies according to the regulations and to verify their safety by a final pressure test.

Non-compliance with these rules can lead to the premature failure of the hose assembly and the loss of warranty.



- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Treat high pressure hose with extreme caution. polyflex hoses are ultra high pressure hoses, not garden hoses, and should be treated like high pressure vessels. • Always inspect for frayed, damaged or worn spots before using. • Check the end connections for wear, rust, cracks or other deterioration which could produce a dangerous projectile. • Know the working pressures and burst pressures of all hoses before using them. • Always use clean, filtered medium to prolong hose life. • Always clean, drain and coil hoses after use. • Use only hoses assembled by an authorized Parker distributor. | <ul style="list-style-type: none"> • Never fix a hose at the sleeves. • Never use a hose with cuts or wire showing through the outer cover. • Never use a hose with bubbles, listers or kinks. • Don't exceed the bend radius and pressure rating for each hose. • Don't run over the or crush the hose with vehicles. • Hoses with corroded or leaking end connections should be avoided. • Avoid using dirty medium or medium with sulfur compound in it. • Don't bend the hose over scaffolding or pull heavy equipment with the hose. • Don't let hose support its own weight off towers or buildings. • Never use hose without hose arrestors (containment grips). • Don't expect water jetting or hydraulic hose to last forever. • Don't change or repair a hose without instructions from the manufacturer. • Never disconnect a hose under pressure. |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

How to Read the Hose Section

1	2	3	4	5	6	7	8
Part Number	Jacket Color	Nominal I.D.	Maximum O.D.	Maximum Working Pressure	Minimum Bend Radius	Weight	Fitting Series
#							
		inch mm	inch mm	psi MPa	inch mm	lbs/ft kg/m	
2440N-16V37	Gray	1 25.0	1.47 37.4	8,160 56.2	11.8 300	1.34 2.00	LX

NOTE: The imperial measurements are in black. The metric equivalents appear in blue.

1 Part Number

Hose Series Part Number - gives the construction and core tube material of the hose

2 Jacket Color

Color of the hose jacket

3 Inside Diameter

Distance between inner walls of the core tube.

4 Outside Diameter

Nominal diameter of the hose

5 Working Pressure

Working pressure rating must meet or exceed the maximum operating pressure of the system including pressure spikes.

Working pressure listed is dependent on application. Water blast applications will typically have a 2.5:1 design factor. Hydraulic and Oil & Gas applications will typically have a 4:1 design factor. Contact Parflex division for detailed hose performance criteria.

6 Minimum Bend Radius

Minimum radius that the hose can be bent. Exceeding the bend radius can cause kinking, inner tube washout, or excessive stress on reinforcement resulting in shortened service life.

7 Weight

Provided in lbs/ft and kg/m

8 Approved Fitting

Approved fitting series for selected hose. Technical information for fittings is provided in Section B.

Hose Selection Chart

Nominal Size				Working Pressure psi [MPa]									
				2020N	2240D	2248D	2244N-...W	2380N-...W	2388N-...W	2440D	2448D		
DN	size	inch	mm										
2	-012	5/64	2.0	11,020 (76.0)									
3	-02	1/8	3.2		15,950 (110.0)					30,000 (207.0)			
4	-025	5/32	4.0		17,400 (120.0)	21,750 (150.0)				31,900 (220.0)	43,645 (301.0)		
5	-03	3/16	4.8		15,955 (110.0)					26,100 (180.0)			
6	-04	1/4	6.4		15,950 (110.0)			15,950 (110.0)	18,560 (128.0)	23,780 (164.0)			
8	-05	5/16	7.9		13,050 (90.0)			14,500 (100.0)		21,750 (150.0)			
10	-06	3/8	9.5										
12	-08	1/2	12.7				12,760 (88.0)		15,950 (110.0)				
20	-12	3/4	19.0										
25	-16	1	25.4										
Fitting Series				EX	PL AX NX	TX	LX	KY LX	KY BS	LX	LX		
Page #				A-11	A-15	A-15	A-17	A-23	A-27	A-31	A-31		

Working Pressure - Waterblast

A Hose

	2440N	2580N	2640D	2640N	2740D	2741D	2840D	2841D	2849D
	12,500 (87.5)		40,600 (280.0)		43,500 (300.0)				
	12,688 (87.5)		36,230 (250.0)		40,600 (280.0)		*58,000 (400.0)		
	20,300 (140.0)								
					36,230 (250.0)	36,230 (250.0)	43,500 (300.0)	43,500 (300.0)	55,000 (380.0)
		23,200 (160.0)							
	20,300 (140.0)	20,300 (140.0)		26,100 (180.0)			36,250 (250.0)		
	14,500 (100.0)	17,400 (120.0)		20,300 (140.0)					
	13,050 (90.0)			*17,400 (120.0)					
	LX	BL	2X	5X	2X	2X	2X WX	2X	WX-55
	A-33	A-37	A-39	A-41	A-43	A-45	A-47	A-49	A-51

* Not DIN EN 1829-2 qualified. Others are with PFDE fittings.

B Fittings

C Adapters &
Valves

D Quick Couplings

E Accessories

F General Technical

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



Hose Selection Chart

Dimensions →		DN	2	3	4	5	6	8	
		size	-012	-02	-025	-03	-04	-05	
Hose Type ↓		inch	5/64	1/8	5/32	3/16	1/4	5/16	
		mm	2	3.2	4	4.8	6.4	7.9	
Working Pressure psi [MPa]	2020N	6,890 (47.5)	5,800 (40.0)						0.95 in
	2022N-...5K						5,000 (34.5)		
	2022N-...10K						10,000 (69.0)		
	2244N				10,875 (75.0)				
	2370N								
	2380F								
	2380N						10,150 (70.0)	8,500 (586.0)	
	2388N						11,600 (80.0)		
	2390N						7,107 (49.0)		
	2580N-...MSHA								
	HP / HP8					10,000 (69.0)	10,000 (69.0)		

Working Pressure - Hydraulic

Hose
A

	10	12	20	25	32	Fittings	Page
	-06	-08	-12	-16	-20		
	3/8	1/2	3/4	1	1 1/4		
	9.5	12.7	19	25.4	31.8		
						EX / RX	A-11
	5,000 (34.5)	5,000 (34.5)				55	A-13
	10,000 (69.0)	10,000 (69.0)				8X / 3X / LX	A-13
		7,975 (55.0)				8X	A-17
		5,075 (35.0)	4,350 (30.0)	3,985 (27.5)		9X / NX	A-19
		4,712 (32.5)				NX	A-21
		7,975 (55.0)		5,510 (38.0)	3,985 (27.5)	8X / NX	A-25
						8X	A-27
		6,017 (41.5)	5,075 (35.0)	4,060 (28.0)		8X / 9X / E2 / E3	A-29
		10,150 (70.0)					A-37
	8,000 (55.2)					HP	A-55

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



A-8

Hose Selection Chart

Dimensions →		DN	6	8	10	12	20	
		size	-04	-05	-06	-08	-12	
Hose Type ↓		inch	1/4	5/16	3/8	1/2	3/4	
		mm	6.4	7.9	9.5	12.7	19	
Working Pressure psi [MPa]	High Pressure Aramid Hose							
	2022N-...5K	5,000 (34.5)			5,000 (34.5)	5,000 (34.5)		
	2022N-...10K	10,000 (69.0)			10,000 (69.0)	10,000 (69.0)		
	57CR					5,000 (34.5)		
	High Pressure Wire Hose, Polyamide							
	2380N							
	2390N	7,107 (49.0)			6,450 (44.5)	6,017 (41.5)	5,075 (35.0)	
	2440N	12,500 (87.5)			12,688 (87.5)	11,745 (81.0)	10,000 (69.0)	
	2440N-...10K							
	2448N	15,000 (103.5)				12,688 (87.5)		
	2640N						12,500 (87.5)	
	High Pressure Wire Hose, ChemJec							
	2440M	12,500 (87.5)	10,000 (69.0)	10,000 (69.0)	10,000 (69.0)			
	2448M	15,000 (103.5)	15,000 (103.5)	15,000 (103.5)				
	2640M					15,000 (103.5)		
	BOP and Hotline Hoses							
	2390N	7,107 (49.0)				6,017 (41.5)	5,075 (35.0)	
	Large Bore for Well Servicing (Black Eagle and Golden Eagle)							
	2240N							
	2248N							
	2440N							
	2448N							
	2580N							
	2640N							
	2640N-...15K							
	2648N							
	2448M							
	2580M							
	2640M							

Working Pressure - Oil & Gas Applications

Hose
A

	25	32	40	50	78	Fittings	Page
	-16	-20	-24	-32	-48		
	1	1 1/4	1 1/2	2	3		
	25.4	31.8	38.1	50.8	76		
						55	A-13
						8X/3X/LX	A-13
	5,000 (34.5)					CR	A-53
	5,510 (38.0)					8X Subsea	A-25
	4,060 (28.0)					8X/9X/LX/SS	A-29
	8,120 (56.0)					5X/LS/LX	A-35
	10,000 (69.0)					LX	A-35
						8X/LX	A-35
						5X	A-41
						8X/LX	A-67
						UX/LX	A-67
						5X	A-67
	4,060 (28.0)					8X/9X/E2/E3	A-29
				3,000 (20.7)	5,000 (34.5)	TX/S6	A-61/A-63
				5,000 (34.5)		S6	A-63
					10,000 (69.0)	LX	A-61
				5,000 (34.5)		5X	A-59
				10,000 (69.0)		5X	A-59
			10,000 (69.0)		15,000 (103.5)	5X	A-57/A-61
			15,000 (103.5)			5X	A-57
				15,000 (103.5)		CX	A-59
				5,000 (34.5)		5X	A-65
				10,000 (69.0)		5X	A-65
			10,000 (69.0)			5X	A-65

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



2020N - High Pressure Hose

Features & Applications



- Very small hose I.D.
- Very flexible hose
- High pressure services where very small hose O.D. is required
- Versatile usage in mini-hydraulic and gas applications
- Measuring and diagnostic systems



Markets

- Waterblast

Certifications

- DIN EN1829-2 compliant

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2020N-012R30	Black	2	5/64	2.0	0.20	4.9	11,020	76.0	0.79	20	0.01	0.02	EX



Markets

- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2020N-012R30	Black	2	5/64	2.0	0.20	4.9	6,890	47.5	0.79	20	0.01	0.02	EX
2020N-02V30	Black	3	1/8	3.2	0.24	6.0	5,800	40.0	1.20	30	0.02	0.02	EX/RX*

Construction

Core Tube: Polyamide

Reinforcement: One braided layer of high tensile strength synthetic fiber

Cover: Polyamide, -012 pin-pricked on request

Options

Colors: ● Black

Temperature Range

-012 sizes: -40°F to +180°F (-40°C to +82.2°C)

-02 sizes: -40°F to +212°F (-40°C to +100°C) with petroleum or synthetic hydraulic fluids and gases

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Not for use in airless paint spray or solvent spraying applications. Not a static dissipative hose.


Hose must be pin-pricked for gas service.

*RX Series fittings are field assembled. Contact the division for more information.

2020N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2020N-012R30	2020N-02V30
Fitting Part Numbers 	101EX-2-012 101EX-4-012 106EX-4-012 1C9EX-6-012 1C9EX-8-012	106EX-4-02 1C9EX-8-02 201RX-2-2C 206RX-4-2C 2TURX-4-2C 601EX-2-2C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers
#	Bend Restrictor
2020N-02V30	MBR003 (w/ reusable fittings) MBR004 (w/ crimp fittings)

2022N - High Pressure Hose



Features and Applications

- Flexible and lightweight with excellent pressure capabilities
- Smooth bore for improved flow rate and low pressure drop
- ISO 13628-5 "Specification for Subsea Production Control Umbilicals", Section 7.9 Hose construction
- Long-length hose and hose umbilicals requiring lightweight construction
- Oilfield pressure control devices
- Offshore oil applications (control fluids, acidizing, methanol injection, well stimulation)
- High pressure hydraulics, pneumatics and lubricating oils
- High pressure tools
- Jacks
- Test apparatus



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2022N-04V91-5K	Black	6	1/4	6.4	0.50	12.7	5,000	34.5	2.01	51	0.08	0.12	55*
2022N-04V91-10K	Black	6	1/4	6.4	0.54	13.8	10,000	69.0	3.94	100	0.09	0.14	8X
2022N-06V91-5K	Black	10	3/8	9.5	0.63	16.1	5,000	34.5	2.99	76	0.10	0.15	55*
2022N-06V91-10K	Black	10	3/8	9.5	0.75	19.0	10,000	69.0	3.94	100	0.16	0.24	3X
2022N-08V91-5K	Black	12	1/2	12.7	0.82	20.8	5,000	34.5	4.00	102	0.11	0.17	55*
2022N-08V91-10K	Black	12	1/2	12.7	0.97	23.2	10,000	69.0	3.94	100	0.23	0.34	LX

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement: High tensile aramid fiber

Cover: Sea water resistant Polyurethane, pin-pricked on request to allow adequate venting of permeable fluids

Options

Colors: ● Black

Temperature Range

-40°F to +131°F (-40°C to +55°C)

Notes


Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

*For Parkrimp crimpers, refer to the crimp instructions in CAT 4460.

2022N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2022N-04V91-5K	2022N-04V91-10K	2022N-06V91-5K	2022N-06V91-10K	2022N-08V91-5K	2022N-08V91-10K
Fitting Part Numbers 	19255-4-4C 1C955-8-4C 1C955-10-4C 1C955-12-4C 10655-4-4C 10655-6-4C	1068X-6-04C 1C98X-8-04C 1C98X-10-04C 1AY8X-6-04C 1068X-4-04C	10655-6-6C 1C955-12-6C 19255-6-6C	1063X-6-06C 1C93X-14-06C 1C93X-16-06C 1923X-8-06C 1063X-8-06C	10655-8-8C 19255-8-8C 1C955-16-8C 10655-6-8C	106LX-8-08C 192LX-8-08C 1C9LX-16-08C 106LX-12-08C

Accessories

Technical details available in Section E.

2240D/2248D - High Pressure Tube Cleaning Hose



Features and Accessories

- DIN EN1829-2 compliant
- 20% smaller O.D. than existing competitor products
- High pressure service for tube cleaning applications, such as, heat exchanger tube cleaning in the chemical and refining industries
- Flexible lance at working pressures of 13,000 psi and above



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2240D-02V33	Green	3	1/8	3.2	0.28	7.1	15,950	110.0	2.36	60	0.05	0.07	PL
2240D-025V36	Yellow	4	5/32	4.0	0.30	7.7	17,400	120.0	2.95	75	0.07	0.10	AX
2240D-025V33	Green	4	5/32	4.0	0.30	7.7	17,400	120.0	2.95	75	0.07	0.10	AX
2240D-03V33	Green	5	3/16	4.8	0.37	9.5	15,955	110.0	3.74	95	0.09	0.13	AX/TX
2240D-03V36	Yellow	5	3/16	4.8	0.37	9.5	15,955	110.0	3.74	95	0.09	0.13	AX/TX
2240D-04V36	Yellow	6	1/4	6.4	0.46	11.6	15,950	110.0	4.33	110	0.13	0.20	NX/TX
2240D-04V33	Green	6	1/4	6.4	0.46	11.6	15,950	110.0	4.33	110	0.13	0.20	NX/TX
2240D-05V36	Yellow	8	5/16	7.9	0.53	13.4	13,050	90.0	4.72	120	0.17	0.25	TX/AX
2248D-025V32	Blue	4	5/32	4.0	0.31	7.9	21,750	150.0	2.95	75	0.07	0.11	TX
2248D-03V32	Blue	5	3/16	4.8	0.37	9.5	20,300	140.0	3.74	95	0.09	0.14	TX

Construction

Core Tube: Polyoxymethylene

Reinforcement: Two spiral layers of high tensile steel wire

Cover: Polyamide

Options

Colors: ● Blue
● Green
● Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2240D/2248D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2240D-02V33	2240D-025V3x	2240D-03V3x	2240D-04V3x
Fitting Part Numbers 	101TX-2-02W 106TX-4-02W 1AYTX-6-02W 601PL-1-2	601AX-1-2A 601AX-2-2A 606AX-4-2A 6AYAX-6-2A 6EZAX-5-2A 6ZEAX-5-2A	101TX-4-03W 106TX-6-03W 1AYTX-6-03W 601AX-2-3	601NX-2-4 601NX-4-4 601NX-4-4C 602NX-4-4 606NX-4-4C 606NX-6-4C 6AYNX-6-4C
	2240D-05V36	2248D-025V32	2248D-03V32	
	101TX-4-05W 1YHTX-6-05W 1YHTX-6-05W-LH 601AX-4-5 601AX-6-5	101TX-1-025 101TX-2-025 102TX-1-025 1YHTX-4-025	101TX-1-03 101TX-2-03 101TX-4-03 102TX-2-03 1YHTX-6-03	

Fittings
BAdapters &
Valves
C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers		
#	Containment Grip	Bend Restrictor	Hose Stop
2240D-03V3x	MCG001SS MCGHS10-15	N/A	N/A
2240D-04V3x	MCG001SS MCGHS10-15	MBR008	N/A
2240D-05V36	MCG001SS MCGHS10-15	N/A	N/A
2240D-025V3x 2248D-025V32	N/A	N/A	AH-025S
2240D-03V3x 2248D-03V32	N/A	N/A	AH-03S
2240D-04V3x	N/A	N/A	AH-04S
2240D-05V36	N/A	N/A	AH-05S

Quick Couplings
DAccessories
EGeneral Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

2244N - High Pressure Hose

Features and Applications



- High pressure waterblast service for the construction and shipbuilding industries
- General industrial cleaning applications — mainly used to remove different kinds of dirt accumulation, or materials from various surfaces, such as those in tanks, from concrete, asphalt, etc.



Markets

- Waterblast

Certifications

- DIN EN1829-2 compliant

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2244N-08V16W	Yellow	12	1/2	12.7	0.90	22.9	12,760	88.0	5.91	150	0.54	0.80	LX



Markets

- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2244N-025V00	Black	4	5/32	4.0	0.38	9.6	10,875	75.0	2.17	55	0.13	0.19	8X
2244N-08V71	Black	12	1/2	12.7	0.89	22.7	7,975	55.0	5.91	150	0.54	0.80	8X

Construction

Core Tube: Polyamide (V00)

Polyamide 11, methanol washed (V71)

Reinforcement: Two spiral layers, and one braided layer of high tensile steel wire

Cover: Polyurethane

Temperature Range

-08 hoses: +14°F to +158°F (-10°C to +70°C)

-025 hose: -40°F to +212°F (-40°C to +100°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


Options

Colors: ● Black

2244N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2244N-08V16W	2244N-025V00	2244N-08V71
Fitting Part Numbers 	1AYLX-11-08 1C9LX-16-08	6018X-2-2A 6018X-2-2AC 6018X-4-2AC 6068X-4-2AC 6AY8X-6-2AC 1018X-4-025	6018X-8-8C 6068X-8-8C 6AY8X-11-8C

Fittings
B

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers				
#	Heavy Duty Abrasion Cover	Cover Sleeves	Spring Guard	Containment Grip	Bend Restrictor
2244N-025V00	N/A	N/A	N/A	N/A	MBR008
2244N-08V71	MHDC018	216-200-18	MSG4113	MCG005SS	N/A

Adapters &
Valves
CQuick Couplings
DAccessories
EGeneral Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

2370N - High Pressure Hose

Features and Applications

- High pressure service for use with petroleum or sythetic hydraulic fluids in hydraulic systems
- Especially suitable for hydraulic tools, clamps, rescue equipment
- Suitable for use with phosphate ester fluid



Markets

- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2370N-08V30	Black	12	1/2	12.7	0.79	20.0	5,075	35.0	5.90	150	0.28	0.42	9X / NX

Construction

Core Tube: Polyamide

Reinforcement: Two spiral layers of high tensile steel wire and one braided layer of iron wire

Cover: Polyamide

Options

Colors: ● Black

Temperature Range

-40°F to +140°F (-40°C to +60°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2370N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2370N-08V30
Fitting Part Numbers 	1019X-8-08 1019X-8-08C 1069X-8-08 1069X-8-08C 1069X-10-08 1C99X-16-08 10C9X-16-08

Accessories

Technical details available in Section E.

2380F - High Pressure Hose

Features and Applications

- FEP inner core offers exceptional chemical resistance
- Inert to virtually all hydraulic and chemical fluids
- Suitable for applications with aggressive fluids
- Glue applications in the automotive industry
- Material lines for temperatures below +80°C



Markets

- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2380F-08V07	Gray	12	1/2	12.7	0.81	20.5	4,712	32.5	5.51	140	0.34	0.58	NX

Construction

Core Tube: Fluorinated ethylene propylene (FEP)

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Gray

Temperature Range

-40°F to +176°F (-40°C to +80°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2380F - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2380F-08V07
Fitting Part Numbers 	106NX-8-08 101NX-8-08

Accessories

Technical details available in Section E.

2380N....W- High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Low volumetric expansion
- Available in long lengths
- Replaces high pressure, rigid tubing where vibration and routing constraints are issues
- High pressure service in construction and shipbuilding industries
- General industrial cleaning applications



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2380N-04V03W	Green	6	1/4	6.4	0.52	13.3	15,950	110.0	2.80	70	0.18	0.27	KY
2380N-04V06W	Yellow	6	1/4	6.4	0.52	13.3	15,950	110.0	2.80	70	0.18	0.27	KY
2380N-05V06W	Yellow	8	5/16	7.9	0.62	15.8	14,500	100.0	3.54	90	0.24	0.35	KY

Construction

Core Tube: Polyamide

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Green
● Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2380N...W - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2380N-04V0xW	2380N-05V0xW
Fitting Part Numbers 	101KY-2-04 101KY-4-04 1AYKY-6-04	101KY-4-05 101KY-6-05 1AYKY-8-05 1Y4KY-9-05

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers					
#	Heavy Duty Abrasion Cover	Cover Sleeves	Spring Guard	Containment Grip	Bend Restrictor	Hose Stop
2380N-05V0xW	MHDC012	510-A-500-12	N/A	MCG001SS MCGHS10-15	MBR012	AH-06S

2380N - High Pressure Hose

Features and Applications



- Small diameters available
- Low volumetric expansion
- Available in long lengths and twinline construction
- Replaces high pressure, rigid tubing where vibration and routing constraints are issues
- Used for hydraulic controls and test systems with synthetic fluids
- Portable hydraulic tools
- V91 hoses are for offshore oil applications (control fluids, acidizing, methanol injection and well stimulation)
- V3x hose can be used with phosphate ester fluids



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2380N-04V00	Black	6	1/4	6.4	0.52	13.3	10,150	70.0	2.80	70	0.27	0.18	8X
2380N-04V02	Blue	6	1/4	6.4	0.52	13.3	10,150	70.0	2.80	70	0.27	0.18	8X
2380N-04V04	Red	6	1/4	6.4	0.52	13.3	10,150	70.0	2.80	70	0.27	0.18	8X
2380N-04V06	Yellow	6	1/4	6.4	0.53	13.4	10,150	70.0	2.80	70	0.18	0.27	8X
2380N-04V66	Yellow	6	1/4	6.4	0.50	13.4	13,200	91.0	2.80	70	0.18	0.27	NX
2380N-04V91	Black	6	1/4	6.4	0.53	13.4	10,000	69.0	2.80	70	0.18	0.27	8X
2380N-05V00	Black	8	5/16	7.9	0.62	15.8	9,060	62.5	3.54	90	0.24	0.35	LX
2380N-16V12	Blue	25	1	25.4	1.45	36.8	5,510	38.0	11.42	290	1.00	1.49	8X
2380N-16V16	Yellow	25	1	25.4	1.45	36.8	5,510	38.0	11.42	290	1.00	1.49	8X

Construction

Core Tube: Polyamide

V71 - Polyamide, Methanol washed

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: V0x — Polyurethane

V1x — Polyurethane

V3x — Polyamide

V91 — Polyamide

V66 — Polyamide

Temperature Range

-40°F to +212°F (-40°C to +100°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Options

Colors: ● Black

● Blue


● Red

● Yellow

2380N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2380N-04V0x		2380N-04V66	2380N-04V91	2380N-05V00	2380N-16V1x
Fitting Part Numbers 	1018X-6-04 1018X-6-04C 1018X-8-04 1018X-4-04C 1C38X-8-04 1D98X-4-04 1D98X-4-04C 1AY8X-6-04 1AY8X-6-04C	1928X-4-04 1928X-4-04C 1068X-4-04 1068X-4-04C 1068X-6-04 1068X-6-04C 1028X-4-04 1028X-4-04C 1MB8X-6-4	601NX-2-4 601NX-4-4 601NX-4-4C 606NX-4-4C 606NX-6-4C 6AYNX-6-4C	1068X-4-04C 1068X-6-04C 1018X-6-04C 1AY8X-6-04C 1928X-4-04C 1018X-4-04C 15Y8X-6-04C	601LX-4-5 601LX-4-5C 601LX-6-5 601LX-6-5C 6AYLX-8-5C 606LX-6-5C 606LX-8-5C	1068X-16-16C-SUBSEA 1378X-16-16C-SUBSEA 1398X-16-16C-SUBSEA 19G8X-16-16C-SUBSEA 19G8X-24-16C-SUBSEA 19M8X-16-16C-SUBSEA 19M8X-24-16C-SUBSEA 19W8X-16-16C-SUBSEA 19W8X-24-16C-SUBSEA

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers				
#	Heavy Duty Abrasion Cover	Cover Sleeves	Spring Guard	Containment Grip	Bend Restrictor
2380N-04V0x	MHDC012	510-A-500-12	MSG2106	MCG001SS MCGHS10-15	MBR010
2380N-04V66	MHDC010	508-J-500-10	N/A	MCG001SS MCGHS10-15	MBR009
2380N-04V91	MHDC012	510-A-500-12	MSG2106	MCG001SS MCGHS10-15	MBR010

2388N - High Pressure Hose



Features and Applications

- Up to 35% lighter weight for a 20 meter hose assembly when compared to rubber hose
- High kink resistance
- Waterblast hoses are compliant with DIN EN 1829-2
- Hoses indicated for waterblast applications intended for construction, ship building and general industrial cleaning applications
- Particularly well-suited for the removal of dirt, rust and paint from the surface of ship decks, tanks, concrete and asphalt
- Grease injection hose
- High flexibility for hydraulic tools, rescue equipment, straightening benches and clamps



Markets

- Waterblast

Certifications

- DIN EN1829-2 compliant

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2388N-04V13W	Green	6	1/4	6.4	0.53	13.4	18,560	128.0	3.15	80	0.20	0.30	KY
2388N-08V13W	Green	12	1/2	12.7	0.91	23.1	15,950	110.0	4.72	120	0.54	0.80	BS



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2388N-04V14	Red	6	1/4	6.4	0.52	13.3	11,600	80.0	3.15	80	0.20	0.30	8X

Construction

Core Tube: Polyamide

Reinforcement: Two spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Green
● Red

Temperature Range

Waterblast hoses: 14°F to +158°F (-10°C to +70°C)

Hydraulic hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2388N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2388N-04V1xW	2388N-08V1xW	2388N-04V14
Fitting Part Numbers 	101KY-2-04 101KY-4-04 101KY-6-04 15YKY-6-04 1AYKY-6-04	1AYBS-11-08 1AYBS-11-08C 101BS-8-08 101BS-8-08C 1C9BS-16-08	1018X-4-04 1068X-4-04 1068X-6-04 1018X-6-04C 15Y8X-6-04C 1928X-4-04 1AY8X-6-04 1C38X-8-04 1D98X-4-04 1MB8X-6-04

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers		
#	Heavy Duty Abrasion Cover	Cover Sleeves	Hose Stop
2388N-04V1xW	MHDC012	510-A-500-12	NA
2388N-08V1xW	MHDC018	216-200-18	AH-08S
2388N-04V14	MHDC012	510-A-500-12	NA

2390N - High Pressure Hose

Features and Applications

- Low dimensional change under pressure resulting in excellent response times
- Smooth bore for low pressure drop
- Meets or exceeds the performance requirements of ISO 13628-5
- Low volumetric expansion hose
- Used for subsea hydraulic controls — long-length hot line hoses and stack control lines for BOP systems
- Portable hydraulic tools



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2390N-04V00	Black	6	1/4	6.4	0.52	13.3	7,107	49.0	2.76	70	0.17	0.25	8X/9X/E2/E3
2390N-04V12	Blue	6	1/4	6.4	0.52	13.3	7,107	49.0	2.76	70	0.17	0.25	8X/9X/E2/E3
2390N-04V16	Yellow	6	1/4	6.4	0.52	13.3	7,107	49.0	2.76	70	0.17	0.25	8X/9X/E2/E3
2390N-06V13	Green	10	3/8	9.5	0.71	18.1	6,450	44.5	4.72	120	0.28	0.41	9X
2390N-08V12	Blue	12	1/2	12.7	0.83	21.2	6,017	41.5	5.91	150	0.36	0.54	9X/E2/E3
2390N-08V13	Green	12	1/2	12.7	0.83	21.2	6,017	41.5	5.91	150	0.36	0.54	9X/E2/E3
2390N-08V16	Yellow	12	1/2	12.7	0.83	21.2	6,017	41.5	5.91	150	0.36	0.54	9X/E2/E3
2390N-16V12	Blue	25	1	25.4	1.38	35.0	4,060	28.0	11.02	280	0.79	1.17	9X/E2/E3
2390N-16V13	Green	25	1	25.4	1.38	35.0	4,060	28.0	11.02	280	0.79	1.17	9X/E2/E3
2390N-16V16	Yellow	25	1	25.4	1.38	35.0	4,060	28.0	11.02	280	0.79	1.17	9X/E2/E3

Construction

Core Tube: Polyamide

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: V1x - Seawater-resistant Polyurethane

V00 - Polyurethane

V91 - PA 12

Options

Colors: ● Blue
● Yellow
● Green

Temperature Range

-40°F to +212°F (-40°C to +100°C)

V91 hose: max. of +158°F (+70°C) when used with water/glycol and methanol-based fluids


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2390N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2390N-04Vxx	2390N-06V13	2390N-08V1x	2390N-16V1x
Fitting Part Numbers 	1018X-6-4 1D98X-4-4 E206JCC3 E206JEC3 6019X-4-4C 6069X-4-4C 6069X-6-4C 6AY9X-6-4C 139E3-4-4C 139E3-6-4C 137E3-4-4C 137E3-6-4C 106E3-4-4C 106E3-6-4C	6019X-6-6 6019X-6-6C 6019X-8-6 6019X-8-6C 6069X-6-6C-SUBSEA 6069X-8-6C 6AY9X-8-6C	6019X-8-8 6019X-8-8C 6069X-8-8C 6AY9X-11-8C E213JFC4 19WE3-8-8C 19WE3-16-8C 19ME3-8-8C 19ME3-16-8C 19GE3-8-8C 19GE3-16-8C 106E3-8-8C 139E3-8-8C-411 137E3-8-8C-411	6019X-16-16C 6069X-16-16C 6AY9X-16-16C E225JIC3 19WE3-16-16C 19WE3-24-16C 19ME3-16-16C 19ME3-24-16C 19GE3-16-16C 19GE3-24-16C 139E3-16-16C-411 137E3-16-16C-411 106E3-16-16C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers		
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip
2390N-04Vxx	MHDC010	508-J-500-10	MCG001SS
2390N-08V1x	MHDC016	216-200-18	MCG005SS MCGHS20-30
2390N-12V03	NA	220-200-22	MCG002SS MCG005SS MCGHS20-30
2390N-16V1x	MHDC024	220-200-22	MCG003SS MCGHS30-40

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



2440D/2448D - Ultra High Pressure Water Jetting Hose



Features and Applications

- DIN EN1829-2 compliant
- High pressure service for tube cleaning applications such as heat exchangers in the chemical and oil refining industries
- Application as flexible lance
- Ultra-high pressure service for the construction and shipbuilding industries and for general purpose industrial cleaning applications
- Hydrodemolition and removal of accumulated dirt and material from surfaces such as concrete, asphalt and tanks



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2440D-02V37	Gray	3	1/8	3.2	0.31	7.9	30,000	207.0	3.94	100	0.08	0.12	LX
2440D-025V37	Gray	4	5/32	4.0	0.41	10.5	31,900	220.0	3.94	100	0.14	0.21	LX
2440D-03V32	Blue	5	3/16	4.8	0.45	11.5	26,100	180.0	5.12	130	0.19	0.28	LX
2440D-04V32	Blue	6	1/4	6.4	0.49	12.5	23,780	164.0	6.10	155	0.22	0.33	LX
2440D-05V32	Blue	8	5/16	7.9	0.59	15.1	21,750	150.0	6.89	175	0.30	0.44	LX
2448D-025V35	Orange	4	5/32	4.0	0.39	9.9	43,645	301.0	4.72	120	0.15	0.22	LX

Construction

Core Tube: Polyoxymethylene

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Blue
● Gray
● Orange

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440D/2448D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2440D-02V3x	2440D-025V37	2440D-03V32		2440D-04V32
Fitting Part Numbers 	1AYLX-6-02 1HYLX-4-02 1HYLX-4-02-LH 1Y4LX-4-02 1YHLX-4-02 1YHLX-4-02-LH 6YHLX-4-02-PL 6AYLX-6-02	601LX-2-2AC 6AYLX-6-2AC 6HYLX-4-2AC-PL 6HYLX-4-2AC-PL-LH 6Y4LX-4-2AC 6Y4LX-6-2AC 6YHLX-4-2AC-PL 6YHLX-4-2AC-PL-LH	601LX-4-3 65YLX-6-3 65YLX-6-3C 66YLX-4-3 66YLX-4-3C 692LX-4-3C 6AYLX-6-3 6AYLX-6-3C 6HYLX-4-3C-PL 6HYLX-4-3C-PL-LH	6HYLX-6-3C-PL 6HYLX-6-3C-PL-LH 6Y4LX-6-3C 6Y4LX-9-3C 6YHLX-4-3C-PL 6YHLX-4-3C-PL-LH 6YHLX-6-3C-PL 6YHLX-6-3C-PL-LH	101LX-4-04 101LX-6-04 1AYLX-6-04 1Y2LX-6-04
2440D-05V32		2448D-025V3x			
601LX-4-5 601LX-4-5C 601LX-6-5 601LX-6-5C 692LX-6-5C 6AYLX-8-5C	6HYLX-9-5C-PL-LH 6Y2LX-12-5C 6Y2LX-9-5C 6YHLX-9-5C-PL 6YHLX-9-5C-PL-LH 6Y2HX-9-5C-LONG 6Y2HX-9-5C-THD	6HYLX-4-2AC-PL 6HYLX-4-2AC-PL-LH 6YHLX-4-2AC-PL 6YHLX-4-2AC-PL-LH			

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers
#	Hose Stop
2448D-025V35 2440D-025V37	AH-04S
2440D-03V32 2440D-04V32	AH-05S
2440D-05V32	AH-06S

For detailed ordering information, please consult price list or contact Parflex Division.

2440N - Ultra High Pressure Waterblast Hose

Features and Applications



- DIN EN1829-2 compliant
- High pressure, low volumetric expansion hose
- Flexible, chemical-resistant, lightweight alternative to steel pipe and rubber hose
- Ultra high pressure service for the construction and shipbuilding industries and general industrial cleaning applications
- Mainly used in hydrodemolition and to remove different kinds of dirt accumulation, or materials from various surfaces
- Waterjet technology, delivery hose



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2440N-04V32	Blue	6	1/4	6.4	0.51	13.0	20,300	140.0	6.10	155	0.21	0.31	LX
2440N-06V32	Blue	10	3/8	9.5	0.77	19.5	20,300	140.0	7.48	190	0.49	0.73	LX
2440N-08V32	Blue	12	1/2	12.7	0.89	22.7	20,300	140.0	7.87	200	0.63	0.94	LX
2440N-12V36	Yellow	20	3/4	19.0	1.19	30.2	14,500	100.0	9.84	250	0.98	1.46	LX
2440N-16V36	Yellow	25	1	25.4	1.46	37.2	13,050	90.0	11.81	300	1.34	2.00	LX

Construction

Core Tube: Polyamide

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Blue

● Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2440N-04V32	2440N-06V32	2440N-08V3x	2440N-12V3x	2440N-16V3x
Fitting Part Numbers 	6AYLX-6-4 6AYLX-6-4C 6AYLX-6-4C-SD 601LX-4-4 601LX-4-4C 65YLX-6-4 65YLX-6-4C 65YLX-6-4 65YLX-6-4C	692LX-4-4 6YHLX-6-4C 6YHLX-6-4C-LH 6HYLX-6-4C-PL 6HYLX-6-4C-PL-LH 6YHLX-6-4C-PL 6YHLX-6-4C-PL-LH	6AYLX-8-6C 6Y2LX-9-6C 1YHLX-9-06SC	601LX-8-8 601LX-8-8C 6AYLX-11-8C 6C9LX-16-8C 6Y2LX-12-8C 6Y2LX-9-8C	601LX-12-12C 601LX-16-12C 606LX-16-12C 6AYLX-16-12C 6C9LX-25-12C 6Y2LX-16-12C
					601LX-16-16C 606LX-16-16C 6AYLX-16-16C 6C9LX-30-16C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers			
#	Heavy Duty Abrasion Cover	Cover Sleeves	Spring Guard	Containment Grip
2440N-04V32	MHDC012	510-A-500-12	NA	NA
2440N-06V32	MHDC016	412-400	NA	NA
2440N-08V3x	MHDC018	216-200-18	MSG4113	MCGHS20-30
2440N-12V3x	MHDC024	220-200-22	MSG4120	MCG002SS MCGHS30-40
2440N-16V3x	MHDC026	520-A-500-26	MSG4125	MCG003SS MCGHS30-40

For detailed ordering information, please consult price list or contact Parflex Division.

2440N/2448N - Ultra High Pressure Hose

Features and Applications

- Compliant with ISO 13628-5
- High pressure, low volumetric expansion hose
- Flexible, chemical-resistant, lightweight alternative to steel pipe and rubber hose
- V91 hoses are used in offshore applications such as, control fluids, acidizing, methanol injection and well stimulation



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2440N-04V91	Black	6	1/4	6.4	0.52	13.1	12,500	87.5	5.90	150	0.21	0.31	LX
2440N-06V91	Black	10	3/8	9.5	0.77	19.5	12,688	87.5	7.48	190	0.49	0.73	LX
2440N-08V91	Black	12	1/2	12.7	0.89	22.7	11,745	81.0	7.87	200	0.63	0.94	LX
2440N-12V91	Black	20	3/4	19.0	1.19	30.2	10,000	69.0	9.84	250	0.98	1.46	LX
2440N-16V91	Black	25	1	25.4	1.46	37.2	8,120	56.0	11.81	300	1.34	2.00	LX
2440N-16V91-10K	Black	25	1	25.4	1.47	37.2	10,000	69.0	11.81	300	1.34	2.00	LX
2448N-04V91	Black	6	1/4	6.4	0.54	13.7	15,000	103.5	5.90	150	0.26	0.38	8X

Construction

Core Tube: Methanol-washed PA11

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Nylon 12

Options

Colors: ● Black

Temperature Range

-40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440N/2448N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2440N-04V91	2440N-06V91	2440N-08V91	2440N-12V91
Fitting Part Numbers 	1AYLX-6-04C 101LX-4-04C 106LX-6-04C 15YLX-9-04C 6AYLX-6-4C 65YLX-6-4C 601LX-4-4C 6AYLX-6-4C-SD	1AYLX-8-06C4462 106LX-8-06C4462 106LX-6-06C4462 1Y2LX-9-06C4462 1Y2LX-6-06C4462	106LX-8-08C 101LX-8-08C 1AYLX-11-08C 1AYLX-11-08C4462 1C9LX-16-08C 1Y2LX-12-08C 606LX-8-8C	601LX-12-12C 601LX-16-12C 606LX-16-12C 6AYLX-16-12C 6C9LX-25-12C 6Y2LX-16-12C 6AYLX-16-12C-SD
2440N-04V3x	2440N-16V91	2440N-16...10K	2448N-04V91	
1AYLX-6-04C 101LX-4-04C 15YLX-9-04C	601LX-16-16C 606LX-16-16C 6AYLX-16-16C 6AYLX-16-16C-SD 6AYLX-16-16-HCL 6C9LX-30-16C 6HELX-16-16-HCL 6HNLX-16-16-HCL	1062X-16-16C4462 1HNLX-32-16C4462 1Y2LX-16-16C4462	1018X-4-04C 1018X-6-04C 1068X-4-04C 1068X-6-04C 1928X-4-04C 1AY8X-6-04C 1Y28X-6-04C 1Y28X-9-04C	

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers			
#	Heavy Duty Abrasion Cover	Cover Sleeves	Spring Guard	Containment Grip
2440N-04Vxx	MHDC010	508-J-500-10	N/A	MCG001SS MCGHS10-15
2440N-06V91	MHDC016	216-200-18	N/A	MCGHS15-20
2440N-08V91	MHDC018	216-200-18	N/A	MCGHS20-30
2440N-12V91	MHDC024	220-200-22	MSG4120	MCG002SS MCGHS30-40
2440N-16V91	MHDC026	520-A-500-26	MSG4125	MCG003SS MCGHS30-40

For detailed ordering information, please consult price list or contact Parflex Division.

2580N - Ultra High Pressure Waterblast Hose



Features and Applications

- DIN EN1829-2 compliant
- MSHA hose meets requirements of MDG 41
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- Mainly used in hydrodemolition and to remove different kinds of dirt accumulation, or materials from various surfaces, such as those in tanks, from concrete, asphalt, etc.
- MSHA - Maximum pressure service for use with petroleum or synthetic hydraulic fluids



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2580N-06V12	Blue	10	3/8	9.5	0.85	21.6	23,200	160.0	3.74	95	0.63	0.94	BL
2580N-08V12	Blue	12	1/2	12.7	0.99	25.2	20,300	140.0	5.91	150	1.19	0.80	BL
2580N-12V13	Green	20	3/4	19.0	1.29	32.8	17,400	120.0	6.69	170	1.18	1.76	BL



Markets

- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2580N-08V10-MSHA	Black	12	1/2	12.7	0.99	25.2	10,150	70.0	4.33	110	0.80	1.19	BL

Construction

Core Tube: Polyamide

Reinforcement: Four spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Blue

● Red

● Green

● Black

Temperature Range

Waterblast hoses: +14°F to +158°F (-10°C to +70°C)

MSHA hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2580N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2580N-06V12	2580N-08V12	2580N-12V1x	2580N-08V10-MSHA
Fitting Part Numbers 	101BL-6-06 1AYBL-11-06 1AYBL-8-06 1C9BL-14-06 1C9BL-16-06	1AYBL-11-08 1AYBL-11-08C 1C9BL-14-08 1C9BL-16-08 1C9BL-25-08 101BL-8-08 101BL-8-08C	101BL-12-12 1C9BL-25-12	101BL-8-08 101BL-8-08C 1AYBL-11-08 1AYBL-11-08C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers
#	Hose Stop
2580N-08V12	AH-08S
2580N-12V13	AH-12S

2640D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- Hydrodemolition



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2640D-025V35	Orange	4	5/32	4.0	0.47	12.0	40,600	280.0	5.51	140	0.20	0.29	2X
2640D-03V37	Gray	5	3/16	4.8	0.51	12.9	36,230	250.0	6.89	175	0.28	0.41	2X
2640D-05V37	Gray	8	5/16	7.9	0.67	17.0	30,450	210.0	8.86	225	0.46	0.68	2X

Construction

Core Tube: Polyoxymethylene

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Orange

● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2640D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2640D-025V3x	2640D-03V3x	2640D-05V37
Fitting Part Numbers 	16Y2X-4-025 1AY2X-6-025 1Y42X-4-025 1Y42X-6-025	16Y2X-4-03 1922X-4-03 1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03	1AY2X-13-05 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers			
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip	Hose Stop
2640D-025V3x	MHDC010	508-J-500-10	MCGHS10-15	NA
2640D-03V3x	MHDC012	510-A-500-12	MCG001SS MCGHS10-15	AH-05S
2640D-05V37	NA	NA	NA	AH-06S

2640N/2648N - Ultra High Pressure Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- V91 hoses are used in offshore applications such as, control fluids, acidizing, methanol injection and well stimulation
- V91 hose tested according to ISO 13628-5



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2640N-08V32	Blue	12	1/2	12.7	0.96	24.5	26,100	180.0	11.42	290	0.92	1.37	5X
2640N-12V32	Blue	20	3/4	19.0	1.30	33.0	20,300	140.0	13.78	350	1.45	2.16	5X
2648N-16V32	Blue	25	1	25.4	1.61	40.8	21,750	150.0	15.75	400	2.08	3.10	CX



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2640N-12V91	Black	20	3/4	19.0	1.31	33.2	12,500	87.5	13.78	350	1.45	2.16	5X

Construction

Core Tube: Polyamide

V91 - Methanol-washed PA11

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: V32 - Polyamide

V91 - Plasticized Nylon 12

Options

Colors: ● Blue
● Black

Temperature Range

Waterblast hoses: -40°F to +212°F (-40°C to +100°C),
+14°F to +158°F (-10°C to +70°C) for water

O&G hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2640N - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2640N-08V32	2640N-12V32	2640N-12V91	2648N-16V32
Fitting Part Numbers 	6AY5X-11-8C 6C95X-16-8C 6Y25X-12-8C 6Y25X-9-8C	6AY5X-16-12C 6AY5X-16-12C-SD 6C95X-25-12C 6Y25X-16-12C	6015X-12-12C 6AY5X-16-12C 6AY5X-16-12C-SD 6C95X-25-12C 6Y25X-16-12C	1C9CX-30-16W 1AYCX-16-16W

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers		
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip
2640N-08V32	MHDC018	416-400-16	MCGHS20-30
2640N-12V32	MHDC024	220-200-22	MCGHS30-40
2640N-12V71	MHDC024	220-200-22	MCGHS30-40
2648N-16V32	MHDC032	532-500	

2740D- Ultra High Pressure Waterblast Hose



Features and Applications

- DIN EN1829-2 compliant
- Small diameter, flexible hoses
- Ideal for tight routing applications
- Replaces high pressure steel tubing where flexibility and long lengths are important to minimize leak points
- Ultra high pressure waterblast lances for the construction and shipbuilding industries, common industrial cleaning applications, and high pressure tube cleaning in petrochemical and power plants
- Hydrodemolition
- Compression forming process (hydroforming) as a manufacturing procedure for truck and automotive industries
- Water Jet Cutting



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2740D-025V35	Orange	4	5/32	4.0	0.47	12.0	43,500	300.0	4.72	120	0.27	0.41	2X
2740D-03V35	Orange	5	3/16	4.8	0.52	13.3	40,600	280.0	7.87	200	0.32	0.47	2X
2740D-05V37	Gray	8	5/16	7.9	0.68	17.3	36,230	250.0	7.87	200	0.54	0.80	2X / HX

Construction

Core Tube: Polyoxymethylene

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Orange

● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2740D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2740D-025V3x	2740D-03V3x	2740D-05V3x
Fitting Part Numbers 	1AY2X-6-025 1Y42X-4-025 1Y42X-6-025 16Y2X-4-025	16Y2X-4-03 1922X-4-03 1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03	1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 1Y42X-9-05-XLT

Accessories

Technical details available in Section E.

Hose Part #	Accessory Part Numbers						
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip	Bend Stiffener	Pressure Containment Shield and Sleeves		Hose Stop
2740D-025V3x	MHDC010	508-J-500-10	MCGHS10-15	N/A	N/A	N/A	AH-05S
2740D-03V3x	MHDC012	510-A-500-12	MCG001SS MCGHS10-15	M55STIF4 M55STIF6	MHBS012	412-400	AH-05S
2740D-05V3x	MHDC016	216-200-18	MCG001SS MCGHS15-20	N/A	MHBS016	416-400-16	AH-07S

For detailed ordering information, please consult price list or contact Parflex Division.

2741D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- For very high pressure applications with working pressures up to 36,230 psi for the construction and shipbuilding industries.
- Dual outer cover for increased hose protection and easy identification of cover damage



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2741D-05V34/17	Gray	8	5/16	7.9	0.84	21.2	36,230	250.0	7.87	200	0.64	0.95	2X

Construction

Core Tube: Polyoxymethylene

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: Polyamide inner cover / Polyurethane outer cover

Options

Colors: ● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2741D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2741D-05V34/17
Fitting Part Numbers 	1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05

Accessories

Technical details available in Section E.

2840D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant except 2840D-03
- Ultra high pressure waterblast hose
- Compression forming process (hydroforming)
- Water Jet Cutting



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2840D-03V34	Red	5	3/16	4.8	0.59	15.0	58,000	400.0	7.87	200	0.43	0.63	2X
2840D-05V35	Orange	8	5/16	7.9	0.77	19.6	43,500	300.0	9.84	250	0.72	1.07	2X
2840D-08V37	Gray	12	1/2	12.7	1.77	29.9	36,250	250.0	13.78	350	1.68	2.50	WX

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Red
● Orange
● Gray

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2840D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2840D-03V34	2840D-05V3x	2840D-08V3x
Fitting Part Numbers 	1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03	1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05	6Y4WX-16-8C

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers							
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip	Bend Restrictor	Bend Stiffener	Pressure Containment Shield and Sleeves		Hose Stop
2840D-03V34	MHDC016	216-200-18	MCGHS10-15	MBR013-B	M55STIF4 M55STIF6	MHBS012	412-400	AH-06S
2840D-05V3x	MHDC016	216-200-18	MCGHS15-20	N/A	N/A	MHBS016	416-400-16	AH-07S

For detailed ordering information, please consult price list or contact Parflex Division.

2841D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra high pressure hose with working pressures up to 43,500 psi for the construction and shipbuilding industries



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2841D-05V34/15	Orange	8	5/16	7.9	0.93	23.5	43,500	300.0	9.84	250	0.83	1.23	2X

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide inner cover / Polyurethane outer cover

Options

Colors: ● Orange

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2841D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2841D-05V34/15
Fitting Part Numbers 	1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05

Accessories

Part	Overall Length		R Diameter	
#			Ø	
	inch	mm	inch	mm
KL-2841	1.181	30	1.1	28

NOTE: KL-2841 cover sleeve is a requirement on 2841D-05V3x/1x dual jacket hose for each fitting on every hose assembly

2849D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra-high pressure service for water jet cutting equipment with water only or with abrasive additives
- Replaces steel pipe where flexibility is important
- Compression forming (hydroforming)



Markets

- Waterblast

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2849D-05V34	Red	8	5/16	7.9	0.77	19.6	55,000	380.0	11.02	280	0.79	1.17	WX

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Red

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2849D - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2849D-05V34
Fitting Part Numbers 	6YMWX-6-5C-55 6Y4WX-9-5C-55 6AYWX-10-5C-55

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers							
#	Heavy Duty Abrasion Cover	Cover Sleeves	Containment Grip	Bend Restrictor	Bend Stiffener	Pressure Containment Shield and Sleeves		Hose Stop
2849D-05V3X	MHDC016	2016-200-18	MCGHS15-20	N/A	N/A	MHBS016	416-400-16	AH-07S

For detailed ordering information, please consult price list or contact Parflex Division.

57CR “Sea Wolf”- High Collapse Resistant Hose



Features and Applications

- Ultra-high abrasion resistant
- Suitable for marine (salt water) environment
- ISO 13628-5 “Specification for Subsea Production Control Umbilicals”, Section 7.9 Hose construction
- Smooth bore for improved flow rate and low pressure drop
- Ideal solution for subsea hydraulic lines that are not under constant system pressure.
- Hose is not recommended for high pressure pneumatic service applications



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
57CR-8-BLU	Blue	12	1/2	12.7	1.18	30.0	5,000	34.5	6.25	159	0.63	0.94	CR
57CR-8-YEL	Yellow	12	1/2	12.7	1.18	30.0	5,000	34.5	6.25	159	0.63	0.94	CR
57CR-16-BLU	Blue	25	1	25.4	2.00	50.8	5,000	34.5	10.75	273	1.46	2.17	CR
57CR-16-YEL	Yellow	25	1	25.4	2.00	50.8	5,000	34.5	10.75	273	1.46	2.17	CR

Construction

Core Tube: Polyamide with stainless steel helix support

Reinforcement: High tensile strength aramid fiber

Cover: Polyurethane

Options

Colors: ● Blue
● Yellow

Temperature Range

-40°F to +140°F (-40°C to +60°C) for petroleum, synthetic hydraulic oils, waer and water-based hydraulic fluid


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

57CR “Sea Wolf” - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	57CR-8-BLU	57CR-8-YEL	57CR-16-BLU	57CR-16-YEL
Fitting Part Numbers 	606CR-8-8C	606CR-8-8C	606CR-16-16C	606CR-16-16C

Accessories

Technical details available in Section E.

HP - High Pressure Hose

HP8 - High Pressure Non-Conductive Hose



Features and Applications

- Meets or exceeds SAE J517 for less than 50 microamps leakage under 75000 volts per foot
- Specially formulated thermoplastic elastomer core tube
- For use in high pressure hydraulic and pneumatic applications and can be used with lubricating oils
- Not recommended for water blast applications or for use in static discharge applications (i.e., airless paint spray)
- Non-conductive version (HP8) used in aerial lift equipment.
- High pressure tools
- Rigging jacks
- Test apparatus
- Oilfield pressure control devices
- Offshore oil applications



Markets

- Oil & Gas
- Hydraulic

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
HP-3	Blue	5	3/16	4.8	0.51	13.0	10,000	69.0	1.50	38	0.09	0.13	HP*
HP-4	Blue	6	1/4	6.4	0.58	14.7	10,000	69.0	2.50	64	0.11	0.16	HP*
HP-6	Blue	10	3/8	9.5	0.73	18.5	8,000	55.2	3.00	76	0.16	0.23	HP*
HP8-3	Orange	5	3/16	4.8	0.51	13.0	10,000	69.0	1.50	38	0.09	0.13	HP*
HP8-4	Orange	6	1/4	6.4	0.58	14.7	10,000	69.0	2.50	64	0.11	0.16	HP*
HP8-6	Orange	10	3/8	9.5	0.73	18.5	8,000	55.2	3.00	76	0.16	0.23	HP*

Construction

Core Tube: Specially formulated thermoplastic elastomer

Reinforcement: High tensile strength aramid fiber

Cover: HP- perforated elastomeric cover

HP8- non-perforated elastomeric cover

Options

Colors: ● Blue

● Orange

Temperature Range

-40°F to +150°F (-40°C to +66°C) for petroleum, synthetic or water-based hydraulic fluids, pneumatic and gas service, and with some solvents and chemicals

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


The above hoses are not intended for use in static discharge applications (i.e., airless paint spray).

*For Parkrimp crimpers, refer to the crimp instructions in CAT 4460.

HP / HP8 - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	HP-3	HP-4	HP-6	HP8-3	HP8-4	HP8-6
Fitting Part Numbers 	101HP-2-3 101HP-4-3 101HP-6-3 106HP-4-3	101HP-2-4 101HP-4-4 101HP-6-4 106HP-4-4 106HP-4-4C 106HP-6-4	101HP-4-6 101HP-6-6 101HP-8-6 106HP-8-6C 106HP-6-6 106HP-6-6C	101HP-2-3 101HP-4-3 101HP-6-3 106HP-4-3	101HP-2-4 101HP-4-3 101HP-4-4 101HP-6-4 101HP-6-4C 106HP-4-4 106HP-6-4	101HP-4-6 101HP-6-6 101HP-8-6 106HP-6-6

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers
#	High Pressure Guard Kit
HP-3	HPG3-12K HPG3-23K
HP-4	HPG4-12K HPG4-23K
HP-6	HPG6-12K HPG6-23K
HP8-3	HPG3-12K-ORG HPG3-23K-ORG
HP8-4	HPG4-12K-ORG HPG4-23K-ORG
HP8-6	HPG6-12K-ORG HPG6-23K-ORG

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle- 1-1/2" Oilfield Service Hose



Features and Applications

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2640N-24V80	Black	40	1-1/2	38.1	2.78	70.5	10,000	69.0	19.69	500	4.84	7.20	5X
2640N-24V80-15K	Black	40	1-1/2	38.1	2.60	66.0	15,000	103.5	19.69	500	4.37	6.50	5X

Construction

Core Tube: Polyamide 11, methanol washed
 Reinforcement: 6 layers of high tensile steel wire
 Cover: Extra thick dual layer polyurethane

Options

Colors: ● Black w/ ColorGard™ red inner sheath

Temperature Range

-40°F to +158°F (-40°C to +70°C),
 15K hose can be used intermittently at +212°F (+100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2640N-24V80	2640N-24V80-15K
Fitting Part Numbers 	6015X-32-24-TC 6HE5X-32-24-FLATTC 6HE5X-32-24-SEGTC 6HN5X-32-24-TC	1HN5X-32-24C4462-KOP2 1HE5X-32-24C4462-KOP2

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers	
#	Containment Grip	Heat Shrink
2640N-24V80	MCGHS3295-SS	HDT4500-48A
2640N-24V80-15K	N/A	N/A

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



Black Eagle- 2" Oilfield Service Hose



Features

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- *DNV Type Approval P 14038 acc. to API 7K and API 17J with BL Fittings
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2448N-32V80*	Black	50	2	50.8	3.17	80.5	5,000	34.5	20	508	5.71	8.50	5X
2580N-32V80*	Black	50	2	50.8	3.33	84.5	10,000	69.0	32	813	6.32	9.40	5X
2648N-32V80	Black	50	2	50.8	3.39	86.0	15,000	103.5	31	787	8.13	12.10	CX

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2448N - 4 spiral layers of high tensile steel wire

2580N - 4 spiral layers and 2 open spiral layers high tensile steel wire

2648N - 6 spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Temperature Range

-40°F to +158°F (-40°C to +70°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


Options

Colors: ● Black w/ ColorGard™ red inner sheath

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2448N-32V80	2580N-32V80	2648N-32V80
 Fitting Part Numbers 6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC		*6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC *6HB5X-32-32-TC-FLG *6HB5X-32-32-TC 6HB5X-32-32-TC-FLG-10K 6HB5X-32-32-TC-10K *6HB5X-41-32-TC *6HB5X-41-32-TC-FLG	1HECX-32-32-FLAT 1HNCX-32-32

*Working pressures of these hose assemblies is 5,000 psi

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers	
#	Containment Grip	Heat Shrink
2448N-32V80	MCGHS3295-SS	HDT4500-48A
2580N-32V80	MCGHS3295-SS	HDT4500-48A
2648N-32V80	N/A	N/A

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



A-60

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Black Eagle- 3" Oilfield Service Hose



Features

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- DNV Type Approval P 14038 acc. to API 7K and API 17J
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2240N-48V80	Black	78	3	76.0	4.49	114.0	5,000	34.5	39.93	1000	7.73	11.50	TX
2440N-48V80	Black	78	3	76.0	4.80	122.0	10,000	69.0	43.31	1100	12.57	18.70	LX
2640N-48V80	Black	78	3	76.0	4.49	130.5	15,000	103.5	47.30	1200	18.48	27.50	5X

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2240N - 2 spiral layers of high tensile steel wire

2440N - 4 spiral layers high tensile steel wire

2640N - 6 spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Options

Colors: ● Black w/ ColorGard™ red inner sheath

Temperature Range

-40°F to +158°F (-40°C to +70°C), 2240N and 2440N can be used intermittently at +212°F (+100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2240N-48V80	2440N-48V80	2640N-48V80
Fitting Part Numbers 	1HETX-48-48 1HETX-48-48-FLAT 1HNTX-48-48	1HELX-48-48 1HELX-48-48-FLAT 1HNLX-48-48	1HE5X-48-48 1HE5X-48-48-FLAT 1HN5X-48-48

Accessories

Technical details available in Section E.

Black Eagle Light- Cementing Hose



Features

- Abrasive applications, such as cementing
- Significantly higher abrasion resistance than common elastomer materials — longer service life and less contamination in cement slurry
- Easy visualization of core tube erosion— more efficient product inspection and reduced unscheduled downtime
- Lighter weight and smaller O.D. than common 4-layer constructions — faster and easier deployment



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2240N-32V10	Black	50	2	50.8	2.70	68.5	3,000	20.7	19.69	500	2.96	4.40	S6*
2248N-32V10	Black	50	2	50.8	2.70	68.5	5,000	34.5	19.69	500	2.96	4.40	S6*

Construction

Core Tube: Polyamide 11, two-layer core tube

Reinforcement: Two closed spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Black

Temperature Range

-40°F to +212°F (-40°C to +100°C)

Notes


Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

*Fittings are not for use subsea. For subsea applications, see traditional Black Eagle product series.

Black Eagle Light - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2240N-32V10	2448N-32V10
Fitting Part Numbers 	Offshore*: 1HES6-32-32-FLAT-SC 1HNS6-32-32-SC Onshore: 1HES6-32-32-FLAT 1HNS6-32-32	Offshore*: 1HES6-32-32-FLAT-SC 1HNS6-32-32-SC Onshore: 1HES6-32-32-FLAT 1HNS6-32-32

*Fittings are not for use subsea. For subsea applications, see traditional Black Eagle product series.

Accessories

Technical details available in Section E.

Golden Eagle- Chemical Injection and Acidizing Hose



Features and Applications

- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- Compact design - smaller OD than flexible pipe
- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Water and chemical injection hose
- Acidizing
- Not recommended for gas applications



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
#													
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2640M-24V88	Gold	40	1-1/2	38.1	2.78	70.5	10,000	69.0	19.69	500	4.84	7.20	5X
2448M-32V88	Gold	50	2	50.8	3.17	80.5	5,000	34.5	19.69	500	5.71	8.50	5X
2580M-32V88	Gold	50	2	50.8	3.33	84.5	10,000	69.0	31.50	800	6.32	9.40	5X

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2640M - 6 spiral layers of high tensile steel wire

2448M- 4 spiral layers high tensile steel wire

2580M - 4 spiral layers and two open spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Temperature Range

-40°F to +158°F (-40°C to +70°C);

2640M short term up to +212°F (+100°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


Options

Colors: ● Gold w/ ColorGard™ red inner sheath

Golden Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2640M-24V88	2448M-32V88	2580M-32V88
Fitting Part Numbers 	1HE5X-32-24C4462-FLATTC 1HN5X-32-24C4462-TC	6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC	*6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC

*Working pressures of these hose assemblies is 5,000 psi

Accessories

Technical details available in Section E.

Hose Part	Accessory Part Numbers	
#	Containment Grip	Heat Shrink
2448M-32V88	MCGHS3295-SS	HDT4500-48A

ChemJec- Long-length Umbilical Hose



Features

- Excellent chemical resistance
- Medium pressure, high temperature, low volumetric expansion hose
- Withstands high pressure cycles with no signs of stress cracking
- Meets or exceeds the performance requirements of ISO 13628-5
- Long-length subsea umbilical hose



Markets

- Oil & Gas

Part Number	Jacket Color	Nominal I.D.			Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Weight		Fitting Series
		DN	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	
2440M-04V38	Gold	6	1/4	6.4	0.52	13.1	12,500	87.5	5.90	150	0.21	0.31	8X
2440M-05V38	Gold	8	5/16	7.9	0.64	16.2	10,000	69.0	6.88	175	0.33	0.49	LX
2440M-06V38	Gold	10	3/8	9.5	0.77	19.5	10,000	69.0	7.48	190	0.49	0.73	LX
2440M-08V38	Gold	12	1/2	12.7	0.89	22.7	10,000	69.0	7.87	200	0.63	0.94	LX
2448M-04V38	Gold	6	1/4	6.4	0.54	13.7	15,000	103.4	9.06	230	0.26	0.38	UX
2448M-05V38	Gold	8	5/16	7.9	0.64	16.3	15,000	103.4	9.06	230	0.35	0.52	LX
2448M-06V38	Gold	10	3/8	9.5	0.79	20.1	15,000	103.4	7.87	200	0.56	0.83	UX
2640M-08V38	Gold	12	1/2	12.7	0.97	24.7	15,000	103.4	11.42	290	0.90	1.34	5X

Construction

Core Tube: Proprietary Specification, based on fluoropolymer technology

Reinforcement:

2440M / 2448M - 4 closed spiral layers of high tensile steel wire
2640M - 6 closed spiral layers of high tensile steel wire

Cover: Polyamide 12

Options

Colors: ● Gold

Temperature Range

-40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

ChemJec - Fittings and Accessories

Fittings

Technical details available in Section B.

Hose Part #	2440M-04V38	2440M-05V38	2440M-06V38	2440M-08V38
Fitting Part Numbers 	1018X-4-04C 1018X-6-04C 1028X-4-04C 1068X-4-04C 1068X-6-04C 1AY8X-6-04C	6AYLX-8-5C-M-SUBSEA 106LX-6-05C 1AYLX-8-05C	6AYLX-8-6C-SUBSEA 106LX-6-06C-M-SUBSEA 106LX-8-06C-M-SUBSEA	106LX-8-08C-M-SUBSEA 1Y2LX-12-08C-M-SUBSEA
	2448M-04V38	2448M-05V38	2448M-06V38	2640M-08V38
	101UX-6-04C 1AYUX-6-04C 1Y2UX-6-04C	6AYLX-8-5C-M-SUBSEA	1AYUX-8-06C 106UX-8-06C 1Y2UX-9-06C	1AY5X-11-08C-M-SUBSEA 1Y25X-12-08C-M-SUBSEA 1Y25X-9-08C-M-SUBSEA

Accessories

Technical details available in Section E.

Notes

[illegible]

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Fittings

Permanent / Crimp Fittings

Field Attachable / Reusable

Polyflex-Lok



Table of Contents

Introduction

End Fitting Nomenclature.....	B-2
Fitting Configuration Chart.....	B-3
How to Read the Fittings Section	B-6

Fittings by Series

55 Series.....	B-7
2X Series	B-9
3X Series	B-11
5X Series	B-12
8X Series	B-14
9X Series	B-19
AX Series	B-21
BL Series	B-24
BS Series	B-26
CR Series	B-28
E2 Series	B-29
E3 Series	B-30
EX Series	B-33
HP Series.....	B-34
HX Series.....	B-35
KY Series.....	B-36
LX Series	B-38
NX Series.....	B-48
PL Series	B-51
RX Series.....	B-52
TX Series	B-54
UX Series.....	B-56
WX Series	B-57
Black Eagle Fittings.....	B-58

Polyflex-Lok

Polyflex-Lok Components.....	B-63
------------------------------	------

Fitting Part Number Nomenclature



6Y4LX-9-3C

6

Y4

1. Design Type

1 = German-designed end fitting
6 = US-designed end fitting
2 = Reusable style end fittings

2. Connection Type

01 = NPT - Male	D9 = BSP Rigid - Male
02 = NPT - Female	G2 = BSP Swivel 90° Elbow - Female
06 = JIC 37° Flare - Female	92 / BC = BSP Swivel - Female
5Y = Medium Pressure Swivel - Female	07 = NPS Swivel - Female
Y2 = Medium Pressure - Male	EZ = Waterblast Nozzle - Female
6Y = High Pressure Swivel - Female	ZE = Waterblast Nozzle - Male
Y4 = High Pressure - Male	HY = Waterblast Nozzle - Female
RX = Reusable	YH = Waterblast Nozzle - Male
AY = Type "M" Swivel - Female	3Z = Waterblast Nozzle - Male
YA = Type "M" Swivel - Male	HE = 2" Hammer Union, Cone w/ Wing Nut - Male
MB = STECKO	HN = 2" Hammer Union, Cone Threaded End w/ Seal- Female
C3 / C9 = METRIC Swivel - Female	TU = Tube Stub Fitting

LX

9

3

C

3. Hose Series Designation

2X = 2840D, 2740D and 2640D Series Hoses
3X = 2022N Series Hoses
5X = All 2640 Series Hoses
8X = All 2244 and 2380 Series Hoses
9X = All 2300 Series Hoses
AX = 2240D-025V34
BL = 2580N Series Hoses
BS = 2388N Series Hoses
CR = 57CR Series Hoses
E2 = 2390N Series Hoses
E3 = 2390N Series Hoses
EX = 2020N Series Hoses
HP = HP/HP8 Series Hoses
HX = All 2740 Series Hoses
KY = 2380N Series Hoses
LX = All 2440 Series Hoses
NX = 2240D-04, 2300 Series Hoses
PL = 2240D Series Hoses
RX = 2020N-02V30 (Reusable Fittings)
TX = 2240D/2248D Series Hoses
UX = 2448M Series Hoses
WX = All 2840 Series Hoses

4. Connection Size

JIC / Type M

1 = 1/4" - 28 UNF
2 = 5/16" - 24 UNF
3 = 3/8" - 24 UNF
4 = 7/16" - 20 UNF
5 = 1/2" - 20 UNF
6 = 9/16" - 18 UNF
7 = 5/8" - 18 UNF
8 = 3/4" - 16 UNF
10 = 7/8" - 14 UNF
11 = 1" - 12 UNF
12 = 1-1/16" - 12 UNF
13 = 1-1/8" - 12 UNF
15 = 1-1/4" - 12 UNF
16 = 1-5/16" - 12 UNF
17 = 1-3/8" - 12 UNF
19 = 1-1/2" - 12 UNF
20 = 1-5/8" - 12 UNF

BSP

2 = G 1/8"
4 = G 1/4"
6 = G 3/8"
8 = G 1/2"

NPT

1 = 1/16 - 27
2 = 1/8 - 27
4 = 1/4 - 18
6 = 3/8 - 18
8 = 1/2 - 14
12 = 3/4 - 14
16 = 1-11 1/2
20 = 1 1/4-11 1/2
24 = 1 1/-11 1/2
32 = 2-11 1/2

MP & HP Tube

Sized by nominal tube O.D.

4 = 1/4" - 28 LH
6 = 3/8" - 24 LH
9 = 9/16" - 18 LH
12 = 3/4" - 16 LH
16 = 1" - 14 LH

6. Hose Size









-2 = 1/8" hose
-2A = 5/32" hose
-3 = 3/16" hose
-4 = 1/4" hose
-5 = 5/16" hose
-6 = 3/8" hose
-8 = 1/2" hose
-10 = 5/8" hose
-12 = 3/4" hose
-16 = 1" hose
-24 = 1-1/2" hose
-32 = 2" hose

1. Fitting Material









C = Stainless steel
Blank = Carbon steel

Any other materials will be noted in the Fitting section

Fitting Designation Descriptions




Fitting	Fitting Description	Fitting Designation
	National Pipe Tapered (NPT) - Male	01
	National Pipe Tapered (NPT) - Female	02
	JIC 37° Flare - Female	06
	Type "M" Swivel - Female	AY
	BSP Swivel - Female	92
	Metric Swivel - Female	C3 or C9
	BSP Rigid - Male	D9
	Stecko - Male	MB

Fitting Designation Descriptions




Fitting	Fitting Description	Fitting Designation
	Tube Stub Fitting	TU
	Medium Pressure Swivel - Female	5Y
	High Pressure Female Swivel	6Y
	Hammer Union (Male) Cone with Wing Nut	HE
	Hammer Union (Female) Cone Threaded End with Seal	HN
	Medium Pressure Tube Nipple	Y2
	High Pressure Tube Nipple	Y4
	Waterblast Nozzle - Female	EZ

For detailed ordering information, please consult price list or contact Parflex Division.

Fitting Designation Descriptions

Fitting	Fitting Description	Fitting Designation
	Waterblast Nozzle - Male	ZE
	Waterblast Nozzle - Female	HY
	Waterblast Nozzle - Male	YH

How to Read the Fittings Section

1	2	3	4	5	6				
Part Number	Thread Size	A Overall Length		B Cutoff Allowance		Hex H and/or J		Max. Working Pressure	
#									
		inch	mm	inch	mm	inch	mm	psi	MPa
6AYHX-6-3C	9/16" - 18	3.20	81	1.40	36	0.68	17	40,600	280.0

1 Part Number

The fitting part number gives the connection type and size of the fitting, as well as, the hose series and hose size the fitting is intended for (see part number breakdown on pg. B-2).

2 Thread Size

UNF threads will contain a number indicating the nominal diameter of the thread, followed by the pitch measured in threads per inch. Any other thread form will be identified in the thread size measurement (i.e. NPT, BSP, Metric, etc.).

3 Overall Fitting Length

This measurement indicates the total length of fitting from end to end.

4 Cutoff Allowance

End fitting dimension from the seating surface to the fitting hose stop. This dimension added to the length of the cut hose will yield the over-all length(OAL) of the hose assembly.

5 Hex Size




This is the dimension of the hex across opposing flats.

6 Maximum Working Pressure

Maximum pressure at which the fitting should be operated. Most fittings are rated for the full working pressure of the hose. Fittings with maximum pressures that differ from the hose working pressure will be called out.


Note: The working pressure of a hose assembly is dependent upon the lowest rated component of that assembly. For example, if a hose is rated to 40K psi, but the fittings are rated to 15K psi, the working pressure of that assembly is 15K psi.





55 Series Fittings

55 Series Crimp Fittings	06	JIC 37° Flare - Female	92	BSP Female Swivel	C9	Metric Swivel - Female
						
	B-7		B-7		B-8	

10655- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
10655-4-4C	6	-04	1/4	6.4	7/16" - 20	2.56	65	1.30	33	0.670	17	10,000	69
10655-6-4C	6	-04	1/4	6.4	9/16" - 18	2.64	67	1.38	35	0.670	17	10,000	69
10655-6-6C	10	-06	3/8	9.5	9/16" - 18	2.72	69	1.30	33	0.750	19	10,000	69
10655-6-8C	12	-08	1/2	12.7	9/16" - 18	2.99	76	1.38	35	0.870	22	10,000	69
10655-8-8C	12	-08	1/2	12.7	3/4" - 16	3.11	79	1.54	38	0.870	22	10,000	69

19255- BSP Swivel - Female

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
19255-4-4C	6	-04	1/4	6.4	G 1/4" - 19	2.28	58	1.02	26	0.670	17	--	--
19255-6-6C	10	-06	3/8	9.5	G 3/8" - 19	2.52	64	1.06	27	0.750	19	--	--
19255-8-8C	12	-08	1/2	12.7	G 1/2" - 14	2.87	73	1.26	32	0.940	24	--	--

*Fitting is rated to the full working pressure of the hose

55 Series Fittings

1C955- Metric Swivel - Female





Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C955-8-4C	6	-04	1/4	6.4	M 16 x 1.5	2.76	70	1.50	38	0.670	17	--	--
1C955-10-4C	6	-04	1/4	6.4	M 18 x 1.5	2.64	67	1.42	36	0.750	19	--	--
1C955-12-4C	6	-04	1/4	6.4	M 20 x 1.5	2.52	64	1.26	32	0.750	19	--	--
1C955-12-6C	10	-06	3/8	9.5	M 20 x 1.5	2.68	68	1.26	32	0.750	19	--	--
1C955-16-8C	12	-08	1/2	12.7	M 24 x 1.5	3.03	77	1.42	36	0.940	24	--	--


*Fitting is rated to the full working pressure of the hose





2X Series Fittings

2X Series Crimp Fittings	6Y	High Pressure Female Swivel	AY	Type "M" Female Swivel	Y4	High Pressure Tube Nipple	92	BSP Female Swivel
								
	B-9		B-9		B-10		B-10	

16Y2X- High Pressure Female Swivel

Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel








Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
16Y2X-4-025	4	-025	5/32	4.0	9/16" - 18	2.99	76	0.90	23	0.875	22	--	--
16Y2X-4-03	5	-03	3/16	4.8	9/16" - 18	2.99	76	0.90	23	0.875	22	--	--

*Fitting is rated to the full working pressure of the hose

1AY2X- Type "M" Female Swivel

Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AY2X-6-025-SA	4	-025	5/32	4.0	9/16" - 18	2.40	61	0.94	24	0.875	22	--	--
1AY2X-6-03-SA	5	-03	3/16	4.8	9/16"-18	3.58	91	1.50	38	0.875	22	--	--
1AY2X-6-03	5	-03	3/16	4.8	9/16" - 18	3.58	91	1.50	38	0.875	22	--	--
1AY2X-8-05-SA	8	-05	5/16	7.9	3/4"-16	3.58	91	1.50	38	1.000	25	--	--
1AY2X-10-05-SA	8	-05	5/16	7.9	7/8"-14	3.58	91	1.50	38	1.250	32	--	--

*Fitting is rated to the full working pressure of the hose

2X Series Fittings

1Y42X- High Pressure Tube Nipple

Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel








Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#	⊙				⌚					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y42X-4-025	4	-025	5/32	4.0	1/4" - 28 LH	3.50	88	1.97	50	0.615	16	--	--
1Y42X-6-025	4	-025	5/32	4.0	3/8" - 24 LH	3.90	98	2.17	55	0.615	16	--	--
1Y42X-4-03	5	-03	3/16	4.8	1/4" - 28 LH	4.60	116	2.48	63	0.732	18.6	--	--
1Y42X-6-03	5	-03	3/16	4.8	3/8" - 24 LH	4.60	116	2.28	58	0.750	19	--	--
1Y42X-9-03	5	-03	3/16	4.8	9/16" - 18 LH	4.60	116	2.48	63	0.750	19	--	--
1Y42X-6-05	8	-05	5/16	7.9	3/8" - 24 LH	4.60	116	2.48	63	0.905	23	--	--
1Y42X-9-05	8	-05	5/16	7.9	9/16" - 18 LH	4.90	125	2.48	63	0.905	23	--	--

*Fitting is rated to the full working pressure of the hose

1922X- BSP Female Swivel




Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1922X-4-03-SA	5	-03	3/16	4.8	G 1/4" - 19	3.11	79	1.02	26	0.875	22	--	--


*Fitting is rated to the full working pressure of the hose





3X Series Fittings

3X Series Crimp Fittings	06	JIC 37° Flare - Female	92	BSP Swivel - Female	C9	Metric Swivel - Female
		B-11		B-11		B-11

1063X- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1063X-6-06C	10	-06	3/8	9.5	9/16" - 18	2.72	69	1.30	33	0.870	22	10,000	69
1063X-8-06C	10	-06	3/8	9.5	3/4" - 16	2.85	73	1.28	33	1.000	24	10,000	69

1923X- BSP Female Swivel

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel








Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1923X-8-06C	10	-06	3/8	9.5	G 1/2" - 14	2.60	66	0.87	22	1.180	30	--	--

*Fitting is rated to the full working pressure of the hose

1C93X- Metric Swivel - Female




Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C93X-14-06C	10	-06	3/8	9.5	M 22 x 1.5	2.95	75	1.20	30	1.180	30	--	--
1C93X-16-06C	10	-06	3/8	9.5	M 24 x 1.5	3.50	88	1.35	34	1.180	30	--	--

*Fitting is rated to the full working pressure of the hose

5X Series Fittings


5X Series Crimp Fittings	AY	Type "M" Female Swivel	C9	Metric Female Swivel	Y2	Medium Pressure Tube Nipple
						
	B-12		B-13		B-13	





6AY5X- Type "M" Female Swivel

Material: Nipple - Very high strength stainless steel

SD / SUBSEA - High strength corrosion-resistant stainless steel

Shell and Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AY5X-11-8C	12	-08	1/2	12.7	1" - 12	4.25	108	1.72	44	1.250	32	--	--
6AY5X-16-12C	20	-12	3/4	19	1-5/16" - 12	4.26	108	1.52	39	1.500	38	--	--
6AY5X-16-12C-SD	20	-12	3/4	19	1-5/16" - 12	4.26	108	1.52	39	1.500	38	--	--
6AY5X-11-8C-SUBSEA	12	-08	1/2	12.7	1" - 12	4.22	107	1.98	50	1.250	32	--	--
1AY5X-11-08C-M-SUBSEA	12	-08	1/2	12.7	1"-12	4.42	112	1.87	47	1.250	32	--	--

*Fitting is rated to the full working pressure of the hose

5X Series Fittings

6C95X- Metric Female Swivel

Material: Nipple - Very high strength stainless steel
 Shell - Stainless steel
 Nut - Carbon steel, zinc-plated




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6C95X-16-8C	12	-08	1/2	12.7	M 24 x 1.5	3.58	91	1.45	37	1.260	32	--	--
6C95X-25-12C	20	-12	3/4	19.0	M 36 x 2	4.37	111	1.60	41	1.810	46	--	--

*Fitting is rated to the full working pressure of the hose

















6Y25X- Medium Pressure Tube Nipple

Material: Nipple - Very high strength stainless steel
 SUBSEA - High strength corrosion resistant stainless steel
 Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y25X-9-8C	12	-08	1/2	12.7	9/16" - 18 LH	4.30	109	2.19	56	1.250	32	20,000	138
6Y25X-12-8C	12	-08	1/2	12.7	3/4" - 16 LH	4.20	107	2.10	53	1.250	32	20,000	138
6Y25X-16-12C	20	-12	3/4	19.0	1" - 14 LH	7.82	199	4.72	120	1.500	38	20,000	138
1Y25X-9-08C-M-SUBSEA	12	-08	1/2	12.7	9/16" - 18 LH	6.69	174	4.31	109	1.339	34	20,000	138
1Y25X-12-08C-M-SUBSEA	12	-08	1/2	12.7	3/4" - 16 LH	7.25	184	4.70	119	1.339	34	20,000	138

8X Series Fittings

8X Series Crimp Fittings	01 NPT Male	02 NPT - Female	06 JIC 37° Flare - Female	37 45° JIC Subsea	39 90° JIC Subsea	5Y Medium Pressure Swivel - Female
	 B-14	 B-14	 B-14; B-15	 B-15	 B-15	 B-16
	92 BSP Female Swivel	9G Straight Dual Seal Subsea	9M 45° Dual Seal Subsea	9W 90° Dual Seal Subsea	AY Type M Swivel - Female	C3 Metric Swivel - Female
	 B-16	 B-15	 B-16	 B-16	 B-17	 B-17
	C9 Metric Swivel - Female	D9 BSP Rigid - Male	MB Stecko	Y2 Medium Pressure - Male		
	 B-17	 B-18	 B-18	 B-18		

6018X- NPT Male 1018X- NPT Male




Material:
Nipple - Very high strength stainless steel
A - Carbon steel AC - Stainless steel
Shell - Very high strength stainless steel
A - Carbon steel AC - Stainless steel

1018X Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6018X-2-2A	4	-025	5/32	4.0	1/8" - 27	1.86	47	0.76	19	0.630	16	15,000	103
6018X-2-2AC	4	-025	5/32	4.0	1/8" - 27	2.18	55	1.80	46	0.500	13	15,000	103
6018X-4-2AC	4	-025	5/32	4.0	1/4" - 18	2.44	62	1.35	34	0.620	16	15,000	103
6018X-6-4	6	-04	1/4	6.4	3/8" - 18	2.80	71	1.50	38	0.750	19	15,000	103
6018X-8-8C	12	-08	1/2	12.7	1/2" - 14	3.46	88	1.67	42	1.000	25	15,000	103

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1018X-4-04	6	-04	1/4	6.4	1/4" - 18	2.54	65	1.30	33	0.560	14	15,000	103
1018X-4-04C	6	-04	1/4	6.4	1/4" - 18	2.54	65	1.30	33	0.560	14	15,000	103
1018X-6-04	6	-04	1/4	6.4	3/8" - 18	2.64	67	1.38	35	0.750	19	15,000	103
1018X-6-04C	6	-04	1/4	6.4	3/8" - 18	2.64	67	1.38	35	0.750	19	15,000	103

1028X- NPT Female



Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1028X-4-04	6	-04	1/4	6.4	1/4" - 18	2.72	69	1.18	30	0.750	19	15,000	103
1028X-4-04C	6	-04	1/4	6.4	1/4" - 18	2.72	69	1.18	30	0.750	19	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-14

8X Series Fittings

6068X- JIC 37° Female Flare

1068X- JIC 37° Female Flare




Material:
Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel

1068X Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
SUBSEA - High strength stainless steel
Shell/Nut - Carbon steel, zinc-plated
C / SUBSEA- Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6068X-4-2AC	4	-025	5/32	4.0	7/16" - 20	2.17	55	1.05	27	0.560	14	10,000	69
1068X-4-04C	12	-08	1/2	12.7	3/4" - 1	3.10	79	1.30	33	0.870	22	10,000	69

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1068X-4-04	6	-04	1/4	6.4	7/16" - 20	2.24	57	1.02	26	0.750	19	10,000	69
1068X-4-04C	6	-04	1/4	6.4	7/16" - 20	2.24	57	1.02	26	0.750	19	10,000	69
1068X-6-04	6	-04	1/4	6.4	9/16" - 18	2.17	55	0.94	24	0.750	19	10,000	69
1068X-6-04C	6	-04	1/4	6.4	9/16" - 18	2.17	55	0.94	24	0.750	19	10,000	69
1068X-16-16C-SUBSEA	25	-16	1	25.4	1 5/16"-12	3.80	97	1.70	44	1.610	41	10,000	69


1378X- JIC 45°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		E		J Hex		Max. Working Pressure	
#															
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
1378X-16-16C-SUBSEA	25	-16	1	25.4	1-5/16"-12	5.00	127	2.91	74.0	1.23	31.3	1.61	41	5,000	34.5


1398X- JIC 90°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		E		J Hex		Max. Working Pressure	
#															
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
1398X-16-16C-SUBSEA	25	-16	1	25.4	1-5/16"-12	4.65	118	2.56	65.0	2.62	65.0	1.61	41	5,000	34.5

19G8X- Straight Dual Seal




Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Max. Working Pressure	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
19G8X-16-16C-SUBSEA	25	-16	1	25.4	-	3.812	97	1.726	43.8	5,000	69
19G8X-24-16C-SUBSEA	25	-16	1	25.4	-	4.062	103	1.976	50.2	5,000	69

8X Series Fittings


19M8X- Dual Seal 45°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

Part Number	Nominal I.D.				Flange Diameter		A Overall Length		B Cutoff Allowance		E		Max. Working Pressure	
#														
	DN	Size	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
19M8X-16-16C-SUBSEA	25	-16	1	25.4	1.88	47.6	5.30	134.5	3.21	81.5	1.525	38.7	5,000	34.5
19M8X-24-16C-SUBSEA	25	-16	1	25.4	2.5	63.5	5.47	139	3.39	86.0	1.702	43.2	5,000	34.5


19W8X- Dual Seal 90°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

Part Number	Nominal I.D.				Flange Diameter		A Overall Length		B Cutoff Allowance		E		Max. Working Pressure	
#														
	DN	Size	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
19W8X-16-16C-SUBSEA	25	-16	1	25.4	1.88	47.6	4.65	118	2.56	65.0	1.525	38.7	5,000	34.5
19W8X-24-16C-SUBSEA	25	-16	1	25.4	2.5	63.5	4.65	118	2.56	65.0	3.382	85.9	5,000	34.5

1928X- BSP Swivel - Female




Material:
Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated
Suffix "C" - All components Stainless Steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1928X-4-04	6	-04	1/4	6.4	G 1/4" - 19	2.20	56	0.98	25	0.750	19	--	--
1928X-4-04C	6	-04	1/4	6.4	G 1/4" - 19	2.20	56	0.98	25	0.750	19	--	--

*Fitting is rated to the full working pressure of the hose

65Y8X- Medium Pressure Swivel - Female



Material:
Nipple - Carbon steel
Shell - Carbon steel, zinc-plated
Nut - Stainless steel
Suffix "C" - All components Stainless Steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
65Y8X-6-4	6	-04	1/4	6.4	9/16" - 18	2.78	71	1.55	39	0.750	19	20,000	138
15Y8X-6-04C	6	-04	1/4	6.4	9/16" - 18	2.24	57	.937	24	0.750	19	20,000	138

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-16

8X Series Fittings

6AY8X- Type "M" Swivel - Female




Material:
Nipple - High strength steel
AC - Stainless steel
C - High strength stainless steel
Shell - Carbon steel, zinc-plated
AC - Stainless steel
C - Stainless steel
Nut - High strength steel
AC - Stainless steel
C - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AY8X-6-2AC	3	-02	1/8	3.2	9/16" - 18	2.32	59	1.24	31	0.680	17	--	--
6AY8X-6-4	6	-04	1/4	6.4	9/16" - 18	2.54	65	1.30	33	0.750	19	--	--
6AY8X-8-5C	8	-05	5/16	7.9	3/4" - 16	2.95	75	1.25	32	1.000	25	--	--
6AY8X-11-8C	12	-08	1/2	12.7	1" - 12	3.27	83	1.49	38	1.250	32	--	--

*Fitting is rated to the full working pressure of the hose

1AY8X- Type "M" Swivel - Female




Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AY8X-6-04	6	-04	1/4	6.4	9/16" - 18	2.68	68	1.38	35	0.670	17	--	--
1AY8X-6-04C	6	-04	1/4	6.4	9/16" - 18	2.68	68	1.38	35	0.670	17	--	--

*Fitting is rated to the full working pressure of the hose

1C38X- Metric Swivel - Female




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated
Nut - Carbon steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C38X-8-04	6	-04	1/4	6.4	M 14 x 1.5	2.45	62	1.20	30	0.750	19	--	--

*Fitting is rated to the full working pressure of the hose

1C98X- Metric Swivel - Female




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated
Nut - Carbon steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C98X-8-04C	6	-04	1/4	6.4	M 16 x 1.5	2.32	59	1.06	27	0.750	19	--	--
1C98X-10-04C	6	-04	1/4	6.4	M 18 x 1.5	2.20	56	1.30	33	0.866	22	--	--

*Fitting is rated to the full working pressure of the hose

8X Series Fittings

1D98X- BSP Rigid - Male




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1D98X-4-4	6	-04	1/4	6.4	1/4" BSPP	2.65	67	1.39	35	0.750	19	--	--

*Fitting is rated to the full working pressure of the hose


1MB8X- Stecko - Male



Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Max. Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1MB8X-6-4	6	-04	1/4	6.4	--	2.85	72	1.58	40	0.860	22	10,000	69

1Y28X- Medium Pressure - Male



Material:
Nipple - Stainless steel
Shell - Stainless steel

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Max. Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y28X-6-04C	6	-04	1/4	6.4	3/8"-24 LH	4.29	109	2.20	56	0.860	22	20,000	138
1Y28X-9-04C	6	-04	1/4	6.4	9/16"-18 LH	4.21	107	2.09	53	0.860	22	20,000	138

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-18

Hose
A

B Fittings




Adapters &
Valves
C

Quick Couplings
D

Accessories
E


General Technical
F





9X Series Fittings

9X Series Crimp Fittings	01	NPT - Male	06	JIC 37° Flare - Female	AY	Type "M" Swivel - Female
		B-19		B-19		B-20

6019X- NPT Male


Material: Nipple - High strength steel
C - Stainless steel
Shell - Carbon steel
C - Stainless steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6019X-4-4C	6	-04	1/4	6.4	1/4" - 18	2.38	60	1.12	28	0.630	16	15,000	103
6019X-6-6	10	-06	3/8	9.5	3/8" - 18	2.95	75	1.35	34	0.750	19	15,000	103
6019X-6-6C	10	-06	3/8	9.5	3/8" - 18	2.95	75	1.35	34	0.750	19	15,000	103
6019X-8-6	10	-06	3/8	9.5	1/2" - 14	3.16	80	1.56	40	0.870	22	15,000	103
6019X-8-6C	10	-06	3/8	9.5	1/2" - 14	3.16	80	1.56	40	0.870	22	15,000	103
6019X-8-8	12	-08	1/2	12.7	1/2" - 14	3.35	85	1.43	36	0.870	22	15,000	103
6019X-8-8C	12	-08	1/2	12.7	1/2" - 14	3.37	86	1.68	43	1.000	25	15,000	103
6019X-16-16C	25	-16	1	25.4	1" - 11 1/2	4.38	111	2.25	57	1.380	35	10,000	69

6069X- JIC 37° Female Flare

Material: Nipple - High strength stainless steel
Shell - Stainless steel
Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6069X-4-4C	6	-04	1/4	6.4	9/16" - 18	2.36	60	1.10	28	0.680	17	10,000	69
6069X-6-4C	6	-04	1/4	6.4	7/16" - 20	2.24	57	0.98	25	0.630	16	10,000	69
6069X-8-6C	10	-06	3/8	9.5	3/4" - 16	2.79	71	1.19	30	1.000	25	10,000	69
6069X-8-8C	12	-08	1/2	12.7	3/4" - 16	3.00	76	1.30	33	0.870	22	10,000	69
6069X-16-16C	25	-16	1	25.4	1-5/16" - 12	3.79	96	1.65	42	1.500	38	10,000	69
6069X-6-6C-SUBSEA	10	-06	3/8	9.5	7/16" - 20	3.64	92	1.74	44	1.000	25	10,000	69


9X Series Fittings

6AY9X- Type "M" Swivel - Female

Material: Nipple - High strength stainless steel

Shell - Stainless steel







Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AY9X-6-4C	6	-04	1/4	6.4	9/16" - 18	2.36	60	1.10	28	0.680	17	--	--
6AY9X-8-6C	10	-06	3/8	9.5	3/4" - 16	2.79	71	1.19	30	1.000	25	--	--
6AY9X-11-8C	12	-08	1/2	12.7	1" - 12	3.20	81	1.50	38	1.250	32	--	--
6AY9X-16-16C	25	-16	1	25.4	1-5/16" - 12	3.79	96	1.65	42	1.500	38	--	--


*Fitting is rated to the full working pressure of the hose

AX Series Fittings

AX Series Crimp Fittings	01	NPT - Male	02	NPT - Female	06	JIC 37° Flare - Female	AY	Type "M" Swivel - Female
		B-21		B-21		B-22		B-22
	ZE	Waterblast Nozzle - Male	EZ	Waterblast Nozzle - Female				
		B-22		B-23				

601AX- NPT Male


Material: Nipple - Carbon steel
Shell - Carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#	⊙				⋈					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
601AX-1-2A	4	-025	5/32	4.0	1/16" - 27	1.20	30	0.57	14	0.440	11	15,000	103
601AX-2-2A	4	-025	5/32	4.0	1/8" - 27	1.10	28	0.47	12	0.440	11	15,000	103
601AX-2-3	5	-03	3/16	4.8	1/8" - 27	1.28	33	0.50	13	0.460	12	15,000	103
601AX-4-5	8	-05	5/16	7.9	1/4" - 18	1.70	43	0.70	18	0.625	16	15,000	103
601AX-6-5	8	-05	5/16	7.9	3/8" - 18	1.70	43	1.02	26	0.625	16	15,000	103

602AX- NPT Female

Material: Nipple - Carbon steel
Shell - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#	⊙				⋈					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
602AX-1-2A	4	-025	5/32	4.0	1/16" - 27	1.50	38	0.86	22	0.440	11	15,000	103
602AX-2-3	5	-03	3/16	4.8	1/8" - 27	1.64	42	0.84	21	0.520	13	15,000	103

AX Series Fittings

606AX- JIC 37° Female Flare


Material: Nipple - Carbon steel
 C - Stainless steel
Shell - Carbon steel
 C - Stainless steel
Nut - Carbon steel
 C - Stainless steel

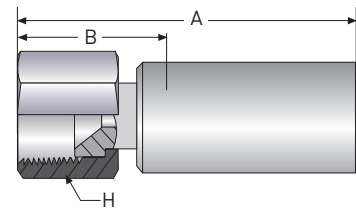

Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
606AX-4-2A	4	-025	5/32	4.0	7/16" - 20	1.53	39	0.88	22	0.630	16	10,000	69
606AX-4-3C	5	-03	3/16	4.8	7/16" - 20	1.84	47	0.86	22	0.560	14	10,000	69

6AYAX- Type "M" Swivel - Female

Material: Nipple - Carbon steel
 Shell - Carbon steel
 Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AYAX-6-2A	4	-025	5/32	4.0	9/16" - 18	1.52	39	0.86	22	0.750	19	--	--
6AYAX-6-3	5	-03	3/16	4.8	9/16" - 18	1.77	45	0.94	24	0.750	19	--	--

*Fitting is rated to the full working pressure of the hose

6ZEAX- Waterblast Nozzle - Male

Material: Nipple - Carbon steel
 Shell - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6ZEAX-5-2A	4	-025	5/32	4.0	5/16" - 24	1.31	33	0.69	18	0.440	11	--	--

*Fitting is rated to the full working pressure of the hose

AX Series Fittings

6EZAX- Waterblast Nozzle - Female




Material: Nipple - Carbon steel
Shell - Carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6EZAX-5-2A	4	-025	5/32	4.0	5/16" - 24	1.50	38	0.90	23	0.440	11	--	--


*Fitting is rated to the full working pressure of the hose





BL Series Fittings

BL Series Crimp Fittings	01	NPT - Male	AY	Type "M" Swivel - Female	C9	Metric Swivel - Female
						
	B-24		B-24		B-25	

101BL- NPT Male


Material: Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101BL-6-06	10	-06	3/8	9.5	3/8" - 18	3.15	80	1.38	35	0.870	22	15,000	103
101BL-8-08	12	-08	1/2	12.7	1/2" - 14	3.54	90	1.77	45	0.870	22	15,000	103
101BL-8-08C	12	-08	1/2	12.7	1/2" - 14	3.54	90	1.77	45	0.870	22	15,000	103
101BL-12-12	20	-12	3/4	19.0	3/4" - 14	3.86	98	1.77	45	1.180	30	10,000	69

1AYBL- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel
Nut - Carbon steel, zinc-plated
C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYBL-11-06	10	-06	3/8	9.5	1" - 12	3.03	77	1.24	31	1.250	32	--	--
1AYBL-11-08	12	-08	1/2	12.7	1" - 12	3.03	77	1.24	31	1.250	32	--	--
1AYBL-11-08C	12	-08	1/2	12.7	1" - 12	3.03	77	1.24	31	1.250	32	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-24

BL Series Fittings

1C9BL- Metric Swivel - Female




Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C9BL-14-06	10	-06	3/8	9.5	M 22 x 1.5	3.15	80	1.43	36	1.180	30	--	--
1C9BL-16-06	10	-06	3/8	9.5	M 24 x 1.5	3.31	84	1.43	36	1.180	30	--	--
1C9BL-14-08	12	-08	1/2	12.7	M 22 x 1.5	3.15	80	1.43	36	1.060	27	--	--
1C9BL-16-08	12	-08	1/2	12.7	M 24 x 1.5	3.15	80	1.43	36	1.180	30	--	--
1C9BL-25-12	20	-12	3/4	19.0	M 36 x 2.0	3.82	97	1.75	44	1.810	46	--	--

*Fitting is rated to the full working pressure of the hose

BS Series Fittings

BS Series Crimp Fittings	01	NPT - Male	AY	Type "M" Swivel - Female	C9	Metric Swivel - Female
						
	B-26		B-26		B-27	


101BS- NPT Male

Material: Nipple - Carbon steel, zinc-plated

C - Stainless steel

Shell - Carbon steel, zinc-plated

C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101BS-8-08	12	-08	1/2	12.7	1/2" - 14	3.66	93	1.56	40	0.870	22	15,000	103
101BS-8-08C	12	-08	1/2	12.7	1/2" - 14	3.66	93	1.56	40	0.870	22	15,000	103


1AYBS- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated

C - Stainless steel

Shell - Carbon steel, zinc-plated

C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYBS-11-08	12	-08	1/2	12.7	1" - 12	3.03	77	1.24	31	1.250	32	--	--
1AYBS-11-08C	12	-08	1/2	12.7	1" - 12	3.03	77	1.24	31	1.250	32	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-26

BS Series Fittings

1C9BS- Metric Swivel - Female


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C9BS-16-08	12	-08	1/2	12.7	M 24 x 1.5	3.50	89	1.43	36	1.180	30	--	--


*Fitting is rated to the full working pressure of the hose

CR Series Fittings

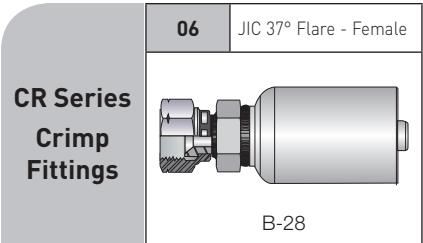


606CR- JIC 37° Female Flare

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
606CR-8-8C	12	-08	1/2	12.7	3/4" - 16	3.88	98	2.13	54	1.000	25	5,000	34.5
606CR-16-16C	25	-16	1	25.4	1 5/16" - 12	5.00	127	2.75	70	1.625	41	5,000	34.5



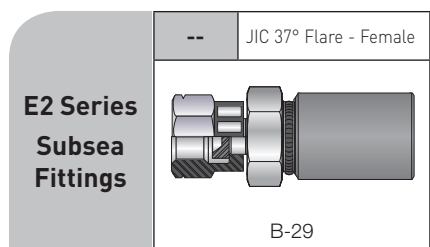

E2 Series Subsea Fittings









E2 - JIC 37° Female Flare

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
E206JCC3	4	-04	1/4	6.4	7/16" - 20	2.12	54	1.20	30	0.63	16	10,000	69
E206JEC3	4	-04	1/4	6.4	9/16" - 18	2.20	56	1.12	28	0.75	19	10,000	69
E213JFC4	8	-08	1/2	12.7	3/4" - 16	3.35	85	1.61	41	0.94	24	10,000	69
E220JHC1	12	-12	3/4	19.0	1 1/16" - 12	4.00	102	2.16	54.7	1.42	36	6,017	42
E225JIC3	16	-16	1	25.4	1 5/16" - 12	4.30	109	2.10	53	1.63	41	4,060	28

E3 Series* Subsea Fittings

E3 Series Subsea Fittings	9W	90° Dual Seal	9M	45° Dual Seal	9G	Straight Dual Seal	39	90° JIC
								
	B-30		B-30		B-31		B-31	
	37	45° JIC	06	Straight JIC	*PATENT PENDING			
								
	B-32		B-32					

19WE3 - 90° Dual Seal


Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Flange Size	A Overall Length		B Cutoff Allowance		F		E		Maximum Working Pressure	
#	⊙													↗	
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
19WE3-8-8C	12	-08	1/2	12.7	1/2	4.11	104	2.44	62	1.25	32	2.11	54	5,000	34
19WE3-16-8C	12	-08	1/2	12.7	1	4.11	104	2.44	62	1.88	48	2.17	55	5,000	34
19WE3-16-16C	25	-16	1	25.4	1	5.45	138	3.13	80	1.88	48	3.27	83	5,000	34
19WE3-24-16C	25	-16	1	25.4	1-1/2	5.88	149	3.38	86	2.50	64	3.52	89	5,000	34

19ME3 - 45° Dual Seal

Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Flange Size	A Overall Length		B Cutoff Allowance		F		E		Maximum Working Pressure	
#	⊙													↗	
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
19ME3-8-8C	12	-08	1/2	12.7	1/2	4.49	114	2.68	68	1.25	32	0.87	22	5,000	34
19ME3-16-8C	12	-08	1/2	12.7	1	4.53	115	2.68	68	1.88	48	0.92	23	5,000	34
19ME3-16-16C	25	-16	1	25.4	1	6.24	158	3.88	99	1.88	48	1.42	36	5,000	34
19ME3-24-16C	25	-16	1	25.4	1-1/2	6.32	161	3.93	100	2.50	64	1.86	47	5,000	34

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-30

Hose
A

Fittings
B

Adapters & Valves
C

Quick Couplings
D


Accessories
E

General Technical
F

E3 Series* Subsea Fittings

19GE3 - Straight Dual Seal


Material: Nipple - Stainless steel
Shell - Stainless steel







Part Number	Nominal I.D.				Flange Size	A Overall Length		B Cutoff Allowance		F		Maximum Working Pressure	
#													
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	psi	MPa
19GE3-8-8C	12	-08	1/2	12.7	1/2	3.26	83	1.56	40	1.25	32	5,000	34
19GE3-16-8C	12	-08	1/2	12.7	1	3.26	83	1.56	40	1.25	32	5,000	34
19GE3-16-16C	25	-16	1	25.4	1	4.35	110	2.00	51	1.88	48	5,000	34
19GE3-24-16C	25	-16	1	25.4	1-1/2	4.48	114	2.13	54	2.50	64	5,000	34

139E3 - 90° JIC

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		E		Maximum Working Pressure	
#															
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
139E3-4-4C	6	-04	1/4	6.4	7/16" x 20	2.41	61	1.38	35	5/8	16	0.83	21	5,000	69
139E3-6-4C	6	-04	1/4	6.4	9/16" x 18	2.41	61	1.38	35	3/4	19	0.91	23	5,000	69
139E3-8-8C-411	12	-08	1/2	12.7	3/4" x 16	4.11	104	2.44	62	15/16	24	2.11	54	5,000	69
139E3-16-16C-411	25	-16	1	25.4	1-5/16" x 12	5.69	145	3.32	84	1-5/8	41	3.27	83	5,000	69

***PATENT PENDING**

E3 Series* Subsea Fittings

137E3 - 45° JIC


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		E		Maximum Working Pressure	
#															
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
137E3-4-4C	6	-04	1/4	6.4	7/16" x 20	2.51	64	1.50	38	5/8	16	0.39	10	5,000	35
137E3-6-4C	6	-04	1/4	6.4	9/16" x 18	2.70	69	1.68	43	3/4	19	0.43	11	5,000	35
137E3-8-8C-411	12	-08	1/2	12.7	3/4" x 16	4.75	121	3.06	78	15/16	24	1.14	29	5,000	35
137E3-16-16C-411	25	-16	1	25.4	1-5/16" x 12	6.50	165	4.13	105	1-5/8	41	1.69	43	5,000	35

106E3 - Straight JIC

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		H Hex		Maximum Working Pressure	
#															
	DN	Size	inch	mm	inch	inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
106E3-4-4C	6	-04	1/4	6.4	7/16" x 20	2.46	62	1.44	37	5/8	16	5/8	16	5,000	35
106E3-6-4C	6	-04	1/4	6.4	9/16" x 18	2.55	65	1.50	38	3/4	19	5/8	16	5,000	35
106E3-8-8C	12	-08	1/2	12.7	3/4" x 16	3.55	90	1.88	48	1	25	15/16	24	5,000	35
106E3-16-16C	25	-16	1	25.4	1-5/16" x 12	4.76	121	2.38	60	1-5/8	41	1-1/2	41	5,000	35

***PATENT PENDING**

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-32

Hose
A

Fittings
B




Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

EX Series Fittings

EX Series Crimp Fittings	01	NPT - Male	06	JIC 37° Flare - Female	C9	Metric Swivel - Female
		B-33		B-33		B-33


101EX- NPT Male





Material: Nipple - Carbon steel, zinc-plated

Shell - Carbon steel, zinc-plated

C - Nipple - Stainless steel

Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101EX-4-012	2	-012	5/64	2	1/4" - 18	1.54	39	1.10	28	0.560	14	15,000	103
101EX-2-012	2	-012	5/64	2	1/8" - 27	1.37	35	0.93	24	0.44	11	15,000	103
601EX-2-2C	3	-02	1/8	3.2	1/8" - 27	1.33	34	.93	24	0.44	11	15,000	103





106EX- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated

Shell - Carbon steel, zinc-plated

Nut - Carbon steel, zinc-plated




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
106EX-4-012	2	-012	5/64	2	7/16" - 20	1.00	25	0.55	14	0.670	17	10,000	69
106EX-4-02	3	-02	1/8	3.2	7/16" - 20	.945	24	0.55	14	0.670	17	10,000	69





1C9EX- Metric Swivel - Female

Material: Nipple - Carbon steel, zinc-plated

Shell - Carbon steel, zinc-plated

Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C9EX-8-012	2	-012	5/64	2	M 16 x 1.5	1.50	37	1.14	29	0.750	19	--	--
1C9EX-6-012	2	-012	5/64	2	M 14 x 1.5	1.30	32	0.83	21	0.670	17	--	--
1C9EX-8-02	3	-02	1/8	3.2	M 16 x 1.5	1.30	32	0.87	22	0.750	19	--	--

*Fitting is rated to the full working pressure of the hose



B-33



For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd





HP Series Fittings

HP Series Crimp Fittings	01	NPT - Male	06	JIC 37° Flare - Female
				
	B-34		B-34	

101HP- NPT Male


Material: Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101HP-2-3	5	-03	3/16	4.8	1/8" - 27	1.94	49	1.19	30	0.560	14	15,000	103
101HP-4-3	5	-03	3/16	4.8	1/4" - 18	2.12	54	1.38	35	0.690	17	15,000	103
101HP-6-3	5	-03	3/16	4.8	3/8" - 18	2.22	56	1.50	38	0.750	19	15,000	103
101HP-2-4	6	-04	1/4	6.4	1/8" - 27	2.10	53	1.19	30	0.630	16	15,000	103
101HP-4-4	6	-04	1/4	6.4	1/4" - 18	2.28	58	1.38	35	0.690	17	15,000	103
101HP-6-4	6	-04	1/4	6.4	3/8" - 18	2.38	60	1.38	35	0.750	19	15,000	103
101HP-6-4C	6	-04	1/4	6.4	3/8" - 18	2.38	60	1.38	35	0.750	19	15,000	103
101HP-4-6	10	-06	3/8	9.5	1/4" - 18	2.70	69	1.50	38	0.750	19	15,000	103
101HP-6-6	10	-06	3/8	9.5	3/8" - 18	2.70	69	1.50	38	0.750	19	15,000	103
101HP-8-6	10	-06	3/8	9.5	1/2" - 14	2.96	75	1.75	44	0.940	24	15,000	103

106HP- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
106HP-4-3	5	-03	3/16	4.8	7/16" - 20	2.20	56	1.44	37	0.630	16	10,000	69
106HP-4-4	6	-04	1/4	6.4	7/16" - 20	2.49	63	1.56	40	0.630	16	10,000	69
106HP-4-4C	6	-04	1/4	6.4	7/16" - 20	2.49	63	1.56	40	0.630	16	10,000	69
106HP-6-4	6	-04	1/4	6.4	9/16" - 18	2.59	66	1.69	43	0.750	19	10,000	69
106HP-6-6	10	-06	3/8	9.5	9/16" - 18	2.91	74	1.63	41	0.750	19	10,000	69
106HP-6-6C	10	-06	3/8	9.5	9/16" - 18	2.91	74	1.63	41	0.750	19	10,000	69
106HP-8-6C	10	-06	3/8	9.5	3/4" - 16	3.10	79	1.80	46	0.938	24	10,000	69



For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-34

HX Series Fittings

HX Series Crimp Fittings	Y4	High Pressure - Male	Y2	High Pressure - Male only qualified with 2440D-05V32
	 B-35		 B-35	

6Y4HX- High Pressure Male

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y4HX-9-5C-XLT	8	-05	5/16	7.9	9/16" - 18	5.00	127	3.38	86	1.000	25	--	--


*Fitting is rated to the full working pressure of the hose

6Y2HX- High Pressure Male

only qualified with 2440D-05V32

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated




Note: -THD: Extra long thread
-LONG: Extra long tube



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y2HX-9-5C-THD	8	-05	5/16	7.9	9/16" - 18 LH	3.83	97	2.13	54	.95	24	--	--
6Y2HX-9-5C-LONG	8	-05	5/16	7.9	9/16" - 18 LH	4.53	115	2.83	72	.95	24	--	--


*Fitting is rated to the full working pressure of the hose





KY Series Fittings

KY Series Crimp Fittings	01	NPT - Male	AY	Type "M" Swivel - Female	Y4	High Pressure - Male
	 B-36		 B-36		 B-37	

101KY- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101KY-4-04	6	-04	1/4	6.4	1/4" - 18	2.22	56	1.14	29	0.390	10	15,000	103
101KY-4-05	8	-05	5/16	7.9	1/4" - 18	2.70	69	1.42	36	0.511	13	15,000	103
101KY-6-04	6	-04	1/4	6.4	3/8" - 18	2.64	67	1.38	35	0.670	17	15,000	103

1AYKY- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYKY-6-04	6	-04	1/4	6.4	9/16" - 18	2.28	58	0.98	25	0.748	19	15,000	103
1AYKY-8-05	8	-05	5/16	7.9	3/4" - 16	2.64	67	1.22	31	1.063	27	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-36

Hose
A

B Fittings

Adapters &
Valves
C

D Quick Couplings


E Accessories

F General Technical

KY Series Fittings

1Y4KY- High Pressure - Male














Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y4KY-9-05	8	-05	5/16	7.9	9/16" - 18	3.90	99	2.60	66	0.787	20	--	--


*Fitting is rated to the full working pressure of the hose





LX Series Fittings

LX Series Crimp Fittings	01 NPT - Male	06 JIC 37° Flare - Female	92 BSP Swivel - Female	5Y Medium Pressure Swivel - Female
	 B-38	 B-39	 B-40	 B-40
	6Y High Pressure Swivel - Female	AY Type "M" Swivel - Female	C9 Metric Swivel - Female	HE Hammer Union - Male Cone
	 B-41	 B-41	 B-42	 B-43
	HN Hammer Union - Female Cone	HY Waterblast Nozzle - Female	Y2 Medium Pressure - Male	Y4 High Pressure - Male
	 B-43	 B-44	 B-45	 B-46
	YH Waterblast Nozzle - Male			
	 B-47			

601LX- NPT Male

Material: Nipple - High strength steel
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
601LX-2-2AC	4	-025	5/32	4.0	1/8" - 27	1.90	48	0.76	19	0.500	13	15,000	103
601LX-4-3	5	-03	3/16	4.8	1/4" - 18	2.86	73	1.30	33	0.560	14	15,000	103
601LX-4-4C	6	-04	1/4	6.4	1/4" - 18	2.62	67	1.34	34	0.630	16	15,000	103
601LX-4-5	8	-05	5/16	7.9	1/4" - 18	2.78	71	1.18	30	0.630	16	15,000	103
601LX-4-5C	8	-05	5/16	7.9	1/4" - 18	2.78	71	1.18	30	0.630	16	15,000	103
601LX-6-5	8	-05	5/16	7.9	3/8" - 18	3.96	75	1.37	35	0.750	19	15,000	103
601LX-6-5C	8	-05	5/16	7.9	3/8" - 18	3.96	75	1.37	35	0.750	19	15,000	103
601LX-8-8	12	-08	1/2	12.7	1/2" - 14	3.75	95	1.70	43	1.130	29	15,000	103
601LX-8-8C	12	-08	1/2	12.7	1/2" - 14	3.75	95	1.70	43	1.130	29	15,000	103
601LX-12-12C	20	-12	3/4	19.0	3/4" - 14	4.75	121	2.10	53	1.380	35	10,000	69
601LX-16-12C	20	-12	3/4	19.0	1" - 11 1/2	4.90	124	2.25	57	1.380	35	10,000	69
601LX-16-16C	25	-16	1	25.4	1" - 11 1/2	5.00	125	2.50	64	1.380	35	10,000	69

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-38

LX Series Fittings

101LX- NPT Male


Material: Nipple - Carbon steel, zinc-plated C - Stainless steel
 Shell - Carbon steel, zinc-plated C - Stainless steel
 Nut - Carbon steel, zinc-plated C / SUBSEA - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101LX-4-04	6	-04	1/4	6.4	1/4"-18	3.15	80	1.42	36	0.560	14	15,000	103
101LX-4-04C	6	-04	1/4	6.4	1/4"-18	3.15	80	1.42	36	0.560	14	15,000	103
101LX-6-04	6	-04	1/4	6.4	3/8"-18	3.15	80	1.42	36	0.750	19	15,000	103
101LX-8-08	12	-08	1/2	12.7	1/2"-14	3.58	91	1.46	37	0.87	22	15,000	103
101LX-8-08C	12	-08	1/2	12.7	1/2"-14	3.58	91	1.46	37	0.87	22	15,000	103

606LX- JIC 37° Female Flare


Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
606LX-6-5C	8	-05	5/16	7.9	9/16" - 18	2.70	69	1.10	28	0.75	19	10,000	69
606LX-8-5C	8	-05	5/16	7.9	3/4" - 16	2.82	72	1.22	31	1.00	25	10,000	69
606LX-8-8C	12	-08	1/2	12.7	3/4" - 16	3.80	96	1.75	44	1.063	27	10,000	69
606LX-16-12C	20	-12	3/4	19.0	1-5/16" - 12	4.29	109	1.68	43	1.50	38	10,000	69
606LX-16-16C	25	-16	1	25.4	1-5/16" - 12	3.79	96	1.65	42	1.50	38	10,000	69

106LX- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated C - Stainless steel
 Shell - Carbon steel, zinc-plated C - Stainless steel
 Nut - Carbon steel, zinc-plated C / SUBSEA - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
106LX-6-04C	6	-04	1/4	6.4	9/16"-18	3.03	77	1.26	32	0.75	19	10,000	69
106LX-6-05C	8	-05	5/16	7.9	9/16"-18	3.07	78	1.30	33	0.75	19	10,000	69
106LX-8-08	12	-08	1/2	12.7	3/4" - 16	2.52	64	0.83	21	1.06	27	10,000	69
106LX-8-08C	12	-08	1/2	12.7	3/4" - 16	2.52	64	0.83	21	1.06	27	10,000	69
106LX-6-06C-M-SUBSEA	10	-06	3/8	9.5	9/16"-18	2.32	59	0.71	18	0.87	22	10,000	69
106LX-8-06C-M-SUBSEA	10	-06	3/8	9.5	3/4"-16	2.32	59	0.75	19	0.94	24	10,000	69
106LX-8-08C-M-SUBSEA	12	-08	1/2	12.7	3/4"-16	2.52	64	0.83	21	1.06	27	10,000	69

LX Series Fittings

692LX- BSP Swivel - Female

Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - -3 size: Stainless steel
 -5 size: Carbon steel, zinc-plated




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
692LX-4-3C	5	-03	3/16	4.8	G 1/4" - 19 BSPP	2.83	72	1.30	33	0.88	22	--	--
692LX-6-5C	8	-05	5/16	7.9	G 3/8" - 19 BSPP	2.90	74	1.20	30	1.06	27	--	--

*Fitting is rated to the full working pressure of the hose

192LX- BSP Swivel - Female

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
192LX-8-08C	12	-08	1/2	12.7	G 1/2" - 14 BSPP	2.95	75	0.82	21	1.18	30	--	--

*Fitting is rated to the full working pressure of the hose

65YLX- Medium Pressure Female Swivel

Material: Nipple - High strength steel
 C - High strength stainless steel
 Shell - Carbon steel, zinc-plated
 Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
65YLX-6-3	5	-03	3/16	4.8	9/16" - 18	3.08	78	1.53	39	0.75	19	20,000	138
65YLX-6-3C	5	-03	3/16	4.8	9/16" - 18	3.20	81	1.67	42	0.75	19	20,000	138
65YLX-6-4C	6	-04	1/4	6.4	9/16" - 18	2.84	72	1.54	39	0.75	19	20,000	138

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-40

Hose
A

Fittings
B

Adapters & Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

LX Series Fittings


66YLX- High Pressure Female Swivel

Material: Nipple - High strength steel

C - High strength stainless steel

Shell - Carbon steel, zinc-plated

Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
66YLX-4-3	5	-03	3/16	4.8	9/16" - 18	2.80	71	1.28	33	0.75	19	--	--
66YLX-4-3C	5	-03	3/16	4.8	9/16" - 18	2.93	74	1.42	36	0.68	17	--	--

*Fitting is rated to the full working pressure of the hose

1AYLX- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated


C - Stainless steel

Shell - Carbon steel, zinc-plated

C - Stainless steel

Nut - Carbon steel, zinc-plated

C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYLX-6-02	3	-02	1/8	3.2	9/16" - 18	1.89	48	1.02	26	0.87	22	--	--
1AYLX-6-04	6	-04	1/4	6.4	9/16" - 18	2.40	61	1.13	29	0.87	22	--	--
1AYLX-6-04C	6	-04	1/4	6.4	9/16" - 18	2.95	75	1.26	32	0.87	22	--	--
1AYLX-8-05C	8	-05	5/16	7.9	3/4" - 16	2.76	70	1.22	31	1.06	27	--	--
1AYLX-11-08	12	-08	1/2	12.7	1" - 12	3.19	81	1.06	27	1.26	32	--	--
1AYLX-11-08C	12	-08	1/2	12.7	1" - 12	3.19	81	1.06	27	1.26	32	--	--

*Fitting is rated to the full working pressure of the hose

LX Series Fittings

6AYLX- Type "M" Swivel - Female

Material: Nipple - High strength steel


C - High strength stainless steel

SD / HCL / SUBSEA - High strength, corrosion-resistant stainless steel

Shell - Carbon steel, zinc-plated

C / SD / HCL / SUBSEA - Stainless steel

Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AYLX-6-2AC	4	-025	5/32	4.0	9/16" - 18	2.51	64	1.28	33	0.68	17	--	--
6AYLX-6-3	5	-03	3/16	4.8	9/16" - 18	2.80	71	1.28	33	0.75	19	--	--
6AYLX-6-3C	5	-03	3/16	4.8	9/16" - 18	2.93	74	1.42	36	0.68	17	--	--
6AYLX-6-4	6	-04	1/4	6.4	9/16" - 18	2.69	68	1.39	35	0.68	17	--	--
6AYLX-6-4C	6	-04	1/4	6.4	9/16" - 18	2.69	68	1.39	35	0.68	17	--	--
6AYLX-6-4C-SD	6	-04	1/4	6.4	9/16" - 18	2.54	65	1.30	33	0.75	19	--	--
6AYLX-8-5C	8	-05	5/16	7.9	3/4" - 16	2.82	72	1.22	31	1.00	25	--	--
6AYLX-8-6C	10	-06	3/8	9.5	3/4" - 16	2.95	75	1.25	32	1.00	25	--	--
6AYLX-11-8C	12	-08	1/2	12.7	1" - 12	3.53	90	1.50	38	1.25	32	--	--
6AYLX-11-8C-SD	12	-08	1/2	12.7	1" - 12	3.53	90	1.50	38	1.25	32	--	--
6AYLX-16-12C	20	-12	3/4	19.0	1-5/16" - 12	4.15	105	1.52	39	1.50	38	--	--
6AYLX-16-12C-SD	20	-12	3/4	19.0	1-5/16" - 12	4.29	109	1.64	42	1.50	38	--	--
6AYLX-16-16C	25	-16	1	25.4	1-5/16" - 12	5.45	139	2.04	52	1.50	38	--	--
6AYLX-16-16C-SD	25	-16	1	25.4	1-5/16" - 12	5.45	139	2.04	52	1.50	38	--	--
6AYLX-16-16-HCL	25	-16	1	25.4	1-5/16" - 12	5.45	139	2.04	52	1.50	38	--	--
6AYLX-8-5C-M-SUBSEA	8	-05	5/16	7.9	3/4"-16	3.65	93	1.76	45	0.88	22	--	--
6AYLX-8-6C-M-SUBSEA	10	-06	3/8	9.5	3/4"-16	3.23	82	1.45	37	1.00	25	--	--


*Fitting is rated to the full working pressure of the hose

6C9LX- Metric Swivel - Female

Material: Nipple - High strength stainless steel

Shell - Stainless steel

Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6C9LX-16-8C	12	-08	1/2	12.7	M 24 x 1.5	3.48	88	1.44	37	1.26	32	--	--
6C9LX-25-12C	20	-12	3/4	19.0	M 36 x 2	4.26	108	1.58	40	1.81	46	--	--
6C9LX-30-16C	25	-16	1	25.4	M 42 x 2	4.65	118	2.05	52	1.97	50	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-42

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D


Accessories
E





General Technical
F

LX Series Fittings

1C9LX- Metric Swivel - Female

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		J Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1C9LX-16-08C	12	-08	1/2	12.7	M 24 x 1.5	3.46	88	1.34	34	1.26	32	--	--

*Fitting is rated to the full working pressure of the hose

6HELX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
Shell - Stainless steel
Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
6HELX-16-16-HCL	25	-16	1	25.4	2-5/16" - 2.5 ACME	6.00	153	3.63	92	--	--

*Fitting is rated to the full working pressure of the hose

6HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
6HNLX-16-16-HCL	25	-16	1	25.4	2-5/16" - 2.5 ACME	6.00	153	3.63	92	--	--

*Fitting is rated to the full working pressure of the hose

LX Series Fittings

1HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength stainless steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#	⊙				⋈					↗	
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HNLX-32-16C4462	25	-16	1	25.4	4 1/8"-3 ACME	5.59	142	3.43	87	--	--

*Fitting is rated to the full working pressure of the hose

6HYLX- Waterblast Nozzle - Female

Material: Nipple - High strength stainless steel
Shell - Stainless steel

Note: ProLance Fitting



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#	⊙				⋈					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6HYLX-4-2AC-PL	4	-025	5/32	4	1/4" - 28 UNF	2.01	51	0.75	19	0.35	9	--	--
6HYLX-4-2AC-PL-LH	4	-025	5/32	4	1/4" - 28 UNF LH	2.01	51	0.75	19	0.35	9	--	--
6HYLX-4-3C-PL	5	-03	3/16	4.8	1/4" - 28 UNF	2.05	52	0.75	19	0.35	9	--	--
6HYLX-4-3C-PL-LH	5	-03	3/16	4.8	1/4" - 28 UNF LH	2.05	52	0.75	19	0.35	9	--	--
6HYLX-6-3C-PL	5	-03	3/16	4.8	3/8" - 24 UNF	2.20	56	0.91	23	0.43	11	--	--
6HYLX-6-3C-PL-LH	5	-03	3/16	4.8	3/8" - 24 UNF LH	2.20	56	0.91	23	0.43	11	--	--
6HYLX-6-4C-PL	5	-04	1/4	6.4	3/8" - 24 UNF	2.28	58	0.98	25	0.43	11	--	--
6HYLX-6-4C-PL-LH	5	-04	1/4	6.4	3/8" - 24 UNF LF	2.28	58	0.98	25	0.43	11	--	--
6HYLX-9-5C-PL	8	-05	5/16	7.9	9/16" - 18 UNF	2.83	72	1.10	28	0.67	17	--	--
6HYLX-9-5C-PL-LH	8	-05	5/16	7.9	9/16" - 18 UNF LH	2.83	72	1.10	28	0.67	17	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-44

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D


Accessories
E

General Technical
F

LX Series Fittings

1HYLX- Waterblast Nozzle - Female

Material: Nipple - High strength stainless steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1HYLX-4-02	3	-02	1/8	3.2	1/4"-28	1.77	45	0.87	22	0.34	9	--	--
1HYLX-4-02-LH	3	-02	1/8	3.2	1/4"-28 LH	1.77	45	0.87	22	0.34	9	--	--

*Fitting is rated to the full working pressure of the hose

6Y2LX- Medium Pressure - Male

Material: Nipple - High strength stainless steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y2LX-9-5C	8	-05	5/16	7.9	9/16" - 18 LH	2.60	66	0.88	22	0.82	21	20,000	138
6Y2LX-12-5C	8	-05	5/16	7.9	3/4" - 16 LH	3.74	95	2.05	52	0.95	24	20,000	138
6Y2LX-9-6C	10	-06	3/8	9.5	9/16" - 18 LH	3.80	97	2.04	52	1.22	31	20,000	138
6Y2LX-9-8C	12	-08	1/2	12.7	9/16" - 18 LH	4.20	107	2.20	56	1.13	29	20,000	138
6Y2LX-12-8C	12	-08	1/2	12.7	3/4" - 16 LH	4.13	105	2.08	53	1.13	29	20,000	138
6Y2LX-16-12C	20	-12	3/4	19.0	1" - 14 UNF LH	5.39	137	2.75	70	1.56	40	20,000	138

LX Series Fittings

1Y2LX- Medium Pressure - Male


Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 SUBSEA - High strength stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y2LX-6-04	6	-04	1/4	6.4	3/8" - 24 LH	4.72	120	2.56	65	0.67	17	20,000	138
1Y2LX-9-08C	12	-08	1/2	12.7	9/16" - 18 LH	4.33	110	2.36	60	1.22	31	20,000	138
1Y2LX-12-08C	12	-08	1/2	12.7	3/4 - 16 LH	6.22	158	4.09	104	1.22	31	20,000	138
1Y2LX-12-08C-M-SUBSEA	12	-08	1/2	12.7	3/4 - 16 LH	7.25	184	4.70	119	1.30	33	20,000	138
1Y2LX-16-16C4462	25	-16	1	25.4	1" - 14 LH	7.13	181	5.00	127	1.06	27	20,000	138

6Y4LX- High Pressure - Male


Material: Nipple - High strength stainless steel
 Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y4LX-4-2AC	4	-025	5/32	4.0	1/4" - 28 LH	2.96	75	1.71	43	0.63	16	--	--
6Y4LX-6-2AC	4	-025	5/32	4.0	3/8" - 24 LH	3.40	86	2.16	55	0.63	16	--	--
6Y4LX-6-3C	5	-03	3/16	4.8	3/8" - 24 LH	3.86	98	2.35	60	0.67	17	--	--
6Y4LX-9-3C	5	-03	3/16	4.8	9/16" - 18 LH	4.20	107	2.70	69	0.67	17	--	--

1Y4LX- High Pressure - Male

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y4LX-4-02	3	-02	1/8	3.2	1/4" - 28 LH	2.47	63	1.57	40	0.43	11	--	--
1Y4LX-9-08C	12	-08	1/2	12.7	9/16" - 18 LH	4.88	124	2.75	70	1.38	35	--	--

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-46

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E


General Technical
F

LX Series Fittings

6YHLX- Waterblast Nozzle - Male

Material: Nipple - High strength stainless steel
Shell - Stainless steel

Note: ProLance Fitting
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#	⊙				⌋					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6YHLX-4-2AC-PL	4	-025	5/32	4	1/4" - 28 UNF	2.28	58	1.02	26	0.31	8	--	--
6YHLX-4-2AC-PL-LH	4	-025	5/32	4	1/4" - 28 UNF LH	2.28	58	1.02	26	0.31	8	--	--
6YHLX-4-3C-PL	5	-03	3/16	4.8	1/4" - 28 UNF	2.44	62	1.14	29	0.39	10	--	--
6YHLX-4-3C-PL-LH	5	-03	3/16	4.8	1/4" - 28 UNF LH	2.44	62	1.14	29	0.39	10	--	--
6YHLX-6-3C-PL	5	-03	3/16	4.8	3/8" - 24 UNF	2.56	65	1.26	32	0.39	10	--	--
6YHLX-6-3C-PL-LH	5	-03	3/16	4.8	3/8" - 24 UNF LH	2.56	65	1.26	32	0.39	10	--	--
6YHLX-6-4C-PL	6	-04	1/4	6.4	3/8" - 24 UNF	2.60	66	1.42	36	0.43	11		
6YHLX-6-4C-PL-LH	6	-04	1/4	6.4	3/8" - 24 UNF LH	2.60	66	1.42	36	0.43	11		
6YHLX-9-5C-PL	8	-05	5/16	7.9	9/16" - 18 UNF	3.15	80	1.42	36	0.63	16	--	--
6YHLX-9-5C-PL-LH	8	-05	5/16	7.9	9/16" - 18 UNF LH	3.15	80	1.42	36	0.63	16	--	--

*Fitting is rated to the full working pressure of the hose

1YHLX- Waterblast Nozzle - Male







Material: Nipple - High strength stainless steel
Shell - Carbon steel, zinc-plated
SC - Nipple - Carbon steel, zinc-plated
Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#	⊙				⌋					∅		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1YHLX-4-02	3	-02	1/8	3.2	1/4" - 28	1.772	45	0.87	22	0.34	9	--	--
1YHLX-4-02-LH	3	-02	1/8	3.2	1/4" - 28 LH	1.772	45	0.87	22	0.34	9	--	--
1YHLX-9-06SC	10	-06	3/8	9.5	9/16" - 18 LH	3.126	79	1.34	34	1.06	27	--	--

*Fitting is rated to the full working pressure of the hose



NX Series Fittings

NX Series Crimp Fittings	01	NPT - Male	01	*NPT - Male Prolance	02	NPT - Female	06	JIC 37° Flare - Female
		B-48		B-48		B-49		B-49
	AY	Type "M" Swivel - Female	D9	BSP Rigid - Male				
		B-50		B-50				

601NX- NPT Male

Material: Nipple - Carbon steel
C - Stainless steel
Shell - Carbon steel
C - Stainless steel


NOTE: *ProLance Fitting



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
601NX-2-4*	6	-04	1/4	6.4	1/8" - 27	1.44	37	0.50	13	NA	NA	15,000	103
601NX-4-4*	6	-04	1/4	6.4	1/4" - 18	1.56	40	1.35	34	NA	NA	15,000	103
601NX-4-4C	6	-04	1/4	6.4	1/4" - 18	2.38	60	1.12	28	0.63	16	15,000	103

101NX- NPT Male

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#	⊙				⋈					⬡		↗	
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101NX-4-04	6	-04	1/4	6.4	1/4" - 18	2.57	65	1.35	34	0.63	16	15,000	103
101NX-6-06	10	-06	3/8	9.5	3/8" - 18	2.79	71	1.20	30	0.87	22	15,000	103
101NX-8-08	12	-08	1/2	12.7	1/2" - 14	3.11	79	1.46	37	0.87	22	15,000	103
101NX-12-12	20	-12	3/4	19.0	3/4" - 14	3.66	93	1.57	40	1.06	27	10,000	69

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-48

NX Series Fittings

602NX- NPT Female

Material: Nipple - Carbon steel
Shell - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
602NX-4-4	6	-04	1/4	6.4	1/4" - 18	2.38	60	1.12	28	0.63	16	15,000	103

* Prolance

606NX- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
606NX-4-4C	6	-04	1/4	6.4	7/16" - 20	2.23	57	0.99	25	0.63	16	10,000	69
606NX-6-4C	6	-04	1/4	6.4	9/16" - 18	2.36	60	1.11	28	0.68	17	10,000	69

106NX- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
106NX-4-04	6	-04	1/4	6.4	7/16" - 20	2.56	65	1.37	35	0.75	19	10,000	69
106NX-6-04	6	-04	1/4	6.4	9/16" - 18	2.56	65	1.32	34	0.75	19	10,000	69
106NX-6-06	10	-06	3/8	9.5	9/16" - 18	2.56	65	1.32	34	0.75	19	10,000	69
106NX-8-06	10	-06	3/8	9.5	3/4" - 16	2.82	72	1.23	31	0.95	24	10,000	69
106NX-8-08	12	-08	1/2	12.7	3/4" - 16	2.52	64	0.83	21	1.06	27	10,000	69
106NX-12-12	20	-12	3/4	19.0	1-1/16" - 12	3.78	96	1.69	43	1.42	36	10,000	69
106NX-16-12	20	-12	3/4	19.0	1-5/16" - 12	3.66	93	1.57	40	1.61	41	10,000	69
106NX-16-16	25	-16	1	25.4	1-5/16" - 12	3.84	98	1.67	43	1.61	41	10,000	69
106NX-20-20	32	-20	1-1/4	31.8	1 5/8" - 12	4.09	104	1.73	44	1.97	50	6,380	44


NX Series Fittings

6AYNX- Type "M" Swivel - Female

Material: Nipple - Stainless steel

Shell - Stainless steel

Nut - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AYNX-6-4C	6	-04	1/4	6.4	9/16" - 18	2.36	60	1.11	28	0.68	17	--	--

*Fitting is rated to the full working pressure of the hose

6D9NX- BSP Rigid - Male

Material: Nipple - High strength steel



Shell - Carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6D9NX-8-8-PL	12	-08	1/2	12.7	G 1/2" - 14	2.50	64	1.00	25	1.26	32	--	--


*Fitting is rated to the full working pressure of the hose





PL Series Fittings

PL Series Crimp Fittings	01	NPT - Male	HY	Waterblast Nozzle - Female
				
	B-51		B-51	

601PL- NPT Male


Material: Nipple - Carbon steel
Shell - Carbon steel







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
601PL-1-2	3	-02	1/8	3.2	1/16" - 27	1.06	27	0.47	12	0.38	10	15,000	103

6HYPL- Waterblast Nozzle - Female




Material: Nipple - Carbon steel
Shell - Carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6HYPL-1-2	3	-02	1/8	3.2	#12 - 28	1.13	29	0.53	13	0.38	10	--	--

*Fitting is rated to the full working pressure of the hose


RX Series Reusable Fittings





RX Series Reusable Fittings	01	NPT - Male	06	JIC 37° Flare - Female	TU	Tube Stub Fitting
		B-52		B-52		B-53

201RX- NPT Male

Material: Nipple - Stainless steel

Shell - Stainless steel








Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
201RX-2-2C	3	-02	1/8	3.2	1/8" - 27	1.54	39	1.10	28	0.44	11	15,000	103

206RX- JIC 37° Female Flare

Material: Nipple - Stainless steel

Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
206RX-4-2C	3	-02	1/8	3.2	7/16" - 20	1.56	40	1.10	28	0.56	14	10,000	69

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-52

RX Series Reusable Fittings

2TURX- Tube Stub






Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
2TURX-4-2C	3	-02	1/8	3.2	1/4" TUBE	1.65	42	1.20	30	0.38	10	--	--


*Fitting is rated to the full working pressure of the hose





TX Series Fittings

TX Series Crimp Fittings	01	NPT - Male	02	NPT - Female	06	JIC 37° Flare - Female	AY	Type "M" Swivel - Female
								
	B-54		B-54		B-55		B-55	
	YH	Waterblast Nozzle - Male						
								
B-55								

101TX- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated







Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Wrench Flats		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
101TX-2-02W	3	-02	1/8	3.2	1/8"-27	1.73	44	0.87	22	0.38	10	15,000	103
101TX-1-025W	4	-025	5/32	4.0	1/16"-27	1.85	47	0.99	25	0.38	10	15,000	103
101TX-2-025	4	-025	5/32	4.0	1/8" - 27	1.93	49	1.06	27	0.38	10	15,000	103
101TX-4-025W	4	-025	5/32	4.0	1/4"-18	2.20	56	1.34	34	0.50	13	15,000	103
101TX-1-03	5	-03	3/16	4.8	1/16" - 27	2.13	54	1.06	27	0.38	10	15,000	103
101TX-2-03	5	-03	3/16	4.8	1/8" - 27	2.13	54	1.06	27	0.38	10	15,000	103
101TX-4-03	5	-03	3/16	4.8	1/4" - 18	2.40	61	1.35	34	0.53	13	15,000	103

102TX- NPT Female

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Wrench Flats		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
102TX-1-025	4	-025	5/32	4.0	1/16" - 27	1.77	45	0.95	24	0.47	12	15,000	103
102TX-2-03	5	-03	3/16	4.8	1/8" - 27	2.13	54	1.06	27	0.56	14	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-54

TX Series Fittings

106TX- JIC 37° Female Flare


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
106TX-4-02W	3	-02	1/8	3.2	9/16" - 18	1.57	40	0.83	21	0.68	17	10,000	69
106TX-4-025W	4	-025	5/32	4.0	9/16" - 18	1.73	44	0.83	21	0.68	17	10,000	69
106TX-6-03W	5	-03	3/16	4.8	9/16" - 18	1.89	48	0.99	25	0.75	19	10,000	69

1AYTX- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYTX-6-02W	3	-02	1/8	3.2	9/16"-18	1.85	47	1.10	28	0.75	19	--	--
1AYTX-6-025W	4	-025	5/32	4.0	9/16"-18	1.77	45	0.91	23	0.75	19	--	--
1AYTX-6-03W	5	-03	3/16	4.8	9/16"-18	1.97	50	0.91	23	0.75	19	--	--

*Fitting is rated to the full working pressure of the hose

1YHTX- Waterblast Nozzle - Male


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Wrench Flats		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1YHTX-4-025	4	-025	5/32	4.0	1/4" - 28	1.85	47	0.99	25	0.31	8	--	--
1YHTX-6-03	5	-03	3/16	4.8	3/8" - 24	2.13	54	1.06	27	0.44	11	--	--


*Fitting is rated to the full working pressure of the hose

UX Series Fittings

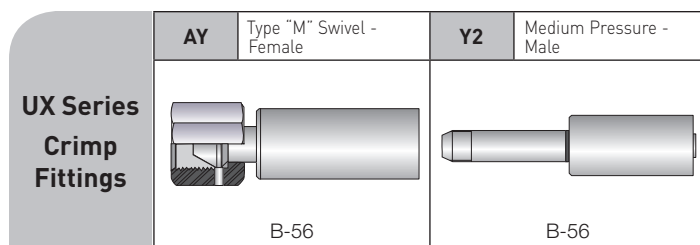

1AYUX- Type "M" Swivel - Female

Material: Nipple - Stainless steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1AYUX-6-04C	6	-04	1/4	6.4	9/16"-18	3.66	93	1.38	35	0.75	19	--	--
1AYUX-8-06C	10	-06	3/8	9.5	3/4"-16	3.94	100	1.39	35	1.06	27	--	--

*Fitting is rated to the full working pressure of the hose

1Y2UX- Medium Pressure - Male

Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
1Y2UX-6-04C	6	-04	1/4	6.4	3/8" - 24 LH	4.29	109	2.20	56	0.71	18	20,000	138
1Y2UX-9-06C	10	-06	3/8	9.5	9/16" - 18 LH	4.84	123	2.24	57	1.10	28	20,000	138

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-56

Hose
A

B Fittings




Adapters &
Valves
C

D Quick Couplings

E Accessories


F General Technical

WX/WX-55 Series Fittings

	Y4	YM	AY
	High Pressure - Male	Metric High Pressure - Male	Type "M" Swivel - Female
WX Series Crimp Fittings			
	B-57	B-57	B-57

6Y4WX- High Pressure - Male

Material: Nipple - Stainless steel
Shell - Stainless steel








Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y4WX-16-8C	25	-16	1	25.4	1" - 14 LH	5.4	138	3.2	80	1.34	34	--	--

*Fitting is rated to the full working pressure of the hose

6AYWX-x-55 - High Pressure - Male


Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		H Hex		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6AYWX-10-5C-55	8	-05	5/16	7.9	7/8" - 14	4.43	113	1.77	45	1.25	32	55,000	379.3

6Y4WX-x-55 - High Pressure - Male


Material: Nipple - Stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6Y4WX-9-5C-55	8	-05	5/16	7.9	9/16" - 18 LH	5.13	130	2.47	63	1.10	28	55,000	379.3





6YMWX-x-55 - High Pressure Male Metric

Material: Nipple - Stainless steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6YMWX-6-5C-55	8	-05	5/16	7.9	M14×1.5-LH	4.72	120	2.20	56	.985	25	55,000	379.3





Black Eagle Fittings

Black Eagle Crimp Fittings	01	NPT Male	HB	Hub Flange	HE	2" Hammer Union (Female) Cone Threaded	HN	2" Hammer Union (Male) Cone w/ Wing Nut
	 B-58		 B-58		 B-59		 B-61	

6015X- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Stainless steel





Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		R Diameter		Maximum Working Pressure	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6015X-32-24-TC	40	-24	1-1/2	38.1	2" - 11 1/2 NPT	9.09	231	4.21	107	3.35	85	5,000	34
6015X-32-32-TC	50	-32	2	50.8	2" - 11 1/2 NPT	9.61	244	4.22	107	3.25	83	5,000	34

6HB5X- Hub Flange

Material: Nipple - High strength stainless steel
Shell - Stainless steel



Part Number	Nominal I.D.				API Size	A Overall Length		B Cutoff Allowance		Seal		Maximum Working Pressure*	
#													
	DN	Size	inch	mm		inch	mm	inch	mm	inch	mm	psi	MPa
6HB5X-32-32-TC	50	-32	2	50.8	2-1/16" 5,000 PSI	10.18	259	4.68	119	--	BX152	5000	34
6HB5X-32-32C-TC-10K	50	-32	2	50.8	2-1/16" 10,000 PSI	10.70	272	5.30	135	--	BX152	--	--
6HB5X-32-32-TC-FLG	50	-32	2	50.8	2-1/16" 5,000 PSI	10.18	259	4.68	119	8.50	BX152	5000	34
6HB5X-32-32C-TC-FLG-10K	50	-32	2	50.8	2-1/16" 10,000 PSI	10.70	272	5.30	135	7.88	BX152	--	--
6HB5X-41-32-TC	50	-32	2	50.8	2-9/16" 5,000 PSI	10.18	259	4.68	119	--	BX153	5000	34
6HB5X-41-32-TC-FLG	50	-32	2	50.8	2-9/16" 5,000 PSI	10.18	259	4.68	119	9.62	BX153	5000	34

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-58

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D


Accessories
E

General Technical
F

Black Eagle Fittings

6HE5X- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - Carbon steel, zinc-plated
Shell - Stainless steel
Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
6HE5X-32-24-FLATTC	40	-24	1-1/2	38.1	4-1/8" - 3 ACME	9.13	232	4.25	108	--	--
6HE5X-32-32-FLATTC	50	-32	2	50.8	4-1/8" - 3 ACME	11.50	292	6.10	155	--	--
6HE5X-32-32-SEGTC	50	-32	2	50.8	4-1/8" - 3 ACME	11.73	298	6.34	161	--	--

*Fitting is rated to the full working pressure of the hose

1HE5X- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
COSK - High strength stainless steel
Shell - High strength stainless steel
Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HE5X-32-24COSK-FLAT	50	-32	2	50.8	4-1/8" - 3 ACME	8.37	213	4.64	118	--	--
1HE5X-32-24C4462-KOP2	50	-32	2	50.8	4-1/8" - 3 ACME	9.13	232	4.25	108	--	--
1HE5X-32-24C4462-FLATTC	50	-32	2	50.8	4-1/8" - 3 ACME	9.13	232	4.25	108	--	--
1HE5X-48-48	78	-48	3	76.0	4-1/8" - 3 ACME	15.55	395	7.24	184	--	--
1HE5X-48-48-FLAT	78	-48	3	76.0	4-1/8" - 3 ACME	15.55	395	7.22	183	--	--

*Fitting is rated to the full working pressure of the hose

1HECX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HECX-32-32-FLAT	50	-32	2	50.8	4-1/8" - 3 ACME	11.74	298	5.21	132	--	--

*Fitting is rated to the full working pressure of the hose

Black Eagle Fittings

1HELX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
Shell - High strength stainless steel
Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HELX-48-48	78	-48	3	76.0	5-3/8" - 3 1/2 ACME	15.55	395	7.52	191	--	--
1HELX-48-48-FLAT	78	-48	3	76.0	5-3/8" - 3 1/2 ACME	15.55	395	7.24	184	--	--

*Fitting is rated to the full working pressure of the hose

1HES6- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
Shell - High strength stainless steel
Nut - Carbon steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HES6-32-32-FLAT	50	-32	2	50.8	4-1/8" - 3 ACME	6.69	170	2.99	76	--	--
1HES6-32-32-FLAT-SC	50	-32	2	50.8	4-1/8" - 3 ACME	6.69	170	2.99	76	--	--

*Fitting is rated to the full working pressure of the hose

1HETX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
Shell - High strength stainless steel
Nut - Carbon steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HETX-48-48	78	-48	3	76.0	5-3/8" - 3 1/2 ACME	13.39	340	6.85	174	--	--
1HETX-48-48-FLAT	78	-48	3	76.0	5-3/8" - 3 1/2 ACME	13.39	340	6.85	174	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-60

Black Eagle Fittings

6HN5X- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - Stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
6HN5X-32-24-TC	40	-24	1-1/2	38.1	4 1/8" - 3 ACME	10.71	272	5.79	147	--	--
6HN5X-32-32-TC	50	-32	2	50.8	4 1/8" - 3 ACME	9.56	243	4.18	106	--	--

*Fitting is rated to the full working pressure of the hose

1HN5X- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HN5X-32-24C4462-KOP2	40	-24	1-1/2	38.1	4 1/8" - 3 ACME	9.65	245	4.25	108	--	--
1HN5X-32-24C4462-TC	40	-24	1-1/2	38.1	4 1/8" - 3 ACME	9.65	245	4.25	108	--	--
1HN5X-48-48	78	-48	3	76.0	5 3/8" - 3 1/2 ACME	15.95	405	7.64	194	--	--

*Fitting is rated to the full working pressure of the hose

1HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#											
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HNLX-48-48	78	-48	3	76.0	5 3/8" - 3 1/2 ACME	15.95	405	7.64	194	--	--

*Fitting is rated to the full working pressure of the hose

Black Eagle Fittings

1HNS6- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#	⊙				⋈					↗	
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HNS6-32-32	50	-32	2	50.8	4 1/8" - 3 ACME	6.69	170	2.99	76	--	--
1HNS6-32-32-SC	50	-32	2	50.8	4 1/8" - 3 ACME	6.69	170	2.99	76	--	--

*Fitting is rated to the full working pressure of the hose

1HNTX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#	⊙				⋈					↗	
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HNTX-48-48	78	-48	3	76.0	5-3/8" - 3 1/2 ACME	13.78	350	7.24	184	--	--

*Fitting is rated to the full working pressure of the hose

1HNCX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel



Part Number	Nominal I.D.				Thread Size	A Overall Length		B Cutoff Allowance		Maximum Working Pressure*	
#	⊙				⋈					↗	
	DN	Size	inch	mm		inch	mm	inch	mm	psi	MPa
1HNCX-32-32	50	-32	2	50.8	4-1/8" - 3 ACME	11.2	284	4.65	118	--	--

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-62

Hose
A

B Fittings


Adapters &
Valves
C

D Quick Couplings

E Accessories

F General Technical

Polyflex-Lok

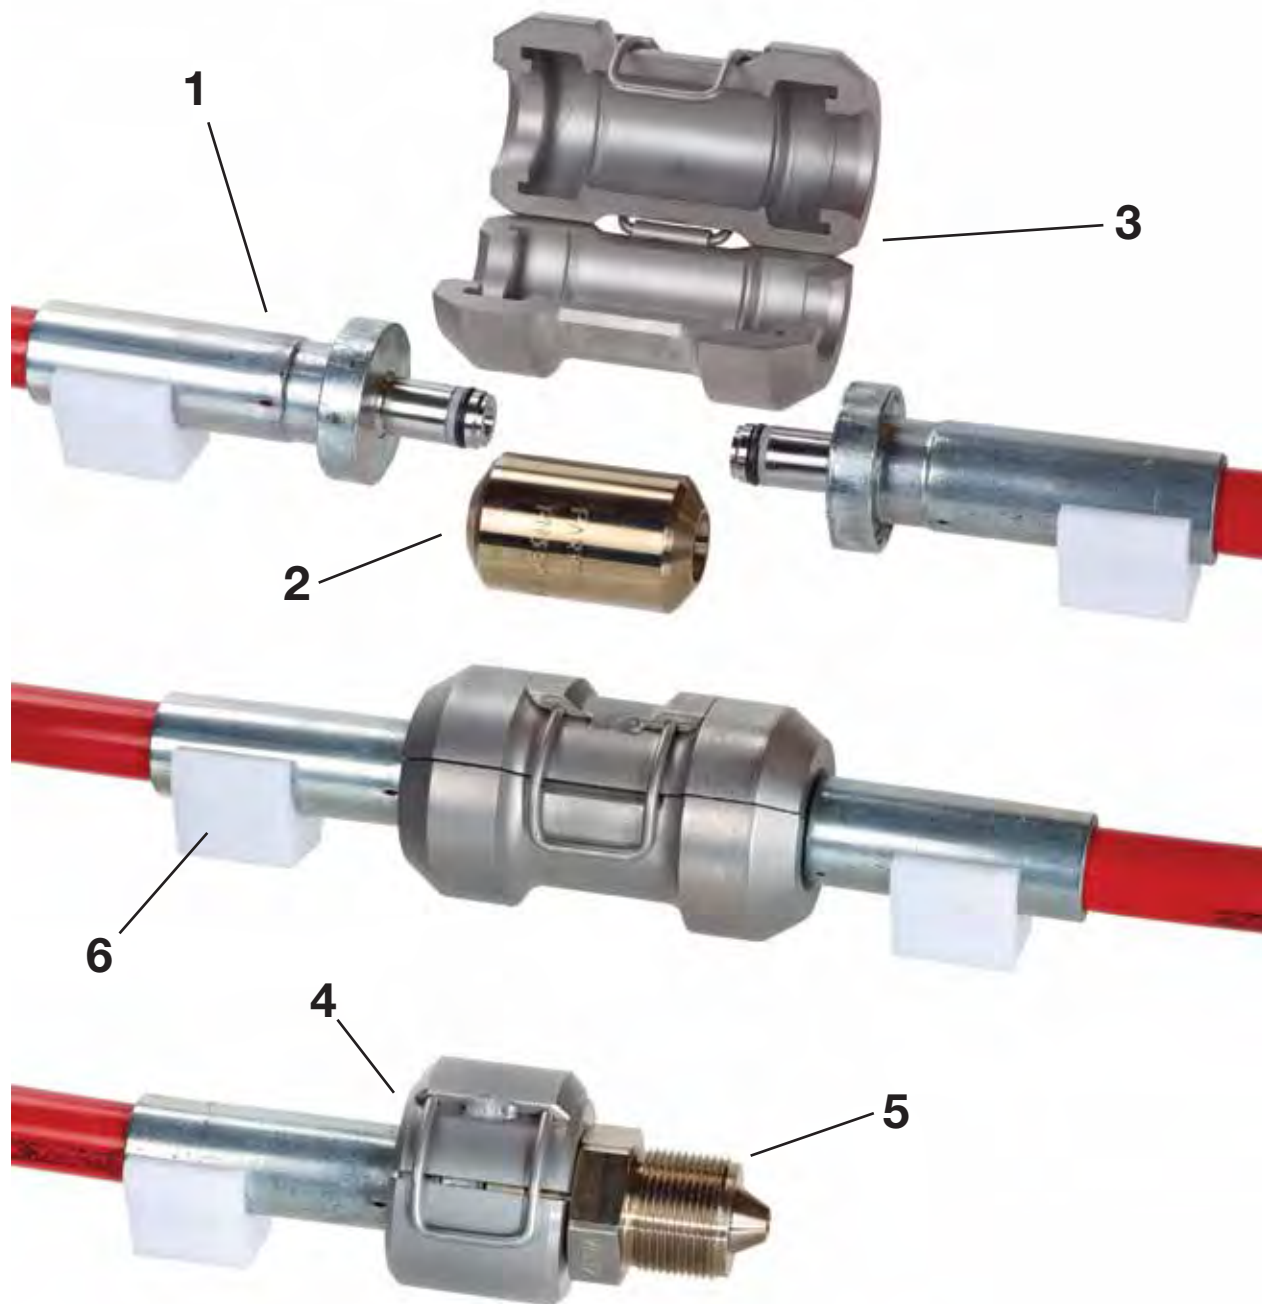

Polyflex-Lok

Ref	Part Number	Description
1	1TM2X-8-03-HPK	Fitting for DN 5 hoses including caps
	1TM2X-8-05-HPK	Fitting for DN 8 hoses including caps
	1TMKY-8-05-HPK	Fitting for DN 8 hoses including caps
	1TMBL-9-08-HPK	Fitting for DN 12 hoses including caps
	1TMBS-9-08-HPK	Fitting for DN 12 hoses including caps
Ref	Part Number	Description
2	TFTF-8-8	Hose connector bushing for DN 5 and DN 8
	TFTF-8-9	Hose connector bushing - connection DN 5 or DN 8 to DN 12
	TFTF-9-9	Hose connector bushing for DN 12
3	HPK-HS-8	Hose connector
4	HPK-HSP-8	Pump/gun connector
Ref	Part Number	Description
5	YTTF-6-8	Adapter M20 x 1.5 to DN 5 or DN 8
	YTTF-9-8	Adapter M26 x 1.5 to DN 5 or DN 8
	YTTF-9-9	Adapter M26 x 1.5 to DN 12
	YTTF-10-8	Adapter M30 x 2 to DN 5 or DN 8
	YTTF-10-9	Adapter M30 x 2 to DN 12
	YTTF-12-8	Adapter M42 x 2 to DN 5 or DN 8
	YTTF-12-9	Adapter M42 x 2 to DN 12
	Y6TF-6-8	Adapter 3/4 - 16UNF to DN 5 or DN 8
	Y6TF-9-8	Adapter 1 1/8 - 12UNF to DN 5 or DN 8
6	TMCAP-8	Cap DN 5 or DN 8
	TMCAP-9	Cap DN 12

For detailed ordering information, please consult price list or contact Parflex Division.

Notes

[illegible]

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Adapters & Valves



Type M Adapters

Medium Pressure Adapters

High Pressure Adapters

NPT Adapters

JIC Adapters

Medium Pressure Valves

High Pressure Valves



Table of Contents

Introduction

Adapter Nomenclature	C-3
----------------------------	-----

Adapters

Type M	C-6
YAYA	C-7
YAY6	C-7
YAY5	C-8
YAD9	C-8
Plugs, Caps and Torpedos	C-9
20,000 psi — Medium Pressure	C-10
5YY5	C-11
Y5Y5	C-12
6YY5	C-12
5YY6	C-13
Y5Y6	C-14
Y5D9	C-14
5Y5Y	C-15
5Y6Y	C-16
L5Y	C-17
T5Y	C-17
X5Y	C-17
Y2N	C-18
Y2C	C-18
Plugs	C-19
Caps	C-19
Nipples	C-19
30,000/60,000 psi — High Pressure	C-20
6YY6	C-21
Y6Y6	C-21
X6Y6	C-21
6Y6Y	C-22
Y6D9	C-22
L6Y	C-23
T6Y	C-23
X6Y	C-23
Y4N	C-24
Y4C	C-24
Plugs	C-24
Caps	C-25
Locking Anti-Vibration Nut and Collar	C-25
Nipples	C-25
NPT	C-26
K0101	C-27
K0201	C-28
K0202	C-29

Table of Contents

Adapters Continued

YA02	C-29
YA01	C-30
5Y01	C-31
02Y5	C-32
Y501	C-33
5Y02	C-34
6Y02	C-35
6Y01	C-36
Y601	C-37
02Y6	C-37
K0203	C-38
01D9	C-38
02D9	C-38
KL02	C-39
KT02	C-40
KX02	C-40
Caps	C-41
Plugs	C-41
JIC	C-42
K0303	C-43
K0306	C-43
K0606	C-43
YA03	C-44
Y503	C-44
Y603	C-44
Caps	C-45
Plugs	C-45

Valves

20,000 psi — Medium Pressure	C-46
SV5Y	C-47
AV5Y	C-47
TV25Y	C-47
TV15Y	C-48
CV5Y	C-48
30,000/60,000 psi — High Pressure	C-49
SV6Y	C-49
AV6Y	C-49
TV26Y	C-49
TV16Y	C-50
CV6Y	C-50

Adapter Nomenclature

Adapter Part Numbers

Most adapter part number structures will follow the below examples.

Example: YA01-11-8C

YA01-11-8C – **Connection Type #1** (YA = Male Type M)
YA**01**-11-8C – **Connection Type #2** (01 = Male NPT)
YA01-**11**-8C – **Connection Size #1** (11 = 1" - 12 thread size for the Type M connection)
YA01-11-**8C** – **Connection Size #2** (8 = 1/2" - 14 thread size for the NPT connection)
YA01-11-8**C** – **Material** (316 Stainless Steel)

Example: 15K0101-4-4C

15K0101-4-4C – **Pressure Rating** (15K = 15,000 psi)
15K**01**01-4-4C – **Connection Type #1** (01 = Male NPT)
15K01**01**-4-4C – **Connection Type #2** (01 = Male NPT)
15K0101-**4**-4C – **Connection Size #1** (4 = 1/4" -18)
15K0101-4-**4C** – **Connection Size #2** (4 = 1/4" -18)
15K0101-4-4**C** – **Material** (316 Stainless Steel)

Connection Type Designations - The choice of connection type may limit the working pressure of the adapter (i.e., a High Pressure to Type M adapter will be limited to Type M pressures).

YA	Male, Type M	Y4	Male, High Pressure, Tube Type
AY	Female, Type M	01	Male NPT Pipe, Rigid, Straight
Y5	Male, Medium Pressure, Rigid Straight	02	Female NPT Pipe
5Y	Female, Medium Pressure, Rigid Straight	03	Male JIC
Y2	Male, Medium Pressure, Torpedo Type	06	Female JIC
Y6	Male, High Pressure, Rigid Straight	X6	Low Angle Face Seal
6Y	Female, High Pressure, Rigid Straight	D9	Male BSP

Connection/Thread Size

NPT Connections		JIC Connections		Type "M" Connections	
2	1/8" - 27	4	7/16" - 20 UNF	6	9/16" - 18 UNF
4	1/4" - 18	6	9/16" - 18 UNF	8	3/4" - 16 UNF
6	3/8" - 18	8	3/4" - 16 UNF	10	7/8" - 14 UNF
8	1/2" - 14	10	7/8" - 14 UNF	11	1" - 12 UNF
12	3/4" - 14	12	1-1/16" - 12 UNF	16	1-5/16" - 12 UNF
16	1" - 11-1/2	16	1-5/16" - 12 UNF		

Medium & High Pressure Connections - measured by tube O.D.

		Medium Pressure	High Pressure
4	1/4" Tube O.D.	7/16" - 20 UNF	9/16" - 18 UNF
6	3/8" Tube O.D.	9/16" - 18 UNF	3/4" - 16 UNF
9	9/16" Tube O.D.	13/16" - 16 UNF	1-1/8" - 12 UNF
12	3/4" Tube O.D.	3/4" - 14 NPS	
16	1" Tube O.D.	1-3/8" - 12 UNF	

Adapter Nomenclature

Connection Accessory Part Numbers — Crosses, Elbows and Tees

Connection accessories include crosses, elbows and tees. Part numbers for these accessories will always begin with a one-letter code (X, L or T) designating the accessory type, followed by a two-digit code representing the connection type. The connection size and material make up the end of the part number.

Example: L-6Y-9C

L-6Y-9C – **Accessory Type** (L = Elbow)
L-6Y-9C – **Connection Type** (6Y = Female high pressure connection)
L-6Y-9C – **Connection Size** (9 = 1-1/8" - 12 UNF thread size)
L-6Y-9C – **Material** (316 Stainless Steel)

Accessory Type	
X	Code given for Crosses
L	Code given for Elbows
T	Code given for Tees

Connection Type	
02	Female NPT Connection
5Y	Female Medium Pressure connection
6Y	Female High Pressure connections

Connection/Thread Size					
NPT Connections		Medium & High Pressure Connections - measured by tube O.D.			
				Medium Pressure	High Pressure
2	1/8" - 27	4	1/4" Tube O.D.	7/16" - 20 UNF	9/16" - 18 UNF
4	1/4" - 18	6	3/8" Tube O.D.	9/16" - 18 UNF	3/4" - 16 UNF
6	3/8" - 18	9	9/16" Tube O.D.	13/16" - 16 UNF	1-1/8" - 12 UNF
8	1/2" - 14	12	3/4" Tube O.D.	3/4" - 14 NPS	
12	3/4" - 14	16	1" Tube O.D.	1-3/8" - 12 UNF	
16	1" - 11-1/2				

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-4

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Adapter Nomenclature

Connection Accessory Part Numbers — Gland Nuts and Collars

Gland nuts and collars are simple in their make-up. Unlike crosses, elbows and tees, the gland nut and collar part numbers begin with the connection type followed by a one-letter code identifying the part as a gland nut or collar. The connection size and material codes make up the end of the part number.

Example: Y4N-6C

Y4N-6C – **Connection Type** (Y4 = High Pressure)

Y4**N**-6C – **Accessory Type** (N = Gland Nut)

Y4N-**6C** – **Connection Size** (6 = 3/8")

Y4N-6**C** – **Material** (316 Stainless Steel)

Connection Type	
Y2	Medium Pressure Connection
Y4	High Pressure Connection

Accessory Type	
N	Gland Nuts
C	Collars

Connection/Thread Size			
4	1/4" Tube O.D.	7/16" - 20 UNF	9/16" - 18 UNF
6	3/8" Tube O.D.	9/16" - 18 UNF	3/4" - 16 UNF
9	9/16" Tube O.D.	13/16" - 16 UNF	1-1/8" - 12 UNF
12	3/4" Tube O.D.	3/4" - 14 NPS	
16	1" Tube O.D.	1-3/8" - 12 UNF	

Connection Accessory Part Numbers — Threaded Tube Nipples

Example: Y406-0800C

Y406-0800C – **Connection Type** (Y4 = High Pressure)

Y4**06**-0800C – **Tube Size** (06 = 3/8")

Y406-**0800C** – **Tube Length** (6 = 3/8")

Y406-0800**C** – **Material** (316 Stainless Steel)

Connection Type	
Y2	Medium Pressure Connection
Y4	High Pressure Connection

Tube Size	
04	1/4"
06	3/8"
09	9/16"

Tube Length	
0300	3" in length
0400	4" in length
0600	6" in length
0800	8" in length
1000	10" in length
Length = distance between tips of each cone	

Type “M” Swivel Hose Fitting and Adapters



The Type “M” Swivel End Fitting is a swivel nut fitting with a 58° male cone nipple. Each Type “M” Swivel End Fitting is **rated for the full working pressure of the hose**.

Advantages:

- Rated for the full working pressure of the hose
- Provides a swivel for quick and easy connection
- Internal threads and seal are protected from external damage
- Non-rotating seal reduces galling and minimizes tightening torque
- Can be adapted to almost any connection required

Thread Sizes:

- 9/16" - 18 UNF
- 3/4" - 16 UNF
- 7/8" - 14 UNF
- 1" - 12 UNF
- 1-5/16" - 12 UNF

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-6


Type "M" Swivel Hose Fitting Adapters

YAYA — Male Type "M" x Male Type "M"



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
YAYA-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.38	35.05	0.63	16.00	60,000	414
YAYA-8-6C	3/4" - 16 UNF	9/16" - 18 UNF	1.63	41.40	0.75	19.05	30,000	207
YAYA-8-8C	3/4" - 16 UNF	3/4" - 16 UNF	1.75	44.45	0.75	19.05	30,000	207
YAYA-10-6C	7/8" - 14 UNF	9/16" - 18 UNF	1.88	47.75	1.00	25.40	60,000	414
YAYA-10-10C	7/8" - 14 UNF	7/8" - 14 UNF	2.00	50.80	1.00	25.40	60,000	414
YAYA-11-8C	1" - 12 UNF	3/4" - 16 UNF	1.88	47.75	1.00	25.40	30,000	207
YAYA-11-10C	1" - 12 UNF	7/8" 14 UNF	1.98	50.29	1.00	25.40	30,000	207
YAYA-11-11C	1" - 12 UNF	1" - 12 UNF	1.88	47.75	1.00	25.40	30,000	207
YAYA-16-11C	1-5/16" - 12 UNF	1-5/16" - 12 UNF	2.13	54.10	1.38	35.05	20,000	138
YAYA-16-16C	1-5/16" - 12 UNF	1-5/16" - 12 UNF	2.13	54.10	1.38	35.05	20,000	138


YAY6 — Male Type "M" x Male High Pressure



Part Number	T1 Thread Size	T2 Thread Size	Nominal Tube Size	A Overall Length		H Hex		Max. Working Pressure	
#									
				inch	mm	inch	mm	psi	MPa
YAY6-6-4C	9/16" - 18 UNF	9/16" - 18 UNF	1/4" H.P.	1.53	38.86	0.63	16.00	60,000	414
YAY6-6-6C	9/16" - 18 UNF	3/4" - 16 UNF	3/8" H.P.	1.75	44.45	0.75	19.05	60,000	414
YAY6-6-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	9/16" H.P.	2.00	50.80	1.13	28.70	60,000	414
YAY6-8-6C	3/4" - 16 UNF	3/4" - 16 UNF	3/8" H.P.	2.00	50.80	0.75	19.05	30,000	207
YAY6-8-9C	3/4" - 16 UNF	1-1/8" - 12 UNF	9/16" H.P.	2.25	57.15	1.13	28.70	30,000	207
YAY6-10-6C	7/8" - 14 UNF	3/4" - 16 UNF	3/8" H.P.	2.25	57.15	1.00	25.40	60,000	414
YAY6-10-9C	7/8" - 14 UNF	1-1/8" - 12 UNF	9/16" H.P.	2.38	60.45	1.13	28.70	60,000	414
YAY6-11-9C	1" - 12 UNF	1-1/8" - 12 UNF	9/16" H.P.	2.25	57.15	1.13	28.70	30,000	207


Type “M” Swivel Hose Fitting Adapters

YAY5 — Male T type “M” x Male Medium Pressure



Part Number	T1 Thread Size	T2 Thread Size	Nominal Tube Size	A Overall Length		H Hex		Max. Working Pressure	
#				inch	mm	inch	mm	psi	MPa
YAY5-6-4C	9/16" - 18 UNF	7/16" - 20 UNF	1/4" M.P.	1.56	39.62	0.63	16.00	20,000	138
YAY5-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	3/8" M.P.	1.63	41.40	0.63	16.00	20,000	138
YAY5-6-9C	9/16" - 18 UNF	13/16" - 16 UNF	9/16" M.P.	2.00	50.80	0.88	22.35	20,000	138
YAY5-6-12C	9/16" - 18 UNF	3/4" - 14 NPS	3/4" M.P.	2.32	58.93	1.13	28.70	20,000	138
YAY5-8-4C	3/4" - 16 UNF	7/16" - 20 UNF	1/4" M.P.	1.68	42.67	0.75	19.05	20,000	138
YAY5-8-6C	3/4" - 16 UNF	9/16" - 18 UNF	3/8" M.P.	1.88	47.75	0.75	19.05	20,000	138
YAY5-8-9C	3/4" - 16 UNF	13/16" - 16 UNF	9/16" M.P.	2.20	55.88	0.88	22.35	20,000	138
YAY5-8-12C	3/4" - 16 UNF	3/4" - 14 NPS	3/4" M.P.	2.44	61.98	1.13	28.70	20,000	138
YAY5-11-4C	1" - 12 UNF	7/16" - 20 UNF	1/4" M.P.	1.94	49.28	1.00	25.40	20,000	138
YAY5-11-6C	1" - 12 UNF	9/16" - 18 UNF	3/8" M.P.	2.00	50.80	1.00	25.40	20,000	138
YAY5-11-9C	1" - 12 UNF	13/16" - 16 UNF	9/16" M.P.	2.25	57.15	1.00	25.40	20,000	138
YAY5-11-12C	1" - 12 UNF	3/4" - 14 NPS	3/4" M.P.	2.44	61.98	1.13	28.70	20,000	138
YAY5-16-9C	1-5/16" - 12 UNF	9/16" - 18 UNF	9/16" M.P.	2.50	63.50	1.38	35.05	20,000	138
YAY5-16-12C	1-5/16" - 12 UNF	13/16" - 16 UNF	3/4" M.P.	2.70	68.58	1.38	35.05	20,000	138

YAD9 — Male Type “M” x Male BSP




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#			inch	mm	inch	mm	psi	MPa
YAD9-6-4C	9/16" - 18 UNF	G 1/4" - 19	1.36	34.54	0.75	19.05	30,000	207
YAD9-6-6C*	9/16" - 18 UNF	G 3/8" - 19	1.36	34.54	0.875	22.23	30,000	207
YAD9-6-8C*	9/16" - 18 UNF	G 1/2" - 14	1.54	39.12	1.00	25.40	30,000	207

*Non-standard part - may require longer lead time


Type "M" Swivel Hose Fitting Adapters

Plugs




Part Number	T1 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
YA6C-PLUG	9/16" - 18 UNF	2.07	52.58	0.75	19.05	60,000	414
YA8C-PLUG	3/4" - 16 UNF	2.13	54.10	1.00	25.40	30,000	207
YA11C-PLUG	1" - 12 UNF	1.25	31.75	1.00	25.40	30,000	207
YA16C-PLUG	1-5/16" - 12 UNF	2.63	66.80	1.38	35.05	20,000	138

Caps



Part Number	T1 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
AY6C-CAP	9/16" - 18 UNF	0.85	21.59	0.69	17.53	60,000	414
AY8C-CAP	3/4" - 16 UNF	0.91	23.11	1.00	25.40	30,000	207
AY11C-CAP	1" - 12 UNF	1.31	33.27	1.25	31.75	30,000	207
AY16C-CAP	1-5/16" - 12 UNF	1.20	30.48	1.50	38.10	20,000	138

Torpedos



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
YAY1-8-16C	3/4" - 16 UNF	1" - 14 LH	3.56	90.42	1.13	28.70	20,000	138
YAY2-8-16C	3/4" - 16 UNF	1" - 14 LH	3.56	90.42	1.38	35.05	20,000	138
YAY1-11-16C	1" - 12 UNF	1" - 14 LH	3.56	90.42	1.13	28.70	20,000	138
YAY2-11-16C	1" - 12 UNF	1" - 14 LH	3.56	90.42	1.38	35.05	20,000	138
YAY1-16-16C	1-5/16" - 12 UNF	1" - 14 LH	3.70	93.98	1.38	35.05	20,000	138
YAY2-16-16C	1-5/16" - 12 UNF	1" - 14 LH	3.70	93.98	1.38	35.05	20,000	138

Medium Pressure Adapters



Medium Pressure is a 58/60 degree coned and threaded tubing design. They have a **maximum working pressure rating of 20,000 psi.**

Advantages:

- An industry standard for use at elevated pressures
- Large orifice allows maximum flow of liquids and gases
- Suitable for repetitive assembly and disassembly

Thread Sizes (determined by tubing O.D.):

- 1/4" O.D. x 0.109" I.D. — 7/16" - 20 male thread on gland nut
- 3/8" O.D. x 0.19" I.D. — 9/16" - 18 male thread on gland nut
- 9/16" O.D. x 0.31" I.D. — 13/16" - 16 male thread on gland nut
- 3/4" O.D. x 0.44" I.D. — 3/4" - National Pipe Straight male on gland nut
- 1" O.D. x 0.56" I.D. — 1-3/8" - 12 male thread on gland nut

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-10

Medium Pressure Adapters

5YY5 — Female Medium Pressure x Male Medium Pressure




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5YY5-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
5YY5-4-9C	7/16" - 20 UNF	13/16" - 16 UNF	1.87	47.50	0.87	22.10	20,000	138
5YY5-4-12C	7/16" - 20 UNF	3/4" - 14 NPS	2.00	50.80	1.12	28.45	20,000	138
5YY5-4-16C	7/16" - 20 UNF	1-3/8" - 12 UNF	3.00	76.20	1.00	25.40	20,000	138
5YY5-6-4C	9/16" - 18 UNF	7/16" - 20 UNF	1.75	44.45	0.75	19.05	20,000	138
5YY5-6-9C	9/16" - 18 UNF	13/16" - 16 UNF	1.87	47.50	0.87	22.10	20,000	138
5YY5-6-12C	9/16" - 18 UNF	3/4" - 14 NPS	2.00	50.80	1.12	28.45	20,000	138
5YY5-6-16C*	9/16" - 18 UNF	1-3/8" - 12 UNF	3.12	79.25	1.00	25.40	20,000	138
5YY5-9-4C	13/16" - 16 UNF	7/16" - 20 UNF	2.12	53.85	1.00	25.40	20,000	138
5YY5-9-6C	13/16" - 16 UNF	9/16" - 18 UNF	2.12	53.85	1.00	25.40	20,000	138
5YY5-9-12C	13/16" - 16 UNF	9/16" - 18 UNF	2.50	63.50	1.12	28.45	20,000	138
5YY5-9-16C	13/16" - 16 UNF	1-3/8" - 12 UNF	3.37	85.60	1.00	25.40	20,000	138
5YY5-12-4C*	3/4" - 14 NPS	7/16" - 20 UNF	1.25	31.75	1.37	34.80	20,000	138
5YY5-12-6C	3/4" - 14 NPS	9/16" - 18 UNF	2.37	60.20	1.37	34.80	20,000	138
5YY5-12-9C	3/4" - 14 NPS	13/16" - 16 UNF	2.87	72.90	1.37	34.80	20,000	138
5YY5-12-16C	3/4" - 14 NPS	1-3/8" - 12 UNF	3.75	95.25	1.37	34.80	20,000	138
5YY5-16-4C	1-3/8" - 12 UNF	7/16" - 20 UNF	2.75	69.85	1.75	44.45	20,000	138
5YY5-16-6C	1-3/8" - 12 UNF	9/16" - 18 UNF	2.87	72.90	1.75	44.45	20,000	138
5YY5-16-9C	1-3/8" - 12 UNF	13/16" - 16 UNF	3.00	76.20	1.75	44.45	20,000	138
5YY5-16-12C	1-3/8" - 12 UNF	3/4" - 14 NPS	3.25	82.55	1.75	44.45	20,000	138

*Non-standard part - may require longer lead time


Medium Pressure Adapters

Y5Y5 — Male Medium Pressure x Male Medium Pressure



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y5Y5-4-4C	7/16" - 20 UNF	7/16" - 20 UNF	2.00	50.80	0.62	15.75	20,000	138
Y5Y5-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	2.12	53.85	0.75	19.05	20,000	138
Y5Y5-4-9C	7/16" - 20 UNF	13/16" - 16 UNF	2.18	55.37	0.875	22.23	20,000	138
Y5Y5-4-12C	7/16" - 20 UNF	3/4" - 14 NPS	2.50	63.50	1.12	28.45	20,000	138
Y5Y5-4-16C	7/16" - 20 UNF	1-3/8" - 12 UNF	3.62	91.95	1.00	25.40	20,000	138
Y5Y5-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	2.25	57.15	0.75	19.05	20,000	138
Y5Y5-6-9C	9/16" - 18 UNF	13/16" - 16 UNF	2.50	63.50	0.87	22.10	20,000	138
Y5Y5-6-12C	9/16" - 18 UNF	3/4" - 14 NPS	2.62	66.55	1.12	28.45	20,000	138
Y5Y5-6-16C	9/16" - 18 UNF	1-3/8" - 12 UNF	3.75	95.25	1.00	25.40	20,000	138
Y5Y5-9-9C	13/16" - 16 UNF	13/16" - 16 UNF	2.50	63.50	1.00	25.40	20,000	138
Y5Y5-9-12C	13/16" - 16 UNF	3/4" - 14 NPS	2.87	72.90	1.12	28.45	20,000	138
Y5Y5-9-16C	13/16" - 16 UNF	1-3/8" - 12 UNF	4.00	101.60	1.00	25.40	20,000	138
Y5Y5-12-12C	3/4" - 14 NPS	3/4" - 14 NPS	3.00	76.20	1.12	28.45	20,000	138
Y5Y5-12-16C	3/4" - 14 NPS	1-3/8" - 12 UNF	1.25	31.75	1.12	28.45	20,000	138
Y5Y5-16-16C	1-3/8" - 12 UNF	1-3/8" - 12 UNF	4.25	107.95	1.375	34.93	20,000	138

6YY5 — Female High Pressure x Male Medium Pressure



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6YY5-4-4C	9/16" - 18 UNF	7/16" - 20 UNF	1.75	44.45	0.75	19.05	20,000	138
6YY5-4-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
6YY5-4-9C	9/16" - 18 UNF	13/16" - 16 UNF	1.87	47.50	0.87	22.10	20,000	138
6YY5-4-12C*	9/16" - 18 UNF	3/4" - 14 NPS	2.25	57.15	1.12	28.45	20,000	138
6YY5-4-16C	9/16" - 18 UNF	1-3/8" - 12 UNF	3.00	76.20	1.00	25.40	20,000	138
6YY5-6-4C	3/4" - 16 UNF	7/16" - 20 UNF	1.87	47.50	1.00	25.40	20,000	138
6YY5-6-6C	3/4" - 16 UNF	9/16" - 18 UNF	1.87	47.50	1.00	25.40	20,000	138
6YY5-6-9C*	3/4" - 16 UNF	13/16" - 16 UNF	2.00	50.80	1.00	25.40	20,000	138
6YY5-6-12C	3/4" - 16 UNF	3/4" - 14 NPS	2.25	57.15	1.12	28.45	20,000	138
6YY5-6-16C	3/4" - 16 UNF	1-3/8" - 12 UNF	3.25	82.55	1.00	25.40	20,000	138
6YY5-9-4C	1-1/8" - 12 UNF	7/16" - 20 UNF	2.12	53.85	1.37	34.80	20,000	138
6YY5-9-6C*	1-1/8" - 12 UNF	9/16" - 18 UNF	2.12	53.85	1.37	34.80	20,000	138
6YY5-9-9C	1-1/8" - 12 UNF	13/16" - 16 UNF	2.37	60.20	1.37	34.80	20,000	138
6YY5-9-12C	1-1/8" - 12 UNF	3/4" - 14 NPS	2.50	63.50	1.37	34.80	20,000	138
6YY5-9-16C	1-1/8" - 12 UNF	1-3/8" - 12 UNF	3.62	91.95	1.37	34.80	20,000	138

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-12

Hose
A

Fittings
B

Adapters & Valves
C


Quick Couplings
D

Accessories
E

General Technical
F

Medium Pressure Adapters

5YY6 — Female Medium Pressure x Male High Pressure




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5YY6-4-4C	7/16" - 20 UNF	9/16" - 18 UNF	1.37	34.80	0.75	19.05	20,000	138
5YY6-4-6C	7/16" - 20 UNF	3/4" - 16 UNF	1.75	44.45	0.75	19.05	20,000	138
5YY6-4-9C	7/16" - 20 UNF	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	20,000	138
5YY6-6-4C	9/16" - 18 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
5YY6-6-6C	9/16" - 18 UNF	3/4" - 16 UNF	1.75	44.45	0.75	19.05	20,000	138
5YY6-6-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	20,000	138
5YY6-9-4C	13/16" - 16 UNF	9/16" - 18 UNF	1.87	47.50	1.00	25.40	20,000	138
5YY6-9-6C	13/16" - 16 UNF	3/4" - 16 UNF	2.12	53.85	1.00	25.40	20,000	138
5YY6-9-9C	13/16" - 16 UNF	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	20,000	138
5YY6-12-4C	3/4" - 14 NPS	9/16" - 18 UNF	2.50	63.50	1.37	34.80	20,000	138
5YY6-12-6C	3/4" - 14 NPS	3/4" - 16 UNF	2.37	60.20	1.37	34.80	20,000	138
5YY6-12-9C	3/4" - 14 NPS	1-1/8" - 12 UNF	2.62	66.55	1.37	34.80	20,000	138
5YY6-16-4C*	1-3/8" - 12 UNF	9/16" - 18 UNF	2.62	66.55	1.75	44.45	20,000	138
5YY6-16-6C*	1-3/8" - 12 UNF	3/4" - 16 UNF	2.87	72.90	1.75	44.45	20,000	138
5YY6-16-9C	1-3/8" - 12 UNF	1-1/8" - 12 UNF	3.12	79.25	1.75	44.45	20,000	138

*Non-standard part - may require longer lead time

Medium Pressure Adapters


Y5Y6 — Male Medium Pressure x Male High Pressure



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y5Y6-4-4C	7/16" - 20 UNF	9/16" - 18 UNF	1.73	43.94	0.63	16.00	20,000	138
Y5Y6-4-6C	7/16" - 20 UNF	3/4" - 16 UNF	2.10	53.34	0.75	19.05	20,000	138
Y5Y6-4-9C	7/16" - 20 UNF	1-1/8" - 12 UNF	2.37	60.20	1.12	28.45	20,000	138
Y5Y6-6-4C	9/16" - 18 UNF	9/16" - 18 UNF	2.12	53.85	0.62	15.75	20,000	138
Y5Y6-6-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	2.50	63.50	1.12	28.45	20,000	138
Y5Y6-9-4C	13/16" - 16 UNF	9/16" - 18 UNF	2.25	57.15	0.87	22.10	20,000	138
Y5Y6-9-6C	13/16" - 16 UNF	3/4" - 16 UNF	2.38	60.45	0.875	22.23	20,000	138
Y5Y6-9-9C	13/16" - 16 UNF	1-1/8" - 12 UNF	2.62	66.55	1.12	28.45	20,000	138
Y5Y6-12-4C	3/4" - 14 NPS	9/16" - 18 UNF	2.62	66.55	1.12	28.45	20,000	138
Y5Y5-12-6C*	3/4" - 14 NPS	3/4" - 16 UNF	2.75	69.85	1.12	28.45	20,000	138
Y5Y6-12-9C	3/4" - 14 NPS	1-1/8" - 12 UNF	3.00	76.20	1.12	28.45	20,000	138
Y5Y6-16-4C*	1-3/8" - 12 UNF	9/16" - 18 UNF	3.62	91.95	1.00	25.40	20,000	138
Y5Y6-16-6C*	1-3/8" - 12 UNF	3/4" - 16 UNF	4.00	101.60	1.00	25.40	20,000	138
Y5Y6-16-9C	1-3/8" - 12 UNF	1-1/8" - 12 UNF	4.00	101.60	1.12	28.45	20,000	138

*Non-standard part - may require longer lead time

Y5D9 — Male Medium Pressure x Male BSP




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y5D9-4-4C	7/16" - 20 UNF	G1/4 - 19	1.47	37.34	0.75	19.05	20,000	138
Y5D9-6-4C	9/16" - 18 UNF	G1/4 - 19	1.69	42.93	0.75	19.05	20,000	138
Y5D9-6-6C	9/16" - 18 UNF	G3/8 - 19	1.66	42.16	0.875	22.23	20,000	138
Y5D9-9-6C	13/16" - 16 UNF	G3/8 - 19	1.88	47.75	0.875	22.23	20,000	138

For detailed ordering information, please consult price list or contact Parflex Division.


Medium Pressure Adapters

5Y5Y — Female Medium Pressure, Straight Coupling



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5Y5Y-4-4C	7/16" - 20 UNF	7/16" - 20 UNF	1.62	41.15	0.75	19.05	20,000	138
5Y5Y-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
5Y5Y-9-9C	13/16" - 16 UNF	13/16" - 16 UNF	2.12	53.85	1.00	25.40	20,000	138
5Y5Y-12-12C	3/4" - 14 NPS	3/4" - 14 NPS	2.50	63.50	1.37	34.80	20,000	138
5Y5Y-16-16C	1-3/8" - 12 UNF	1-3/8" - 12 UNF	3.50	88.90	1.75	44.45	20,000	138

5Y5Y — Female Medium Pressure, Reducer Coupling








Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5Y5Y-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
5Y5Y-4-9C	7/16" - 20 UNF	13/16" - 16 UNF	2.12	53.85	1.00	25.40	20,000	138
5Y5Y-4-12C*	7/16" - 20 UNF	3/4" - 14 NPS	2.50	63.50	1.37	34.80	20,000	138
5Y5Y-4-16C	7/16" - 20 UNF	1-3/8" - 12 UNF	3.50	88.90	1.75	44.45	20,000	138
5Y5Y-6-9C	9/16" - 18 UNF	13/16" - 16 UNF	2.12	53.85	1.00	25.40	20,000	138
5Y5Y-6-12C	9/16" - 18 UNF	3/4" - 14 NPS	2.50	63.50	1.37	34.80	20,000	138
5Y5Y-6-16C	9/16" - 18 UNF	1-3/8" - 12 UNF	3.50	88.90	1.75	44.45	20,000	138
5Y5Y-9-12C	13/16" - 16 UNF	3/4" - 14 NPS	2.50	63.50	1.37	34.80	20,000	138
5Y5Y-9-16C	13/16" - 16 UNF	1-3/8" - 12 UNF	3.50	88.90	1.75	44.45	20,000	138
5Y5Y-12-16C	3/4" - 14 NPS	1-3/8" - 12 UNF	3.50	88.90	1.75	44.45	20,000	138

*Non-standard part - may require longer lead time

Medium Pressure Adapters

5Y6Y — Female Medium Pressure x Female High Pressure Coupling






Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5Y6Y-4-4C	7/16" - 20 UNF	9/16" - 18 UNF	1.62	41.15	0.75	19.05	20,000	138
5Y6Y-4-6C	7/16" - 20 UNF	3/4" - 16 UNF	1.87	47.50	1.00	25.40	20,000	138
5Y6Y-4-9C*	7/16" - 20 UNF	1-1/8" - 12 UNF	2.37	60.20	1.37	34.80	20,000	138
5Y6Y-6-4C	9/16" - 18 UNF	9/16" - 18 UNF	1.75	44.45	0.75	19.05	20,000	138
5Y6Y-6-6C	9/16" - 18 UNF	3/4" - 16 UNF	1.87	47.50	1.00	25.40	20,000	138
5Y6Y-6-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	2.37	60.20	1.37	34.80	20,000	138
5Y6Y-9-4C	13/16" - 16 UNF	9/16" - 18 UNF	2.12	53.85	1.00	25.40	20,000	138
5Y6Y-9-6C	13/16" - 16 UNF	3/4" - 16 UNF	2.37	60.20	1.00	25.40	20,000	138
5Y6Y-9-9C	13/16" - 16 UNF	1-1/8" - 12 UNF	1.75	44.45	1.37	34.80	20,000	138
5Y6Y-12-4C	3/4" - 14 NPS	9/16" - 18 UNF	2.50	63.50	1.37	34.80	20,000	138
5Y6Y-12-6C*	3/4" - 14 NPS	3/4" - 16 UNF	2.50	63.50	1.37	34.80	20,000	138
5Y6Y-12-9C	3/4" - 14 NPS	1-1/8" - 12 UNF	2.50	63.50	1.37	34.80	20,000	138
5Y6Y-16-4C	1-3/8" - 12 UNF	9/16" - 18 UNF	3.50	88.90	1.37	34.80	20,000	138
5Y6Y-16-6C*	1-3/8" - 12 UNF	3/4" - 16 UNF	3.50	88.90	1.37	34.80	20,000	138
5Y6Y-16-9C	1-3/8" - 12 UNF	1-1/8" - 12 UNF	3.50	88.90	1.37	34.80	20,000	138

*Non-standard part - may require longer lead time


Medium Pressure Adapters



L5Y — Medium Pressure Elbow




Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
L5Y-4C	7/16" - 20 UNF	0.75	1.18	29.97	1.00	25.40	0.87	22.10	0.68	17.27	20,000	138
L5Y-6C	9/16" - 18 UNF	0.75	1.37	34.80	1.37	34.80	1.00	25.40	1.00	25.40	20,000	138
L5Y-9C	13/16" - 16 UNF	1.00	1.75	44.45	1.75	44.45	1.25	31.75	1.25	31.75	20,000	138
L5Y-12C	3/4" - 14 NPS	1.37	2.25	57.15	2.25	57.15	1.50	38.10	1.50	38.10	20,000	138
L5Y-16C	1-3/8" - 12 UNF	1.75	3.00	76.20	3.00	76.20	2.06	52.32	2.06	52.32	20,000	138



T5Y — Medium Pressure Tee



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
T5Y-4C	7/16" - 20 UNF	0.62	1.75	44.45	1.00	25.40	0.87	22.10	0.68	17.27	20,000	138
T5Y-6C	9/16" - 18 UNF	0.75	2.00	50.80	1.37	34.80	1.00	25.40	1.00	25.40	20,000	138
T5Y-9C	13/16" - 16 UNF	1.00	2.50	63.50	1.75	44.45	1.25	31.75	1.25	31.75	20,000	138
T5Y-12C	3/4" - 14 NPS	1.37	3.00	76.20	2.25	57.15	1.50	38.10	1.50	38.10	20,000	138
T5Y-16C	1-3/8" - 12 UNF	1.75	4.12	104.65	3.00	76.20	2.06	52.32	2.06	52.32	20,000	138


X5Y — Medium Pressure Cross



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
X5Y-4C	7/16" - 20 UNF	0.62	1.75	44.45	1.37	34.80	0.87	22.10	0.68	17.27	20,000	138
X5Y-6C	9/16" - 18 UNF	0.75	2.00	50.80	2.00	50.80	1.00	25.40	1.00	25.40	20,000	138
X5Y-9C	13/16" - 16 UNF	1.00	2.50	63.50	2.50	63.50	1.25	31.75	1.25	31.75	20,000	138
X5Y-12C	3/4" - 14 NPS	1.37	3.00	76.20	3.00	76.20	1.50	38.10	1.50	38.10	20,000	138
X5Y-16C	1-3/8" - 12 UNF	1.75	4.12	104.65	4.12	104.65	2.06	52.32	2.06	52.32	20,000	138

Medium Pressure Adapters

Y2N — Medium Pressure Gland Nut



Part Number	Thread Size	Hex Size		Max. Working Pressure	
		inch	mm	psi	MPa
#					
Y2N-4C	7/16" - 20 UNF	0.50	12.7	20,000	138
Y2N-6C	9/16" - 18 UNF	0.625	15.88	20,000	138
Y2N-9C	13/16" - 16 UNF	0.813	20.64	20,000	138
Y2N-12C	3/4" - 14 NPS	0.75	19.05	20,000	138
Y2N-16C	1-3/8" - 12 UNF	1.375	34.93	20,000	138

Y2C — Medium Pressure Collar



Part Number	Thread Size	Max. Working Pressure	
		psi	MPa
#			
Y2C-4C	1/4" - 28 UNF LH	20,000	138
Y2C-6C	3/8" - 24 UNF LH	20,000	138
Y2C-9C	9/16" - 18 UNF LH	20,000	138
Y2C-12C	3/4" - 16 UNF LH	20,000	138
Y2C-16C	1" - 14 UNF LH	20,000	138


Medium Pressure Adapters

HBPLM — Medium Pressure Plug




Part Number	Tube Size (O.D.)	Max. Working Pressure	
#			
		psi	MPa
HBPLM4-B	1/4"	20,000	138
HBPLM6-B	3/8"	20,000	138
HBPLM9-B	9/16"	20,000	138
HBPLM12-B	3/4"	20,000	138
HBPLM16-B	1"	20,000	138

Medium Pressure Caps



Part Number	Thread Size	Overall Length		Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
5Y4C-CAP	7/16" - 20 UNF	0.95	24.13	0.625	15.88	20,000	138
5Y6C-CAP	9/16" - 18 UNF	1.38	35.05	0.875	22.23	20,000	138
5Y9C-CAP	13/16" - 16 UNF	1.50	38.10	1.25	31.75	20,000	138
5Y12C-CAP	3/4" - 14 NPSM	1.85	46.99	1.375	34.93	20,000	138
5Y16C-CAP	1-3/8" - 12 UNF	2.20	55.88	1.75	44.45	20,000	138

Y204, Y206, Y209, Y212 and Y216 — Medium Pressure Nipple



Length	1/4" O.D.	3/8" O.D.	9/16" O.D.	3/4" O.D.	1" O.D.
2.75"	Y204-0275C				
3"	Y204-0300C	Y206-0300C			
4"	Y204-0400C	Y206-0400C	Y209-0400C	Y212-0400C	
6"	Y204-0600C	Y206-0600C	Y209-0600C	Y212-0600C	Y216-0600C
8"	Y204-0800C	Y206-0800C	Y209-0800C	Y212-0800C	Y216-0800C*
10"	Y204-1000C*	Y206-1000C	Y209-1000C*	Y212-1000C*	Y216-1000C*
12"	Y204-1200C	Y206-1200C	Y209-1200C*	Y212-1200C	Y216-1200C*

*Non-standard part - may require longer lead time

High Pressure Adapters



High Pressure is a 58/60 degree coned and threaded tubing design. With small bore sizes, they have a **maximum working pressure rating of 60,000 psi.**

Advantages:

- An industry standard for use at elevated pressures
- Suitable for repetitive assembly and disassembly

Thread Sizes (determined by tubing O.D.):

- 1/4" O.D. x 0.08" I.D. — 9/16" - 18 male thread on gland nut
- 3/8" O.D. x 0.12" I.D. — 3/4" - 16 male thread on gland nut
- 9/16" O.D. x 0.18" I.D. — 1-1/8" - 12 male thread on gland nut

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-20


High Pressure Adapters

6YY6 — Female High Pressure x Male High Pressure




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6YY6-4-6C	9/16" - 18 UNF	3/4" - 16 UNF	1.75	44.45	0.75	19.05	60,000	414
6YY6-4-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	60,000	414
6YY6-6-4C	3/4" - 16 UNF	9/16" - 18 UNF	1.50	38.10	1.00	25.40	60,000	414
6YY6-6-9C	3/4" - 16 UNF	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	60,000	414
6YY6-9-4C	1-1/8" - 12 UNF	9/16" - 18 UNF	1.75	44.45	1.37	34.80	60,000	414
6YY6-9-6C	1-1/8" - 12 UNF	3/4" - 16 UNF	1.87	47.50	1.37	34.80	60,000	414
6YY6-9-9C	1-1/8" - 12 UNF	1-1/8" - 12 UNF	2.26	57.40	1.375	34.93	60,000	414

Y6Y6 — Male High Pressure x Male High Pressure



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y6Y6-4-4C	9/16" - 18 UNF	9/16" - 18 UNF	1.68	42.67	0.62	15.75	60,000	414
Y6Y6-4-6C	9/16" - 18 UNF	3/4" - 16 UNF	2.06	52.32	0.75	19.05	60,000	414
Y6Y6-4-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	2.25	57.15	1.12	28.45	60,000	414
Y6Y6-6-6C	3/4" - 16 UNF	3/4" - 16 UNF	2.25	57.15	0.75	19.05	60,000	414
Y6Y6-6-9C	3/4" - 16 UNF	1-1/8" - 12 UNF	2.50	63.50	1.12	28.45	60,000	414
Y6Y6-9-9C	1-1/8" - 12 UNF	1-1/8" - 12 UNF	2.62	66.55	1.12	28.45	60,000	414

X6Y6 — Low Angle Face Seal x Male High Pressure




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
X6Y6-6-9C*	9/16"-18 UNF	1-1/8" - 12 UNF	2.00	50.80	1.125	28.58	60,000	414

*Non-standard part - may require longer lead time


High Pressure Adapters

6Y6Y — Female High Pressure, Straight Coupling




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6Y6Y-4-4C	9/16" - 18 UNF	9/16" - 18 UNF	1.75	44.45	1.00	25.40	60,000	414
6Y6Y-6-6C	3/4" - 16 UNF	3/4" - 16 UNF	2.00	50.80	1.00	25.40	60,000	414
6Y6Y-9-9C	1-1/8" - 12 UNF	1-1/8" - 12 UNF	2.37	60.20	1.37	34.80	60,000	414

6Y6Y — Female High Pressure, Reducer Coupling



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6Y6Y-4-6C	9/16" - 18 UNF	3/4" - 16 UNF	1.62	41.15	1.00	25.40	60,000	414
6Y6Y-4-9C	9/16" - 18 UNF	1-1/8" - 12 UNF	1.75	44.45	1.37	34.80	60,000	414
6Y6Y-6-9C	3/4" - 16 UNF	1-1/8" - 12 UNF	2.00	50.80	1.37	34.80	60,000	414

Y6D9 — Male High Pressure x Male BSP






Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y6D9-4-6C	9/16" - 18 UNF	G3/8 - 19	1.57	39.88	0.875	22.23	30,000 *	207*
Y6D9-6-6C	3/4" - 16 UNF	G3/8 - 19	1.85	46.99	0.875	22.23	30,000 *	207*

*BSP connection end lowers working pressure to 30,000psi


High Pressure Adapters



L6Y — High Pressure Elbow




Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
L6Y-4C	9/16" - 18 UNF	1.00	1.37	34.80	1.50	38.10	0.87	22.10	1.00	25.40	60,000	414
L6Y-6C	3/4" - 16 UNF	1.00	1.75	44.45	1.50	38.10	1.25	31.75	1.00	25.40	60,000	414
L6Y-9C	1-1/8" - 12 UNF	1.50	2.62	66.55	1.87	47.50	1.12	28.45	1.12	28.45	60,000	414



T6Y — High Pressure Tee



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
T6Y-4C	9/16" - 18 UNF	1.00	2.00	50.80	1.37	34.80	1.00	25.40	0.87	22.10	60,000	414
T6Y-6C	3/4" - 16 UNF	1.00	2.00	50.80	1.56	39.62	1.00	25.40	1.06	26.92	60,000	414
T6Y-9C	1-1/8" - 12 UNF	1.50	2.62	66.55	2.12	53.85	1.62	41.15	1.37	34.80	60,000	414


X6Y — High Pressure Cross






Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
X6Y-4C	9/16" - 18 UNF	1.00	2.00	50.80	1.50	38.10	1.00	25.40	0.75	19.05	60,000	414
X6Y-6C	3/4" - 16 UNF	1.00	2.12	53.85	2.00	50.80	1.06	26.92	1.00	25.40	60,000	414
X6Y-9C	1-1/8" - 12 UNF	1.50	2.75	69.85	2.62	66.55	1.37	34.80	1.31	33.27	60,000	414


High Pressure Adapters



Y4N — High Pressure Gland Nut




Part Number	Thread Size	Hex Size		Max. Working Pressure	
		inch	mm	psi	MPa
#					
Y4N-4C	9/16" - 18 UNF	0.625	15.89	60,000	414
Y4N-6C	3/4" - 16 UNF	0.813	20.64	60,000	414
Y4N-9C	1-1/8" - 12 UNF	1.188	30.16	60,000	414


Y4C — High Pressure Collar



Part Number	Thread Size	Max. Working Pressure	
		psi	MPa
#			
Y4C-4C	1/4" - 28 UNF LH	60,000	414
Y4C-6C	3/8" - 24 UNF LH	60,000	414
Y4C-9C	9/16" - 18 UNF LH	60,000	414

HBPHM— High Pressure Plug



Part Number	Tube Size (O.D.)	Max. Working Pressure	
		psi	MPa
#			
HBPHM4-B	1/4"	60,000	414
HBPHM6-B	3/8"	60,000	414
HBPHM9-B	9/16"	60,000	414

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-24

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D

Accessories
E

General Technical
F


High Pressure Adapters

High Pressure Caps



Part Number	Thread Size	Overall Length		Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
6Y4C-CAP	1/4" H.P.	1.07	27.18	0.875	22.23	60,000	414
6Y6C-CAP	3/8" H.P.	1.26	32.00	1.000	25.40	60,000	414
6Y9C-CAP	9/16" H.P.	1.50	38.10	1.375	34.93	60,000	414

Locking Nut/Collar — Anti-vibration



Part Number	Size Tube O.D.	Thread Size	A Length		H Hex	
#						
			inch	mm	inch	mm
KCGL40-316-ACL40*	1/4" H.P.	9/16" - 18 UNF	0.68	17.27	0.63	16.00
KCGL60-316-ACL60	3/8" H.P.	3/4" - 16 UNF	1.06	26.92	0.68	17.27
KCGL90-316-ACL90	9/16" H.P.	1-1/8" - 12 UNF	1.56	39.62	1.68	42.67

*Non-standard part - may require longer lead time

Y404, Y406 and Y409 — High Pressure Nipple



Length	1/4" O.D.	3/8" O.D.	9/16" O.D.
2.75"	Y404-0275C		
3"	Y404-0300C	Y406-0300C	
4"	Y404-0400C	Y406-0400C	Y409-0400C
6"	Y404-0600C	Y406-0600C	Y409-0600C
8"	Y404-0800C	Y406-0800C	Y409-0800C
10"	Y404-1000C*	Y406-1000C	Y409-1000C*
12"	Y404-1200C	Y406-1200C	Y409-1200C*

*Non-standard part - may require longer lead time

NPT Adapters



polyflex offers a broad range of high quality stainless steel high pressure NPT adapters. Sizes ranging from 1/16" to 1/2" are rated up to **15,000 psi**; 3/4" and above are rated to **10,000 psi**.

Advantages:

- Used world-wide in OEM and MRO applications
- Compact size make NPT a suitable selection for plumbing in limited or tight space in a compact system

Thread Sizes:

- 1/16" - 27
- 1/8" - 27
- 1/4" - 18
- 3/8" - 18
- 1/2" - 14
- 3/4" - 14
- 1" - 11-1/2

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-26

NPT Adapters


K0101— Male NPT x Male NPT



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
10K0101-12-12C	3/4" - 14 NPT	3/4" - 14 NPT	2.44	61.98	1.13	28.70	10,000	69
10K0101-16-16C	1" - 11-1/2 NPT	1" - 11-1/2 NPT	2.75	69.85	1.38	35.05	10,000	69
15K0101-1-1C	1/16" - 27 NPT	1/16" - 27 NPT	1.00	25.40	0.38	9.65	15,000	103
15K0101-2-2C	1/8" - 27 NPT	1/8" - 27 NPT	1.20	30.48	0.50	12.70	15,000	103
15K0101-4-4C	1/4" - 18 NPT	1/4" - 18 NPT	1.44	36.58	0.63	16.00	15,000	103
15K0101-6-6C	3/8" - 18 NPT	3/8" - 18 NPT	1.70	43.18	0.75	19.05	15,000	103
15K0101-8-8C	1/2" - 14 NPT	1/2" - 14 NPT	2.25	57.15	1.00	25.40	15,000	103
15K0101-2-1C	1/8" - 27 NPT	1/16" - 27 NPT	1.13	28.70	0.50	12.70	15,000	103
15K0101-2-4C	1/8" - 27 NPT	1/4" - 18 NPT	1.35	34.29	0.625	15.88	15,000	103
15K0101-6-8C	3/8" - 18 NPT	1/2" - 14 NPT	1.85	46.99	1.00	25.40	15,000	103
15K0101-12-6C	3/4" - 14 NPT	3/8" - 18 NPT	1.95	49.53	1.125	28.58	15,000	103
15K0101-16-6C	1" - 11-1/2 NPT	3/8" - 18 NPT	2.16	54.86	1.375	34.93	15,000	103
10K0101-12-4C	3/4" - 14 NPT	1/4" - 18 NPT	2.03	51.56	1.125	28.58	10,000	69
10K0101-16-4C	1" - 11-1/2 NPT	1/4" - 18 NPT	2.16	54.86	1.375	34.93	10,000	69
10K0101-16-12C	1" - 11-1/2 NPT	3/4" - 14 NPT	2.56	65.02	1.375	34.93	10,000	69

NPT Adapters

K0201— Female NPT x Male NPT




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
15K0201-1-8C	1/16" - 27 NPT	1/2" - 14 NPT	1.25	31.75	0.87	22.10	15,000	103
15K0201-2-8C	1/8" - 27 NPT	1/2" - 14 NPT	1.25	31.75	0.87	22.10	15,000	103
15K0201-4-8C	1/4" - 18 NPT	1/2" - 14 NPT	1.25	31.75	0.87	22.10	15,000	103
15K0201-6-8C	3/8" - 18 NPT	1/2" - 14 NPT	1.63	41.40	1.00	25.40	15,000	103
15K0201-1-4C	1/16" - 27 NPT	1/4" - 18 NPT	1.30	33.02	0.625	15.88	15,000	103
15K0201-2-1C	1/8" - 27 NPT	1/16" - 27 NPT	1.38	35.05	0.75	19.05	15,000	103
15K0201-4-1C	1/4" - 18 NPT	3/4" - 14 NPT	1.56	39.62	0.875	22.23	15,000	103
15K0201-4-6C	1/4" - 18 NPT	3/8" - 18 NPT	1.50	38.10	0.87	22.10	15,000	103
15K0201-6-2C	3/8" - 18 NPT	1/8" - 27 NPT	1.58	40.13	1.00	25.40	15,000	103
15K0201-6-6C	3/8" - 18 NPT	3/8" - 18 NPT	1.78	45.21	1.00	25.40	15,000	103
15K0201-8-8C	1/2" - 14 NP	1/2" - 14 NPT	2.13	54.10	1.25	31.75	15,000	103
10K0201-4-12C	1/4" - 18 NPT	3/4" - 14 NPT	1.63	41.40	1.125	28.58	10,000	69
10K0201-6-12C	3/8" - 18 NPT	3/4" - 14 NPT	1.60	40.64	1.125	28.58	10,000	69
10K0201-6-16C	3/8" - 18 NPT	1" - 11-1/2 NPT	1.90	48.26	1.375	34.93	10,000	69
10K0201-12-6C	3/4" - 14 NPT	3/8" - 18 NPT	2.25	57.15	1.50	38.10	10,000	69
10K0201-12-12C	3/4" - 14 NPT	3/4" - 14 NPT	2.25	57.15	1.50	38.10	10,000	69
10K0201-12-16C	3/4" - 14 NPT	1" - 11-1/2 NPT	2.25	57.15	1.50	38.10	10,000	69
10K0201-16-6C	1" - 11-1/2 NPT	3/8" - 18 NPT	2.35	59.69	2.00	50.80	10,000	69
10K0201-16-8C	1" - 11-1/2 NPT	1/2" - 14 NPT	2.50	63.50	2.00	50.80	10,000	69

For detailed ordering information, please consult price list or contact Parflex Division.


NPT Adapters

K0202— Female NPT x Female NPT



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
15K0202-2-2C	1/8" - 27 NPT	1/8" - 27 NPT	1.50	38.10	0.75	19.05	15,000	103
15K0202-4-1C	1/4" - 18 NPT	1/16" - 27 NPT	1.63	41.40	0.875	22.23	15,000	103
15K0202-4-4C	1/4" - 18 NPT	1/4" - 18 NPT	1.75	44.45	0.87	22.10	15,000	103
15K0202-6-2C	3/8" - 18 NPT	1/8" - 27 NPT	1.75	44.45	1.00	25.40	15,000	103
15K0202-6-6C	3/8" - 18 NPT	3/8" - 18 NPT	1.75	44.45	1.00	25.40	15,000	103
15K0202-8-1C	1/2" - 14 NPT	1/16" - 27 NPT	1.75	44.45	1.25	31.75	15,000	103
15K0202-8-2C	1/2" - 14 NPT	1/8" - 27 NPT	1.75	44.45	1.25	31.75	15,000	103
15K0202-8-6C	1/2" - 14 NPT	3/8" - 18 NPT	1.75	44.45	1.25	31.75	15,000	103
15K0202-8-8C	1/2" - 14 NPT	1/2" - 14 NPT	2.13	54.10	1.25	31.75	15,000	103
10K0202-12-4C	3/4" - 14 NPT	1/4" - 18 NPT	2.00	50.80	1.50	38.10	10,000	69
10K0202-12-6C	3/4" - 14 NPT	3/8" - 18 NPT	2.00	50.80	1.50	38.10	10,000	69
10K0202-12-12C	3/4" - 14 NPT	3/4" - 14 NPT	2.13	54.10	1.50	38.10	10,000	69
10K0202-12-16C	3/4" - 14 NPT	1" - 11-1/2 NPT	2.38	60.45	2.00	50.80	10,000	69
10K0202-16-16C	1" - 11-1/2 NPT	1" - 11-1/2 NPT	2.50	63.50	2.00	50.80	10,000	69


YA02 — Male Type "M" x Female NPT



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
YA02-6-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.50	38.10	0.75	19.05	15,000	103
YA02-6-8C	9/16" - 18 UNF	1/2" - 14 NPT	2.00	50.80	1.25	31.75	15,000	103
YA02-6-16C	9/16" - 18 UNF	1" - 11-1/2 NPT	2.38	60.45	2.00	50.80	10,000	69
YA02-8-4C	3/4" - 16 UNF	1/4" - 18 NPT	1.63	41.40	0.875	22.23	15,000	103
YA02-8-6C	3/4" - 16 UNF	3/8" - 18 NPT	1.75	44.45	1.00	25.40	15,000	103
YA02-8-8C	3/4" - 16 UNF	1/2" - 14 NPT	2.00	50.80	1.25	31.75	15,000	103
YA02-8-12C	3/4" - 16 UNF	3/4" - 14 NPT	2.13	54.10	1.5	38.10	10,000	69
YA02-11-8C	1" - 12 UNF	1/2" - 14 NPT	2.50	63.50	1.00	25.40	15,000	103
YA02-11-12C	1" - 12 UNF	3/4" - 14 NPT	2.13	54.10	1.50	38.10	10,000	69
YA02-16-16C	1-5/16" - 12 UNF	1" - 11-1/2 NPT	2.38	60.45	2.00	50.80	10,000	69

NPT Adapters

YA01 — Male Type “M” x Male NPT




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
YA01-6-2C	9/16" - 18 UNF	1/8" - 27 NPT	1.28	32.51	0.63	16.00	15,000	103
YA01-6-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.38	35.05	0.63	16.00	15,000	103
YA01-6-6C	9/16" - 18 UNF	3/8" - 18 NPT	1.57	39.88	0.75	19.05	15,000	103
YA01-6-8C	9/16" - 18 UNF	1/2" - 14 NPT	1.75	44.45	0.88	22.35	15,000	103
YA01-6-12C	9/16" - 18 UNF	3/4" - 14 NPT	1.95	49.53	1.13	28.58	10,000	69
YA01-6-16C	9/16" - 18 UNF	1" - 11-1/2 NPT	2.26	57.40	1.38	34.93	10,000	69
YA01-8-4C	3/4" - 16 UNF	1/4" - 18 NPT	1.8	45.72	0.75	19.05	15,000	103
YA01-8-6C	3/4" - 16 UNF	3/8" - 18 NPT	1.73	43.94	0.75	19.05	15,000	103
YA01-8-8C	3/4" - 16 UNF	1/2" - 14 NPT	1.95	49.53	0.88	22.35	15,000	103
YA01-8-12C	3/4" - 16 UNF	3/4" - 14 NPT	2.13	54.10	1.13	28.70	10,000	69
YA01-8-16C	3/4" - 16 UNF	1" - 11-1/2 NPT	2.38	60.45	1.38	35.05	10,000	69
YA01-11-6C	1" - 12 UNF	3/8" - 18 NPT	1.85	46.99	1.00	25.40	15,000	103
YA01-11-8C	1" - 12 UNF	1/2" - 14 NPT	2.00	50.80	1.00	25.40	15,000	103
YA01-11-12C	1" - 12 UNF	3/4" - 14 NPT	2.13	54.10	1.13	28.70	10,000	69
YA01-11-16C	1" - 12 UNF	1" - 11-1/2 NPT	2.38	60.45	1.38	35.05	10,000	69
YA01-16-8C	1-5/16" - 12 UNF	1/2" - 14 NPT	2.13	54.10	1.38	35.05	15,000	103
YA01-16-12C	1-5/16" - 12 UNF	3/4" - 14 NPT	2.38	60.45	1.38	35.05	10,000	69
YA01-16-16C	1-5/16" - 12 UNF	1" - 11-1/2 NPT	2.5	63.50	1.38	35.05	10,000	69
YA01-16-20C	1-5/16" - 12 UNF	1-1/4" - 11-1/2 NPT	2.75	69.85	1.75	44.45	10,000	69
YA01-16-24C	1-5/16" - 12 UNF	1-1/2" - 11-1/2 NPT	2.75	69.85	2.00	50.80	7,500	52
YA01-16-32C	1-5/16" - 12 UNF	2" - 11-1/2 NPT	2.75	69.85	2.38	60.45	7,500	52

For detailed ordering information, please consult price list or contact Parflex Division.

NPT Adapters

5Y01 — Female Medium Pressure x Male NPT




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5Y01-4-2C	7/16" - 20 UNF	1/8" - 27 NPT	1.43	36.32	0.75	19.05	15,000	103
5Y01-4-4C	7/16" - 20 UNF	1/4" - 18 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y01-4-6C	7/16" - 20 UNF	3/8" - 18 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y01-4-8C	7/16" - 20 UNF	1/2" - 14 NPT	1.75	44.45	1.00	25.40	15,000	103
5Y01-4-12C	7/16" - 20 UNF	3/4" - 14 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-4-16C*	7/16" - 20 UNF	1" - 11-1/2 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-6-2C*	9/16" - 18 UNF	1/8" - 27 NPT	1.43	36.32	0.75	19.05	15,000	103
5Y01-6-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y01-6-6C	9/16" - 18 UNF	3/8" - 18 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y01-6-8C	9/16" - 18 UNF	1/2" - 14 NPT	1.74	44.20	1.00	25.40	15,000	103
5Y01-6-12C	9/16" - 18 UNF	3/4" - 14 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-6-16C	9/16" - 18 UNF	1" - 11-1/2 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-9-2C*	13/16" - 16 UNF	1/8" - 27 NPT	1.87	47.50	1.00	25.40	15,000	103
5Y01-9-4C	13/16" - 16 UNF	1/4" - 18 NPT	1.87	47.50	1.00	25.40	15,000	103
5Y01-9-6C	13/16" - 16 UNF	3/8" - 18 NPT	1.87	47.50	1.00	25.40	15,000	103
5Y01-9-8C	13/16" - 16 UNF	1/2" - 14 NPT	1.87	47.50	1.00	25.40	15,000	103
5Y01-9-12C	13/16" - 16 UNF	3/4" - 14 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-9-16C	13/16" - 16 UNF	1" - 11-1/2 NPT	1.87	47.50	1.37	34.80	10,000	69
5Y01-12-2C*	3/4" - 14 NPS	1/8" - 27 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-12-4C	3/4" - 14 NPS	1/4" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-12-6C*	3/4" - 14 NPS	3/8" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-12-8C	3/4" - 14 NPS	1/2" - 14 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-12-12C	3/4" - 14 NPS	3/4" - 14 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-12-16C	3/4" - 14 NPS	1" - 11-1/2 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-2C*	1-3/8" - 12 UNF	1/8" - 27 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-4C	1-3/8" - 12 UNF	1/4" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-6C*	1-3/8" - 12 UNF	3/8" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-8C	1-3/8" - 12 UNF	1/2" - 14 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-12C	1-3/8" - 12 UNF	3/4" - 14 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y01-16-16C	1-3/8" - 12 UNF	1" - 11-1/2 NPT	2.50	63.50	1.37	34.80	10,000	69

*Non-standard part - may require longer lead time

NPT Adapters

02Y5 — Female NPT x Male Medium Pressure



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
02Y5-1-9C	1/16" - 27 NPT	13/16" - 16 UNF	2.00	50.80	1.12	28.45	15,000	103
02Y5-2-4C	1/8" - 27 NPT	7/16" - 20 UNF	1.75	44.45	0.75	19.05	15,000	103
02Y5-2-6C	1/8" - 27 NPT	9/16" - 18 UNF	1.87	47.50	0.75	19.05	15,000	103
02Y5-2-9C	1/8" - 27 NPT	13/16" - 16 UNF	1.87	47.50	0.87	22.10	15,000	103
02Y5-2-12C	1/8" - 27 NPT	3/4" - 14 NPSM	2.00	50.80	1.12	28.45	15,000	103
02Y5-2-16C*	1/8" - 27 NPT	1" - 14 UNF LH	3.00	76.20	1.00	25.40	15,000	103
02Y5-4-4C	1/4" - 18 NPT	7/16" - 20 UNF	1.75	44.45	0.75	19.05	15,000	103
02Y5-4-6C	1/4" - 18 NPT	9/16" - 18 UNF	1.87	47.50	0.75	19.05	15,000	103
02Y5-4-9C	1/4" - 18 NPT	13/16" - 16 UNF	1.87	47.50	0.87	22.10	15,000	103
02Y5-4-12C	1/4" - 18 NPT	3/4" - 14 NPSM	2.00	50.80	1.12	28.45	15,000	103
02Y5-4-16C	1/4" - 18 NPT	1" - 14 UNF LH	3.00	76.20	1.00	25.40	15,000	103
02Y5-6-4C	3/8" - 18 NPT	7/16" - 20 UNF	2.00	50.80	1.00	25.40	15,000	103
02Y5-6-6C	3/8" - 18 NPT	9/16" - 18 UNF	2.12	53.85	1.00	25.40	15,000	103
02Y5-6-9C	3/8" - 18 NPT	13/16" - 16 UNF	2.25	57.15	1.00	25.40	15,000	103
02Y5-6-12C	3/8" - 18 NPT	3/4" - 14 NPSM	2.00	50.80	1.12	28.45	15,000	103
02Y5-6-16C	3/8" - 18 NPT	1" - 14 UNF LH	3.00	76.20	1.00	25.40	15,000	103
02Y5-8-4C	1/2" - 14 NPT	7/16" - 20 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y5-8-6C	1/2" - 14 NPT	9/16" - 18 UNF	1.25	31.75	1.12	28.45	15,000	103
02Y5-8-9C	1/2" - 14 NPT	13/16" - 16 UNF	2.37	60.20	1.12	28.45	15,000	103
02Y5-8-12C	1/2" - 14 NPT	3/4" - 14 NPSM	2.50	63.50	1.12	28.45	15,000	103
02Y5-8-16C	1/2" - 14 NPT	1" - 14 UNF LH	3.75	95.25	1.12	28.45	15,000	103
02Y5-12-4C*	3/4" - 14 NPT	7/16" - 20 UNF	2.37	60.20	1.37	34.80	10,000	69
02Y5-12-6C	3/4" - 14 NPT	9/16" - 18 UNF	2.50	63.50	1.37	34.80	10,000	69
02Y5-12-9C	3/4" - 14 NPT	13/16" - 16 UNF	2.62	66.55	1.37	34.80	10,000	69
02Y5-12-12C	3/4" - 14 NPT	3/4" - 14 NPSM	2.75	69.85	1.50	38.10	10,000	69
02Y5-12-16C	3/4" - 14 NPT	1" - 14 UNF LH	4.12	104.65	1.50	38.10	10,000	69
02Y5-16-6C	1-3/8" - 12 UNF	9/16" - 18 UNF	2.87	72.90	1.87	47.50	10,000	69
02Y5-16-9C	1-3/8" - 12 UNF	13/16" - 16 UNF	3.00	76.20	1.87	47.50	10,000	69
02Y5-16-12C	1-3/8" - 12 UNF	3/4" - 14 NPSM	3.00	76.20	1.87	47.50	10,000	69
02Y5-16-16C	1-3/8" - 12 UNF	1" - 14 UNF LH	4.37	111.00	1.87	47.50	10,000	69

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-32

Hose
A

Fittings
B

Adapters & Valves
C


Quick Couplings
D

Accessories
E

General Technical
F

NPT Adapters

Y501 — Male Medium Pressure x Male NPT




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y501-4-4C	7/16" - 20 UNF	1/4" - 18 NPT	1.60	40.64	0.63	16.00	15,000	103
Y501-4-8C	7/16" - 20 UNF	1/2" - 14 NPT	2.12	53.85	0.87	22.10	15,000	103
Y501-6-4C	9/16" - 18 UNF	1/4" - 18 NPT	2.06	52.32	0.75	19.05	15,000	103
Y501-6-6C	9/16" - 18 UNF	3/8" - 18 NPT	2.06	52.32	0.75	19.05	15,000	103
Y501-6-8C	9/16" - 18 UNF	1/2" - 14 NPT	2.18	55.37	0.87	22.10	15,000	103
Y501-9-2C*	13/16" - 16 UNF	1/8" - 27 NPT	2.12	53.85	0.87	22.10	15,000	103
Y501-9-4C	13/16" - 16 UNF	1/4" - 18 NPT	2.25	57.15	0.87	22.10	15,000	103
Y501-9-6C	13/16" - 16 UNF	3/8" - 18 NPT	2.25	57.15	0.87	22.10	15,000	103
Y501-9-8C	13/16" - 16 UNF	1/2" - 14 NPT	2.37	60.20	0.87	22.10	15,000	103
Y501-9-12C	13/16" - 16 UNF	3/4" - 14 NPT	2.62	66.55	1.12	28.45	10,000	69
Y501-9-16C	13/16" - 16 UNF	1" - 11-1/2 NPT	2.62	66.55	1.37	34.80	10,000	69
Y501-12-2C*	3/4" - 14 NPS	1/8" - 27 NPT	2.37	60.20	1.12	28.45	15,000	103
Y501-12-4C*	3/4" - 14 NPS	1/4" - 18 NPT	2.50	63.50	1.12	28.45	15,000	103
Y501-12-6C*	3/4" - 14 NPS	3/8" - 18 NPT	2.50	63.50	1.12	28.45	15,000	103
Y501-12-8C	3/4" - 14 NPS	1/2" - 14 NPT	2.62	66.55	1.12	28.45	15,000	103
Y501-12-12C	3/4" - 14 NPS	3/4" - 14 NPT	2.75	69.85	1.12	28.45	10,000	69
Y501-12-16C	3/4" - 14 NPS	1" - 11-1/2 NPT	3.00	76.20	1.37	34.80	10,000	69
Y501-16-2C*	1-3/8" - 12 UNF	1/8" - 27 NPT	3.62	91.95	1.00	25.40	15,000	103
Y501-16-4C	1-3/8" - 12 UNF	1/4" - 18 NPT	3.75	95.25v	1.00	25.40	15,000	103
Y501-16-6C	1-3/8" - 12 UNF	3/8" - 18 NPT	3.75	95.25	1.00	25.40	15,000	103
Y501-16-8C	1-3/8" - 12 UNF	1/2" - 14 NPT	3.87	98.30	1.00	25.40	15,000	103
Y501-16-12C	1-3/8" - 12 UNF	3/4" - 14 NPT	3.87	98.30	1.12	28.45	10,000	69
Y501-16-16C	1-3/8" - 12 UNF	1" - 11-1/2 NPT	4.00	101.60	1.37	34.80	10,000	69

*Non-standard part - may require longer lead time

NPT Adapters

5Y02 — Female Medium Pressure x Female NPT Coupling



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
5Y02-4-2C	7/16" - 20 UNF	1/8" - 27 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y02-4-4C	7/16" - 20 UNF	1/4" - 18 NPT	1.62	41.15	0.75	19.05	15,000	103
5Y02-4-6C	7/16" - 20 UNF	3/8" - 18 NPT	2.00	50.80	1.00	25.40	15,000	103
5Y02-4-8C	7/16" - 20 UNF	1/2" - 14 NPT	2.00	50.80	1.12	28.45	15,000	103
5Y02-4-12C*	7/16" - 20 UNF	3/4" - 14 NPT	2.37	60.20	1.37	34.80	10,000	69
5Y02-4-16C*	7/16" - 20 UNF	1" - 11-1/2 NPT	2.62	66.55	2.00	50.80	10,000	69
5Y02-6-2C	9/16" - 18 UNF	1/8" - 27 NPT	1.75	44.45	0.75	19.05	15,000	103
5Y02-6-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.75	44.45	0.75	19.05	15,000	103
5Y02-6-6C	9/16" - 18 UNF	3/8" - 18 NPT	2.12	53.85	1.00	25.40	15,000	103
5Y02-6-8C	9/16" - 18 UNF	1/2" - 14 NPT	2.12	53.85	1.12	28.45	15,000	103
5Y02-6-12C	9/16" - 18 UNF	3/4" - 14 NPT	2.37	60.20	1.37	34.80	10,000	69
5Y02-6-16C*	9/16" - 18 UNF	1" - 11-1/2 NPT	2.75	69.85	2.00	50.80	10,000	69
5Y02-9-2C*	13/16" - 16 UNF	1/8" - 27 NPT	2.12	53.85	1.00	25.40	15,000	103
5Y02-9-4C	13/16" - 16 UNF	1/4" - 18 NPT	2.12	53.85	1.00	25.40	15,000	103
5Y02-9-6C	13/16" - 16 UNF	3/8" - 18 NPT	2.12	53.85	1.00	25.40	15,000	103
5Y02-9-8C	13/16" - 16 UNF	1/2" - 14 NPT	2.25	57.15	1.12	28.45	15,000	103
5Y02-9-12C	13/16" - 16 UNF	3/4" - 14 NPT	2.50	63.50	1.37	34.80	10,000	69
5Y02-9-16C*	13/16" - 16 UNF	1" - 11-1/2 NPT	2.87	72.90	2.00	50.80	10,000	69
5Y02-12-2C*	3/4" - 14 NPS	1/8" - 27 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y02-12-4C*	3/4" - 14 NPS	1/4" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y02-12-6C*	3/4" - 14 NPS	3/8" - 18 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y02-12-8C	3/4" - 14 NPS	1/2" - 14 NPT	2.50	63.50	1.37	34.80	15,000	103
5Y02-12-12C	3/4" - 14 NPS	3/4" - 14 NPT	2.75	69.85	1.50	38.10	10,000	69
5Y02-12-16C	3/4" - 14 NPS	1" - 11-1/2 NPT	3.00	76.20	1.87	47.50	15,000	103
5Y02-16-2C*	1-3/8" - 12 UNF	1/8" - 27 NPT	3.00	76.20	1.75	44.45	15,000	103
5Y02-16-4C*	1-3/8" - 12 UNF	1/4" - 18 NPT	3.00	76.20	1.75	44.45	15,000	103
5Y02-16-6C*	1-3/8" - 12 UNF	3/8" - 18 NPT	3.00	76.20	1.75	44.45	15,000	103
5Y02-16-8C*	1-3/8" - 12 UNF	1/2" - 14 NPT	3.00	76.20	1.75	44.45	15,000	103
5Y02-16-12C	1-3/8" - 12 UNF	3/4" - 14 NPT	3.50	88.90	1.50	38.10	10,000	69
5Y02-16-16C	1-3/8" - 12 UNF	1" - 11-1/2 NPT	3.75	95.25	1.87	47.50	10,000	69

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-34

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D





Accessories
E

General Technical
F

NPT Adapters

6Y02 — Female High Pressure x Female NPT Coupling




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6Y02-4-2C*	9/16" - 18 UNF	1/8" - 27 NPT	1.50	38.10	1.00	25.40	15,000	103
6Y02-4-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.50	38.10	1.00	25.40	15,000	103
6Y02-4-6C	9/16" - 18 UNF	3/8" - 18 NPT	1.87	47.50	1.00	25.40	15,000	103
6Y02-4-8C	9/16" - 18 UNF	1/2" - 14 NPT	1.87	47.50	1.12	28.45	15,000	103
6Y02-4-12C	9/16" - 18 UNF	3/4" - 14 NPT	2.00	50.80	1.62	41.15	10,000	69
6Y02-4-16C*	9/16" - 18 UNF	1" - 11-1/2 NPT	2.50	63.50	1.75	44.45	10,000	69
6Y02-6-2C	3/4" - 16 UNF	1/8" - 27 NPT	1.87	47.50	1.00	25.40	15,000	103
6Y02-6-4C	3/4" - 16 UNF	1/4" - 18 NPT	1.87	47.50	1.00	25.40	15,000	103
6Y02-6-6C	3/4" - 16 UNF	3/8" - 18 NPT	1.87	47.50	1.00	25.40	15,000	103
6Y02-6-8C	3/4" - 16 UNF	1/2" - 14 NPT	1.87	47.50	1.12	28.45	15,000	103
6Y02-6-12C	3/4" - 16 UNF	3/4" - 14 NPT	2.12	53.85	1.37	34.80	10,000	69
6Y02-6-16C*	3/4" - 16 UNF	1" - 11-1/2 NPT	2.50	63.50	1.75	44.45	10,000	69
6Y02-9-2C	1-1/8" - 12 UNF	1/8" - 27 NPT	2.37	60.20	1.37	34.80	15,000	103
6Y02-9-4C	1-1/8" - 12 UNF	1/4" - 18 NPT	2.37	60.20	1.37	34.80	15,000	103
6Y02-9-6C	1-1/8" - 12 UNF	3/8" - 18 NPT	2.37	60.20	1.37	34.80	15,000	103
6Y02-9-8C	1-1/8" - 12 UNF	1/2" - 14 NPT	2.37	60.20	1.37	34.80	15,000	103
6Y02-9-12C	1-1/8" - 12 UNF	3/4" - 14 NPT	2.37	60.20	1.37	34.80	10,000	69
6Y02-9-16C*	1-1/8" - 12 UNF	1" - 11-1/2 NPT	2.62	66.55	2.00	50.80	10,000	69

*Non-standard part - may require longer lead time

NPT Adapters

6Y01 — Female High Pressure x Male NPT




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
6Y01-4-2C	9/16" - 18 UNF	1/8" - 27 NPT	1.25	31.75	0.75	19.05	15,000	103
6Y01-4-4C	9/16" - 18 UNF	1/4" - 18 NPT	1.37	34.80	0.75	19.05	15,000	103
6Y01-4-6C	9/16" - 18 UNF	3/8" - 18 NPT	1.37	34.80	0.75	19.05	15,000	103
6Y01-4-8C	9/16" - 18 UNF	1/2" - 14 NPT	1.75	44.45	1.00	25.40	15,000	103
6Y01-4-12C	9/16" - 18 UNF	3/4" - 14 NPT	1.75	44.45	1.37	34.80	10,000	69
6Y01-4-16C	9/16" - 18 UNF	1" - 11-1/2 NPT	1.62	41.15	1.37	34.80	10,000	69
6Y01-6-1C	3/4" - 16 UNF	1/16" - 27 NPT	1.63	41.40	1.00	25.40	15,000	103
6Y01-6-2C*	3/4" - 16 UNF	1/8" - 27 NPT	1.50	38.10	1.00	25.40	15,000	103
6Y01-6-4C	3/4" - 16 UNF	1/4" - 18 NPT	1.62	41.15	1.00	25.40	15,000	103
6Y01-6-6C	3/4" - 16 UNF	3/8" - 18 NPT	1.62	41.15	1.00	25.40	15,000	103
6Y01-6-8C	3/4" - 16 UNF	1/2" - 14 NPT	1.75	44.45	1.00	25.40	15,000	103
6Y01-6-12C*	3/4" - 16 UNF	3/4" - 14 NPT	1.87	47.50	1.37	34.80	10,000	69
6Y01-6-16C	3/4" - 16 UNF	1" - 11-1/2 NPT	1.87	47.50	1.37	34.80	10,000	69
6Y01-9-2C*	1-1/8" - 12 UNF	1/8" - 27 NPT	1.50	38.10	1.37	34.80	15,000	103
6Y01-9-4C	1-1/8" - 12 UNF	1/4" - 18 NPT	1.62	41.15	1.27	32.26	15,000	103
6Y01-9-6C	1-1/8" - 12 UNF	3/8" - 18 NPT	1.75	44.45	1.37	34.80	15,000	103
6Y01-9-8C	1-1/8" - 12 UNF	1/2" - 14 NPT	1.87	47.50	1.37	34.80	15,000	103
6Y01-9-12C	1-1/8" - 12 UNF	3/4" - 14 NPT	1.87	47.50	1.37	34.80	10,000	69
6Y01-9-16C	1-1/8" - 12 UNF	1" - 11-1/2 NPT	2.00	50.80	1.37	34.80	10,000	69

*Non-standard part - may require longer lead time


NPT Adapters

Y601 — Male High Pressure x Male NPT



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y601-4-2C	9/16" - 18 UNF	1/8" - 27 NPT	1.87	47.50	0.62	15.75	15,000	103
Y601-4-4C	9/16" - 18 UNF	1/4" - 18 NPT	2.06	52.32	0.75	19.05	15,000	103
Y601-4-6C	9/16" - 18 UNF	3/8" - 18 NPT	2.00	50.80	0.75	19.05	15,000	103
Y601-4-8C	9/16" - 18 UNF	1/2" - 14 NPT	2.12	53.85	0.87	22.10	15,000	103
Y601-4-12C	9/16" - 18 UNF	3/4" - 14 NPT	2.25	57.15	1.12	28.45	10,000	69
Y601-6-4C	3/4" - 16 UNF	1/4" - 18 NPT	2.12	53.85	0.87	22.10	15,000	103
Y601-6-6C	3/4" - 16 UNF	3/8" - 18 NPT	2.12	53.85	0.87	22.10	15,000	103
Y601-6-8C	3/4" - 16 UNF	1/2" - 14 NPT	2.28	57.91	0.875	22.23	15,000	103
Y601-9-4C	1-1/8" - 12 UNF	1/4" - 18 NPT	2.37	60.20	1.12	28.45	15,000	103
Y601-9-6C	1-1/8" - 12 UNF	3/8" - 18 NPT	2.37	60.20	1.12	28.45	15,000	103
Y601-9-8C	1-1/8" - 12 UNF	1/2" - 14 NPT	2.50	63.50	1.12	28.45	15,000	103
Y601-9-12C	1-1/8" - 12 UNF	3/4" - 14 NPT	2.62	66.55	1.12	28.45	10,000	69
Y601-9-16C	1-1/8" - 12 UNF	1" - 11-1/2 NPT	2.75	69.85	1.37	34.80	10,000	69


02Y6 — Female NPT x Male High Pressure







Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
02Y6-1-6C	1/16" - 27 NPT	3/4" - 16 UNF	1.75	44.45	0.75	19.05	15,000	103
02Y6-2-4C	1/8" - 27 NPT	9/16" - 18 UNF	1.62	41.15	0.75	19.05	15,000	103
02Y6-2-6C	1/8" - 27 NPT	3/4" - 16 UNF	1.62	41.15	0.75	19.05	15,000	103
02Y6-2-9C	1/8" - 27 NPT	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-4-4C	1/4" - 18 NPT	9/16" - 18 UNF	1.75	44.45	0.75	19.05	15,000	103
02Y6-4-6C	1/4" - 18 NPT	3/4" - 16 UNF	1.75	44.45	0.75	19.05	15,000	103
02Y6-4-9C	1/4" - 18 NPT	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-6-4C	3/8" - 18 NPT	9/16" - 18 UNF	1.75	44.45	1.00	25.40	15,000	103
02Y6-6-6C	3/8" - 18 NPT	3/4" - 16 UNF	1.75	44.45	1.00	25.40	15,000	103
02Y6-6-9C	3/8" - 18 NPT	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-8-4C	1/2" - 14 NPT	9/16" - 18 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-8-6C	1/2" - 14 NPT	3/4" - 16 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-8-9C	1/2" - 14 NPT	1-1/8" - 12 UNF	2.12	53.85	1.12	28.45	15,000	103
02Y6-12-6C	3/4" - 14 NPT	3/4" - 16 UNF	1.50	38.10	1.62	41.15	10,000	69
02Y6-12-9C	3/4" - 14 NPT	1-1/8" - 12 UNF	2.25	57.15	1.37	34.80	10,000	69
02Y6-16-9C	1" - 11-1/2 NPT	1-1/8" - 12 UNF	2.00	50.80	2.75	69.85	10,000	69


NPT Adapters





K0203— Female NPT x Male JIC




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
10K0203-4-6C	1/4" - 18 NPT	9/16" - 18 UNF	1.68	42.67	0.875	22.23	10,000	69
10K0203-4-8C	1/4" - 18 NPT	3/4" - 16 UNF	1.79	45.47	0.875	22.23	10,000	69
10K0203-6-4C	3/8" - 18 NPT	7/16" - 20 UNF	1.76	44.70	1.00	25.40	10,000	69
10K0203-6-6C	3/8" - 18 NPT	9/16" - 18 UNF	1.68	42.67	1.00	25.40	10,000	69
10K0203-6-8C	3/8" - 18 NPT	3/4" - 16 UNF	1.88	47.75	1.00	25.40	10,000	69
10K0203-8-4C	1/2" - 14 NPT	7/16" - 20 UNF	2.05	52.07	1.25	31.75	10,000	69
10K0203-8-6C	1/2" - 14 NPT	9/16" - 18 UNF	1.93	49.02	1.25	31.75	10,000	69
10K0203-8-8C	1/2" - 14 NPT	3/4" - 16 UNF	2.04	51.82	1.25	31.75	10,000	69
10K0203-16-16C	1" - 11-1/2 NPT	1-5/16" - 12 UNF	2.68	68.07	2.00	50.80	10,000	69





01D9 — Male NPT x Male BSP



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
01D9-6-6C	3/8" - 18 NPT	G3/8 - 19	1.57	39.88	0.875	22.23	15,000	103
01D9-8-6C	1/2" - 14 NPT	G3/8 - 19	1.86	47.24	0.875	22.23	15,000	103
01D9-8-8C	1/2" - 14 NPT	G1/2 - 14	1.98	50.29	1.000	25.40	15,000	103

02D9 — Female NPT x Male BSP



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
02D9-8-8C	1/2" - 14 NPT	G1/2 - 14	2.10	53.34	1.25	31.75	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-38

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D



Accessories
E

General Technical
F


NPT Adapters



KL02 — NPT Elbow



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
10KL02-12C	3/4" - 14 NPT	2.05	1.85	46.99	1.85	46.99	1.35	34.29	1.35	34.29	10,000	69
10KL02-16C	1" - 11-1/2 NPT	2.5	3.83	97.28	3.83	97.28	1.82	46.23	1.82	46.23	10,000	69
15KL02-4C	1/4" - 18 NPT	1.15	1.7	43.18	1.7	43.18	0.8	20.32	0.8	20.32	15,000	103
15KL02-6C	3/8" - 18 NPT	1.38	1.9	48.26	1.9	48.26	0.9	22.86	0.9	22.86	15,000	103
15KL02-8C	1/2" - 14 NPT	1.63	2.15	54.61	2.15	54.61	1.03	26.16	1.03	26.16	15,000	103


KL02 — NPT 45° Elbow





Part Number	Thread Size	Thickness	E		F		G		Max. Working Pressure	
#										
			inch	mm	inch	mm	inch	mm	psi	MPa
15KL02-4C-45	1/4" - 18 NPT	1.15	1.68	42.67	1.68	42.67	0.7	17.78	15,000	103
15KL02-6C-45	3/8" - 18 NPT	1.38	1.89	48.01	1.89	48.01	0.91	23.11	15,000	103
15KL02-8C-45	1/2" - 14 NPT	1.63	2.15	54.61	2.15	54.61	0.94	23.88	15,000	103
15KL02-12C-45	3/4" - 14 NPT	2	2.88	73.15	2.88	73.15	1.2	30.48	10,000	69


NPT Adapters



KT02 — NPT Tee



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
10KT02-12C	3/4" - 14 NPT	2.05	2.70	68.58	1.85	46.99	1.35	34.29	2.05	52.07	10,000	69
10KT02-16C	1" - 11-1/2 NPT	2.50	3.63	92.20	3.83	97.28	1.82	46.23	2.5	63.50	10,000	69
15KT02-4C	1/4" - 18 NPT	1.15	1.60	40.64	1.7	43.18	0.8	20.32	1.15	29.21	15,000	103
15KT02-6C	3/8" - 18 NPT	1.38	1.80	45.72	1.9	48.26	0.9	22.86	1.38	35.05	15,000	103
15KT02-8C	1/2" - 14 NPT	1.63	2.05	52.07	2.15	54.61	1.03	26.16	1.63	41.40	15,000	103

KX02 — NPT Cross



Part Number	Thread Size	Thickness	E		F		G		H		Max. Working Pressure	
#												
			inch	mm	inch	mm	inch	mm	inch	mm	psi	MPa
10KX02-12C	3/4" - 14 NPT	2.05	2.70	68.58	2.7	68.58	1.35	34.29	1.35	34.29	10,000	69
10KX02-16C	1" - 11-1/2 NPT	2.50	3.63	92.20	3.63	92.20	1.82	46.23	1.82	46.23	10,000	69
15KX02-4C	1/4" - 18 NPT	1.15	1.60	40.64	1.6	40.64	0.8	20.32	0.8	20.32	15,000	103
15KX02-6C	3/8" - 18 NPT	1.38	1.80	45.72	1.8	45.72	0.9	22.86	0.9	22.86	15,000	103
15KX02-8C	1/2" - 14 NPT	1.63	2.05	52.07	2.05	52.07	1.03	26.16	1.03	26.16	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-40

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D




Accessories
E

General Technical
F


NPT Adapters




NPT Caps



Part Number	Thread Size	Overall Length		Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
15K02-2C-CAP	1/8" - 27 NPT	0.90	22.86	0.75	19.05	15,000	103
15K02-4C-CAP	1/4" - 18 NPT	1.16	29.46	0.875	22.23	15,000	103
15K02-6C-CAP	3/8" - 18 NPT	1.25	31.75	1.00	25.40	15,000	103
15K02-8C-CAP	1/2" - 14 NPT	1.43	36.32	1.25	31.75	15,000	103
15K02-12C-CAP	3/4" - 14 NPT	1.5	38.10	1.50	38.10	15,000	103

NPT Plugs



Part Number	Thread Size	A Overall Length		Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
10KP01-12C	3/4" - 14 NPT	1.45	36.83	1.125	28.58	10,000	69
10KP01-16C	1" - 11-1/2 NPT	1.81	45.97	1.375	34.93	10,000	69
15KP01-1C	1/16" - 27 NPT	0.68	17.27	0.375	9.53	15,000	103
15KP01-2C	1/8" - 27 NPT	0.75	19.05	0.50	12.70	15,000	103

JIC Adapters



Parker Parflex offers a wide range of high quality stainless steel high pressure JIC adapters from **10,000 psi to 15,000 psi** operating pressure. Sizes range from 1/4" to 1".

Advantages:


- All adapters are rated to a minimum operating pressure of 10,000 psi
- Meets SAE J514 configuration on flare end
- Compact envelope size for ease of installation

Sizes:

- 7/16" - 20 UNF
- 9/16" - 18 UNF
- 3/4" - 16 UNF
- 7/8" - 14 UNF
- 1-1/16" - 12 UNF
- 1-5/16" - 12 UNF


JIC Adapters

K0303— Male JIC x Male JIC




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
10K0303-4-4C	7/16" - 20 UNF	7/16" - 20 UNF	1.50	38.10	0.625	15.88	10,000	69
10K0303-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	1.50	38.10	0.625	15.88	10,000	69
10K0303-4-8C	7/16" - 20 UNF	3/4" - 16 UNF	1.72	43.69	0.875	22.23	10,000	69
10K0303-6-8C	9/16" - 18 UNF	3/4" - 16 UNF	1.73	43.94	0.875	22.23	10,000	69

K0306— Male JIC x Female JIC



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
10K0306-4-4C	7/16" - 20 UNF	7/16" - 20 UNF	1.43	36.32	0.75	19.05	10,000	69
10K0306-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	1.55	39.37	0.875	22.23	10,000	69
10K0306-4-8C	7/16" - 20 UNF	3/4" - 16 UNF	1.60	40.64	1.00	25.40	10,000	69
10K0306-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.55	39.37	0.875	22.23	10,000	69
10K0306-8-6C	3/4" - 16 UNF	9/16" - 18 UNF	1.55	39.37	0.875	22.23	10,000	69


K0606— Female JIC x Female JIC



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
10K0606-4-4C	7/16" - 20 UNF	7/16" - 20 UNF	1.35	34.29	0.75	19.05	10,000	69
10K0606-4-6C	7/16" - 20 UNF	9/16" - 18 UNF	1.50	38.10	0.875	22.23	10,000	69
10K0606-6-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.40	35.56	0.875	22.23	10,000	69


JIC Adapters

YA03 — Male Type “M” x Male JIC




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
YA03-11-6C	1" - 12 UNF	9/16" - 18 UNF	1.69	42.93	1.00	34.93	10,000	103
YA03-16-8C	1-5/16" - 12 UNF	3/4" - 16 UNF	1.79	45.47	1.375	34.93	10,000	103
YA03-16-12C	1-5/16" - 12 UNF	1- 1/16" - 12 UNF	2.00	50.80	1.375	34.93	10,000	69

Y503 — Male Medium Pressure x Male JIC



Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y503-4-8C	7/16" - 20 UNF	3/4" - 16 UNF	1.74	44.20	0.875	22.23	15,000	103
Y503-9-10C	13/16" - 16 UNF	7/8" - 14 UNF	2.38	60.45	1.000	25.40	10,000	69
Y503-9-12C	13/16" - 16 UNF	1-1/16" - 12 UNF	2.47	62.74	1.125	28.58	10,000	69
Y503-9-16C	13/16" - 16 UNF	1-5/16" - 12 UNF	2.55	64.77	1.375	34.93	10,000	69
Y503-12-6C	3/4" - 14 NPSM	9/16" - 18 UNF	2.25	57.15	1.125	28.58	15,000	103
Y503-12-8C	3/4" - 14 NPSM	3/4" - 16 UNF	2.35	59.69	1.125	28.58	15,000	103
Y503-12-12C	3/4" - 14 NPSM	1-1/16" - 12 UNF	2.66	67.56	1.125	28.58	10,000	69
Y503-16-12C	1" - 14 UNF LH	1-1/16" - 12 UNF	4.02	102.11	1.125	28.58	10,000	69
Y503-16-16C	1" - 14 UNF LH	1-5/16" - 12 UNF	4.07	103.38	1.375	34.93	10,000	69

Y603 — Male High Pressure x Male JIC




Part Number	T1 Thread Size	T2 Thread Size	A Overall Length		H Hex		Max. Working Pressure	
#								
			inch	mm	inch	mm	psi	MPa
Y603-4-4C	9/16" - 18 UNF	7/16" - 20 UNF	1.61	40.89	0.625	15.88	15,000	103
Y603-4-6C	9/16" - 18 UNF	9/16" - 18 UNF	1.61	40.89	0.625	15.88	15,000	103
Y603-4-8C	9/16" - 18 UNF	3/4" - 16 UNF	1.81	45.97	0.875	22.23	15,000	103
Y603-6-4C	3/4" - 16 UNF	7/16" - 20 UNF	1.84	46.74	0.750	19.05	15,000	103
Y603-6-6C	3/4" - 16 UNF	9/16" - 18 UNF	1.94	49.28	0.750	19.05	15,000	103
Y603-6-8C	3/4" - 16 UNF	3/4" - 16 UNF	2.04	51.82	0.875	22.23	15,000	103
Y603-9-6C	1-1/8" - 12 UNF	9/16" - 18 UNF	2.09	53.09	1.125	28.58	15,000	103
Y603-9-8C	1-1/8" - 12 UNF	3/4" - 16 UNF	2.19	55.63	1.125	28.58	15,000	103

For detailed ordering information, please consult price list or contact Parflex Division.


JIC Adapters

JIC Caps



Part Number	Thread Size	Overall Length		Hex		Max. Working Pressure	
		inch	mm	inch	mm	psi	MPa
#							
10K06-4C-CAP	7/16" - 20 UNF	0.83	21.08	0.75	19.05	15,000	103
10K06-6C-CAP	9/16" - 18 UNF	0.93	23.62	0.875	22.23	15,000	103
10K06-8C-CAP	3/4" - 16 UNF	1.04	26.42	1.00	25.40	15,000	103
10K06-10C-CAP	7/8" - 14 UNF	1.16	29.46	1.25	31.75	10,000	69
10K06-12C-CAP	1-1/16" - 12 UNF	1.31	33.27	1.50	38.10	10,000	69

JIC Plugs



Part Number	Thread Size	A Overall Length		Hex		Max. Working Pressure	
		inch	mm	inch	mm	psi	MPa
#							
10KP03-4C	7/16" - 20 UNF	0.81	20.57	0.5	12.70	10,000	69
10KP03-6C	9/16" - 18 UNF	0.85	21.59	0.625	15.88	10,000	69
10KP03-8C	3/4" - 16 UNF	0.95	24.13	0.812	20.62	10,000	69
10KP03-10C	7/8" - 14 UNF	1.11	28.19	0.937	23.80	10,000	69
10KP03-16C	1-5/16" - 12 UNF	1.34	34.04	1.375	34.93	10,000	69

Valves

Medium Pressure — up to 20K psi

High Pressure — up to 60K psi



Developed to assure safe and easy plumbing through 60,000 psi, these needle valves are engineered to the highest standards of repeatable quality. The medium pressure valves are designed with a compact, cone-and-threaded connection which permits the larger bore sizes and increased flow rates common in this pressure class. The high pressure valves also use a cone-and-threaded connection which accommodates the high pressures common in these applications.

Non-rotating tip stems are standard for on-off service and ensure long life of valve seats.

Materials include high tensile Type 316 stainless steel bodies and hardened 17-4PH stainless steel lower section stems.

Standard packing is TFE with optional Viton®, BUNA-N and Grafoil available as non-standard.

Two-way straight valves are standard with five additional patterns available to satisfy a wide variety of requirements.

Features:

- Non-rotating stem tips
- Packing below stem threads
- Type 316 as high tensile bodies
- Positive gland lock device
- No stem adjustment needed
- Black T-handles are standard; choice of 4 colors available for special order
- Tube sizes:
 - Medium pressure — 1/4" through 1"
 - High pressure — 1/4" through 9/16"

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-46

Medium Pressure Valves


SV5Y — Two-way Straight Valves, Medium Pressure (20K psi)



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
SV5Y-4C-20*	1/4" M.P.	0.51	1.37	7.00	3.00	0.75	1.50	3.75	0.62	1.75	0.43	20,000	138
SV5Y-6C-20	3/8" M.P.	0.68	1.75	8.42	4.12	0.87	1.81	4.62	1.12	2.50	0.56	20,000	138
SV5Y-9C-20	9/16" M.P.	0.10	0.75	4.37	2.00	0.37	0.81	2.00	0.37	1.25	0.21	20,000	138
SV5Y-12C-20*	3/4" M.P.	0.20	0.75	4.37	2.00	0.37	0.81	2.00	0.37	1.25	0.21	20,000	138
SV5Y-16C-20*	1" M.P.	0.31	1.00	6.12	2.50	0.50	1.12	2.87	0.50	1.37	0.34	20,000	138

*Non-standard part - may require longer lead time


AV5Y — Two-way Angle Valves, Medium Pressure (20K psi)



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
AV5Y-4C-20	1/4" M.P.	0.10	0.75	4.81	2.00	1.00	1.25	2.43	0.37	1.25	0.21	20,000	138
AV5Y-6C-20	3/8" M.P.	0.20	0.75	4.81	2.00	1.00	1.25	2.43	0.37	1.25	0.21	20,000	138
AV5Y-9C-20	9/16" M.P.	0.31	1.00	6.62	2.50	1.25	1.62	3.37	0.50	1.37	0.34	20,000	138
AV5Y-12C-20	3/4" M.P.	0.51	1.37	7.50	3.00	1.50	2.00	4.25	0.62	1.75	0.43	20,000	138
AV5Y-16C-20*	1" M.P.	0.68	1.75	9.37	4.12	2.06	2.56	5.43	1.12	2.50	0.56	20,000	138

*Non-standard part - may require longer lead time

TV25Y — Three-way Valves, Medium Pressure (20K psi) Two Pressure Connections




Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
TV25Y-4C-20*	1/4" M.P.	0.10	0.75	5.00	2.00	1.00	1.43	2.62	0.37	1.25	0.21	20,000	138
TV25Y-6C-20*	3/8" M.P.	0.20	0.75	5.00	2.00	1.00	1.43	2.62	0.37	1.25	0.21	20,000	138
TV25Y-9C-20	9/16" M.P.	0.31	1.00	6.87	2.50	1.25	1.87	3.62	0.50	1.37	0.34	20,000	138
TV25Y-12C-20*	3/4" M.P.	0.51	1.37	7.87	3.00	2.62	2.37	4.62	0.62	1.75	0.43	20,000	138
TV25Y-16C-20*	1" M.P.	0.68	1.75	9.75	4.12	2.12	3.06	5.87	1.12	2.50	0.56	20,000	138

*Non-standard part - may require longer lead time

Medium Pressure Valves


TV15Y — Three-way Valves, Medium Pressure (20K psi) One Pressure Connection



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
TV15Y-4C-20*	1/4" M.P.	0.10	0.75	4.81	2.00	1.25	1.25	2.43	0.37	1.25	0.21	20,000	138
TV15Y-6C-20*	3/8" M.P.	0.20	0.75	4.81	2.00	1.25	1.25	2.43	0.37	1.25	0.21	20,000	138
TV15Y-9C-20*	9/16" M.P.	0.31	1.00	6.62	2.50	1.62	1.62	3.37	0.50	1.37	0.34	20,000	138
TV15Y-12C-20*	3/4" M.P.	0.51	1.37	7.50	3.00	2.00	2.00	4.25	0.62	1.75	0.43	20,000	138
TV15Y-16C-20*	1" M.P.	0.68	1.75	9.37	4.12	2.62	2.62	5.43	1.12	2.50	0.56	20,000	138

*Non-standard part - may require longer lead time

CV5Y— Medium Pressure Ball Check Valves




Part Number	Connection Size	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
CV5Y-4C-20*	1/4" M.P.	3.75	95.25	1.00	25.40	20,000	138
CV5Y-6C-20	3/8" M.P.	3.75	95.25	1.00	25.40	20,000	138
CV5Y-9C-20	9/16" M.P.	0.35	8.89	1.37	34.80	20,000	138

*Non-standard part - may require longer lead time


High Pressure Valves

SV6Y — Two-way Straight Valves, High Pressure (30K/60K psi)



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
SV6Y-4C-30	1/4" H.P.	0.09	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	30,000	207
SV6Y-6C-30	3/8" H.P.	0.12	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	30,000	207
SV6Y-9C-30	9/16" H.P.	0.12	1.50	5.62	2.62	1.00	1.43	2.87	0.50	1.37	0.21	30,000	207
SV6Y-4C-60	1/4" H.P.	0.06	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	60,000	414
SV6Y-6C-60	3/8" H.P.	0.06	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	60,000	414
SV6Y-9C-60	9/16" H.P.	0.06	1.50	5.62	2.62	1.00	1.43	2.87	0.50	1.37	0.21	60,000	414


AV6Y — Two-way Angle Valves, High Pressure (30K/60K psi)



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
AV6Y-4C-30	1/4" H.P.	0.09	1.00	5.18	2.00	1.00	1.00	2.43	0.50	1.37	0.21	30,000	207
AV6Y-6C-30	3/8" H.P.	0.12	1.00	5.56	2.00	1.00	1.37	2.81	0.50	1.37	0.21	30,000	207
AV6Y-9C-30	9/16" H.P.	0.12	1.50	5.62	2.62	1.31	1.43	2.87	0.50	1.37	0.21	30,000	207
AV6Y-4C-60	1/4" H.P.	0.06	1.00	5.18	2.00	1.00	1.00	2.43	0.50	1.37	0.21	60,000	414
AV6Y-6C-60	3/8" H.P.	0.06	1.00	5.56	2.00	1.00	1.37	2.81	0.50	1.37	0.21	60,000	414
AV6Y-9C-60*	9/16" H.P.	0.06	1.50	5.62	2.62	1.31	1.43	2.87	0.50	1.37	0.21	60,000	414

*Non-standard part - may require longer lead time

TV26Y — Three-way Valves, High Pressure (30K/60K psi) Two Pressure Connections




Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
TV26Y-4C-30*	1/4" H.P.	0.09	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	30,000	207
TV26Y-6C-30*	3/8" H.P.	0.12	1.00	5.56	2.00	1.00	1.37	2.81	0.50	1.37	0.21	30,000	207
TV26Y-9C-30*	9/16" H.P.	0.12	1.50	6.06	2.62	1.43	1.87	3.31	0.50	1.37	0.21	30,000	207
TV26Y-4C-60*	1/4" H.P.	0.06	1.00	5.18	2.00	0.62	1.00	2.43	0.50	1.37	0.21	60,000	414
TV26Y-6C-60*	3/8" H.P.	0.06	1.00	5.56	2.00	1.00	1.37	2.81	0.50	1.37	0.21	60,000	414
TV26Y-9C-60*	9/16" H.P.	0.06	1.50	6.06	2.62	1.43	1.87	2.87	0.50	1.37	0.21	60,000	414

*Non-standard part - may require longer lead time

High Pressure Valves


TV16Y — Three-way Valves, High Pressure (30K/60K psi) One Pressure Connection



Part Number	Connection Size	Orifice	Thickness	D	E	F	G	H	J	K	L	Max. Working Pressure	
#													
				inch	inch	inch	inch	inch	inch	inch	inch	psi	MPa
TV16Y-4C-30*	1/4" H.P.	0.09	1.00	5.18	2.00	1.00	1.00	2.43	0.50	1.37	0.21	30,000	207
TV16Y-6C-30*	3/8" H.P.	0.12	1.00	5.56	2.00	2.00	1.43	2.81	0.50	1.37	0.21	30,000	207
TV16Y-9C-30*	9/16" H.P.	0.12	1.50	5.62	2.62	2.18	1.43	2.87	0.50	1.37	0.21	30,000	207
TV16Y-4C-60*	1/4" H.P.	0.06	1.00	5.18	2.00	1.00	1.00	2.43	0.50	1.37	0.21	60,000	414
TV16Y-6C-60	3/8" H.P.	0.06	1.00	5.56	2.00	2.00	1.43	2.81	0.50	1.37	0.21	60,000	414
TV16Y-9C-60*	9/16" H.P.	0.06	1.50	5.62	2.62	2.18	1.43	2.87	0.50	1.37	0.21	60,000	414

*Non-standard part - may require longer lead time

CV6Y— High Pressure Ball Check Valves



Part Number	Connection Size	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
CV6Y-4C-60	1/4" H.P.	4.18	106.17	1.50	38.10	60,000	414
CV6Y-6C-60*	3/8" H.P.	4.25	107.95	1.50	38.10	60,000	414
CV6Y-9C-60	9/16" H.P.	4.62	117.35	1.56	39.62	60,000	414

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-50

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Notes

This image shows a single page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, leaving small margins at the top and bottom. There are no vertical margin lines, and the page contains no handwriting or other markings.

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Quick Couplings

Rogan Series Couplings

C-Series Hydraulic Couplings



Table of Contents

Introduction

Quick Coupling Nomenclature	D-2
-----------------------------------	-----

Quick Couplings

Rogan Series	D-4
HP006 Coupler	D-5
HP006 Nipple w/o Check Valve	D-6
HP006 Nipple w/ Check Valve	D-7
HP010 Coupler	D-8
HP010 Nipple w/o Check Valve	D-9
HP010 Nipple w/ Check Valve	D-10
C Series	D-11
115 Coupler	D-12
115 Nipple	D-13
116 Coupler	D-14
116 Nipple	C-15
125 Coupler	D-16
125 Nipple	D-16
Quick Coupling Adapters	D-17

Quick Coupling Nomenclature

Quick Coupling Part Numbers

The part number description given to the Rogan Series (Walther Quick Couplings) is as follows:

Example: HP006-0-NMC

HP006-0-NMC – **Thru Hole Size** (HP006 = .24", or 6mm, nominal thru hole diameter)
 HP006-**0**-NMC – **Component Type** (0 = Female coupler with check valve)
 HP006-0-**N**MC – **Connection Type** (N = NPT)
 HP006-0-N**M**C – **Connection Gender** (M = Male)
 HP006-0-NMC-**C** – **Connection Size** (C = 3/8" NPT)

Thru Hole Size	
HP006	.24", or 6mm , nominal thru hole diameter
HP010	.40", or 10mm , nominal thru hole diameter

Component Type	
0	Female coupler with check valve
1	Male nipple w/o check valve (straight through)
2	Male nipple with check valve

Thread Form					
Connection Type		Connection Gender		Connection Size	
H	High Pressure	M	Male	4	1/4"
L	Medium Pressure	F	Female	6	3/8"
A	Type "M"			9	9/16"
N	NPT			12	3/4"
X	Low Angle Face Seal			16	1"
				B	1/4" NPT
				C	3/8" NPT
				D	1/2" NPT

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



D-2

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Quick Coupling Nomenclature

Quick Coupling Part Numbers

The part number description given to the C Series couplings* is as follows:

Example: C10-116-1202

C10 -116-1202 – Part Type	(C10 = Coupling Component)
C10- 116 -1202 – Series	(116 = Max. Working Pressure of 21,760 psi)
C10-116- 1 202 – Component Type	(1 = Coupler)
C10-116-1 2 02 – Connection	(2 = BSP)
C10-116-12 0 2 – Gender	(0 = Female)
C10-116-120 2 – Size	(2 = 1/4")

Part Type	
C10	Coupling component
C19	Adapter

Series	
115	Working pressure of 14,500 psi (100 MPa)
116	Working pressure of 21,760 psi (150 MPa)
125	Working pressure of 29,000 psi (200 MPa)
950	Adapters only - Working pressures up to 43,500 psi (300 MPa)

Part Type - Couplings only, not applicable to adapters	
1	Coupler
6	Nipple
5	Nipple w/o Check Valve

Thread Form - Couplings only, not applicable to adapters					
Connection Type		Connection Gender		Connection Size	
2	BSP	5	Male	1	1/8"
4	NPT	0	Female	2	1/4"
		2	Female w/ built-in locking device	4	3/8"

*This description is for couplings only. The part numbers for quick coupling adapters will deviate from this structure.

Rogan Series



Rogan series quick couplings are versatile connecting devices that permit easy and rapid joining of hose assemblies to your system. Each coupling is assembled and pressure tested to at least 5,000 psi above its maximum rated working pressure. Couplings with check-valves can withstand the full working pressure in the disconnected condition. The standard seal material is Nitrile, however, Viton, EPDM and FFKM are also available.

Type	Max. Working Pressure (psi)	Test Pressure (psi)	Nominal Thru Hole Diameter (in)
HP006	30,000	35,000	0.24
HP010	20,000	25,000	0.40

Note: The choice of the threaded end form may limit the working pressure and the size of the thru hole in the coupling. Call **polyflex** for additional information.

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



D-4

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D

Accessories
E




General Technical
F

Rogan Series Quick Couplings

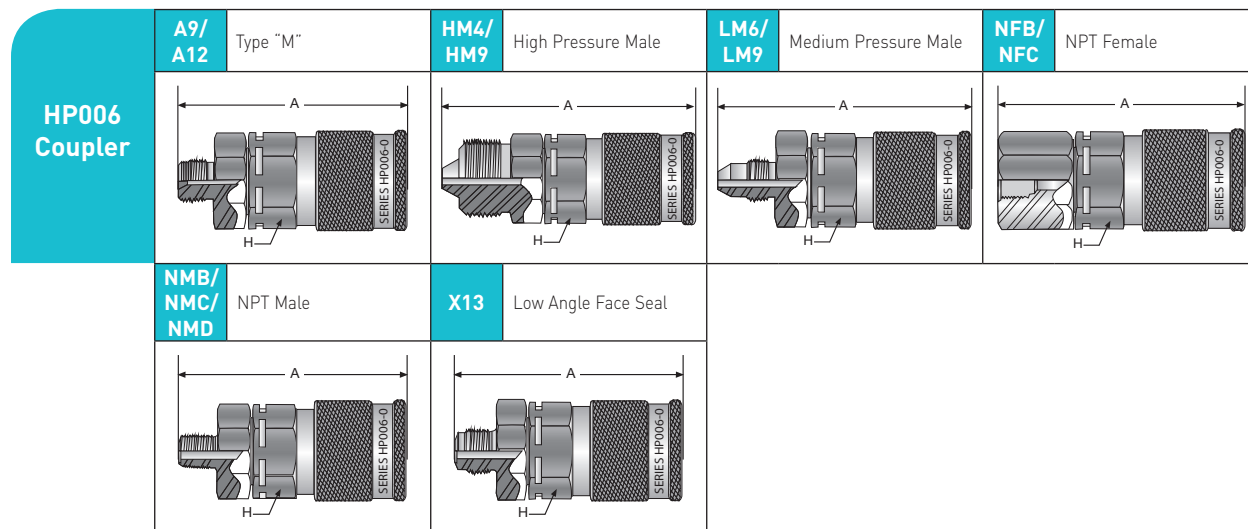HP006 Couplers — Visual Index




HP006 Coupler




Part Number	Thread Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP006-0-A9	Type "M" (9/16" - 18)	3.30	83.82	1.19	30.23	30,000	207
HP006-0-A12	Type "M" (3/4" - 16)	3.34	84.84	1.19	30.23	30,000	207
HP006-0-HM4	1/4" High Pressure Male	3.46	87.88	1.19	30.23	30,000	207
HP006-0-HM9	9/16" High Pressure Male	3.70	93.98	1.19	30.23	30,000	207
HP006-0-LM6	3/8" Medium Pressure Male	3.54	89.92	1.19	30.23	20,000	138
HP006-0-NFB	1/4" NPT Female	3.30	83.82	1.19	30.23	15,000	103
HP006-0-NFC	3/8" NPT Female	3.30	83.82	1.19	30.23	15,000	103
HP006-0-NMB	1/4" NPT Male	3.40	86.36	1.19	30.23	15,000	103
HP006-0-NMC	3/8" NPT Male	3.30	83.82	1.19	30.23	15,000	103
HP006-0-NMD	1/2" NPT Male	3.45	87.63	1.19	30.23	15,000	103
HP006-0-X13	Low Angle Face Seal (9/16" - 18)	3.37	85.60	1.19	30.23	30,000	207
Construction: Alloy steel							

Rogan Series Quick Couplings

HP006 Nipple w/o Check Valve — Visual Index

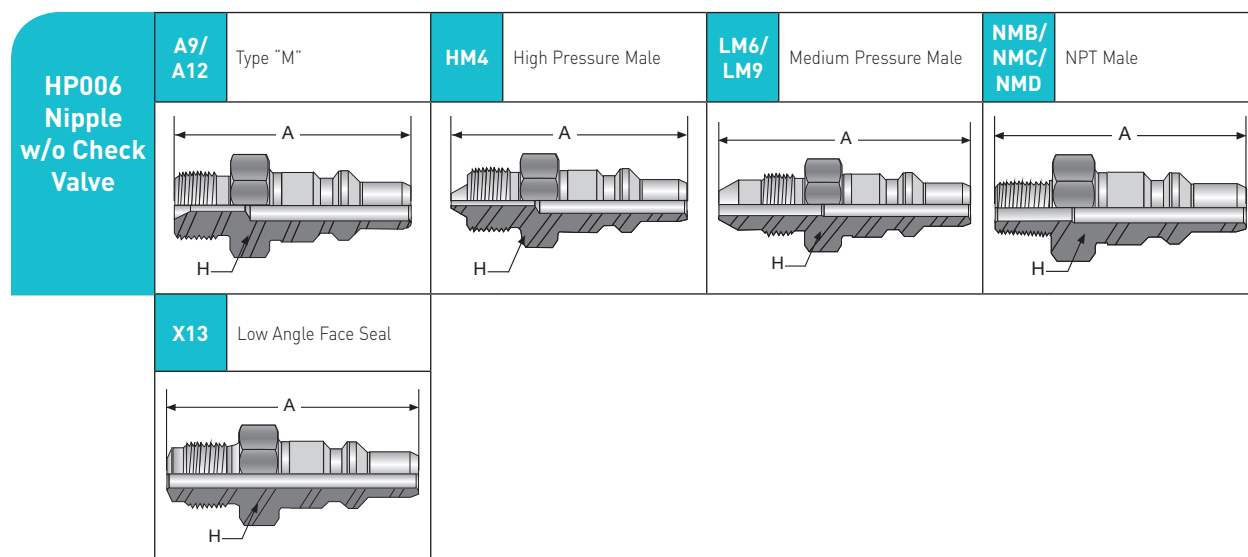


HP006 Nipple w/o Check Valve

Part Number	Thread Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP006-1-A9	Type "M" (9/16" - 18)	1.98	50.29	0.75	19.05	30,000	207
HP006-1-A12	Type "M" (3/4" - 16)	2.16	54.86	0.87	22.10	30,000	207
HP006-1-HM4	1/4" High Pressure Male	2.25	57.15	0.75	19.05	30,000	207
HP006-1-LM6	3/8" Medium Pressure Male	2.33	59.18	0.75	19.05	20,000	138
HP006-1-LM9	9/16" Medium Pressure Male	2.57	65.28	1.00	25.40	20,000	138
HP006-1-NMB	1/4" NPT Male	2.09	53.09	0.75	19.05	15,000	103
HP006-1-NMC	3/8" NPT Male	2.13	54.10	0.75	19.05	15,000	103
HP006-1-NMD	1/2" NPT Male	2.31	58.67	1.00	25.40	15,000	103
HP006-1-X13	Low Angle Face Seal (9/16" - 18)	2.17	55.12	0.75	19.05	30,000	207
Construction: Alloy steel							




For detailed ordering information, please consult price list or contact Parflex Division.

Rogan Series Quick Couplings

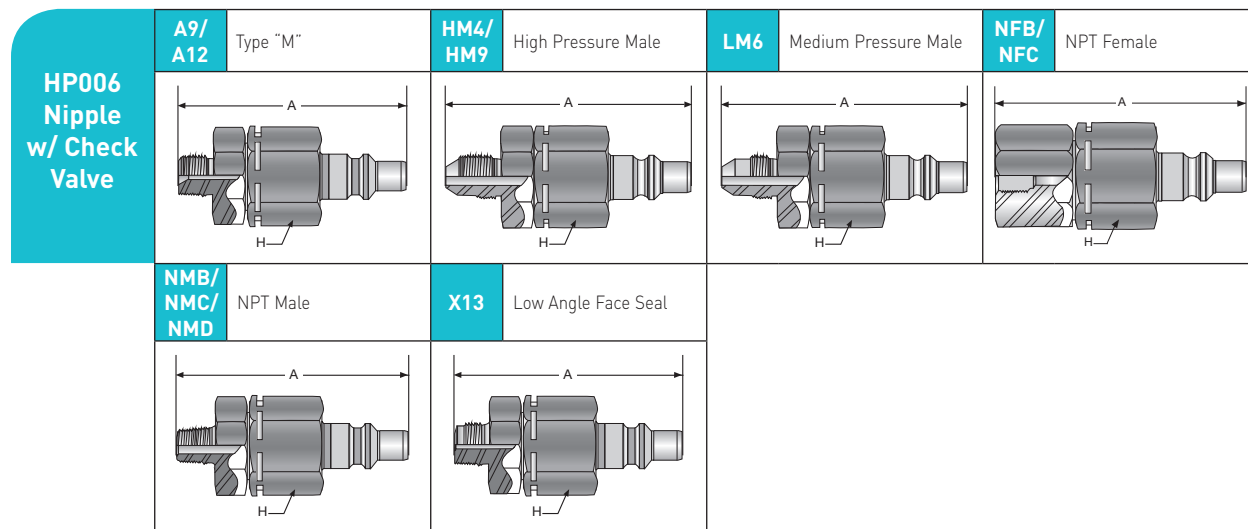HP006 Nipple w/ Check Valve — Visual Index




HP006 Nipple w/ Check Valve




Part Number	Thread Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP006-2-A9	Type "M" (9/16" - 18)	3.28	83.31	1.19	30.23	30,000	207
HP006-2-A12	Type "M" (3/4" - 16)	3.30	83.82	1.19	30.23	30,000	207
HP006-2-HM4	1/4" High Pressure Male	3.45	87.63	1.19	30.23	30,000	207
HP006-2-LM6	3/8" Medium Pressure Male	3.52	89.41	1.19	30.23	20,000	138
HP006-2-NFB	1/4" NPT Female	3.26	82.80	1.19	30.23	15,000	103
HP006-2-NFC	3/8" NPT Female	3.25	82.55	1.19	30.23	15,000	103
HP006-2-NMB	1/4" NPT Male	3.34	84.84	1.19	30.23	15,000	103
HP006-2-NMC	3/8" NPT Male	3.34	84.84	1.19	30.23	15,000	103
HP006-2-NMD	1/2" NPT Male	3.43	87.12	1.19	30.23	15,000	103
HP006-2-X13	Low Angle Face Seal (9/16" - 18)	3.35	85.09	1.19	30.23	30,000	207
Construction: Alloy steel							

Rogan Series Quick Couplings

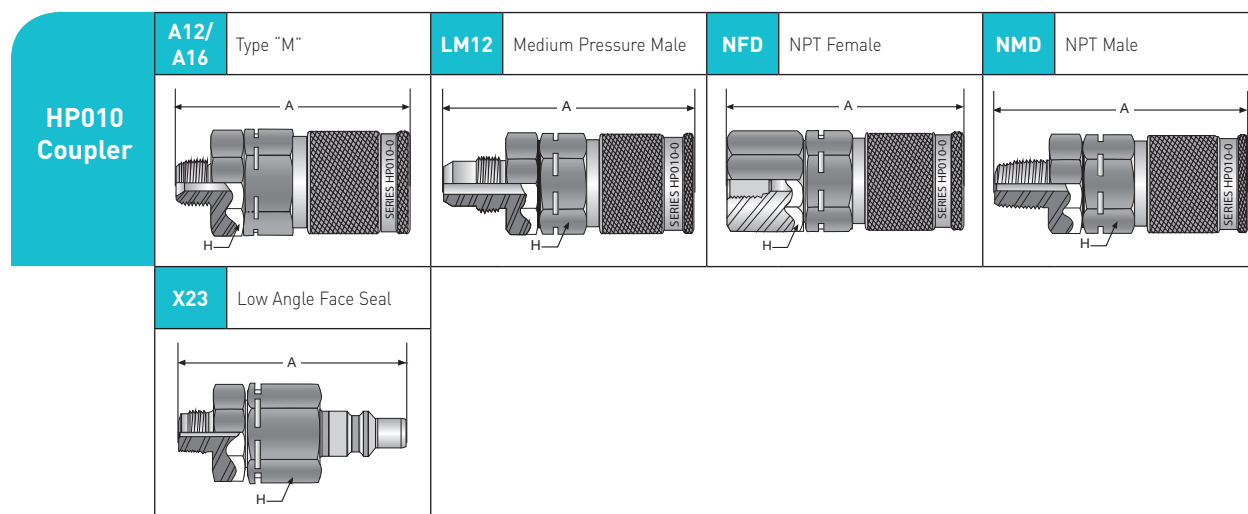HP010 Coupler — Visual Index



HP010 Coupler

Part Number	Thread Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP010-0-A12	Type "M" (3/4" - 16)	4.00	101.60	1.62	41.15	20,000	138
HP010-0-A16	Type "M" (1" - 12)	4.10	104.14	1.62	41.15	20,000	138
HP010-0-LM12	3/4" Medium Pressure Male	4.64	117.86	1.62	41.15	20,000	138
HP010-0-NFD	1/2" NPT Female	4.27	108.46	1.62	41.15	15,000	103
HP010-0-NMD	1/2" NPT Male	4.13	104.90	1.62	41.15	15,000	103
HP010-0-X23	Low Angle Face Seal (3/4" - 16)	4.19	106.43	1.62	41.15	20,000	138
Construction: Alloy steel							

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



D-8

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D

Accessories
E




General Technical
F

Rogan Series Quick Couplings

HP010 Nipple w/o Check Valve — Visual Index

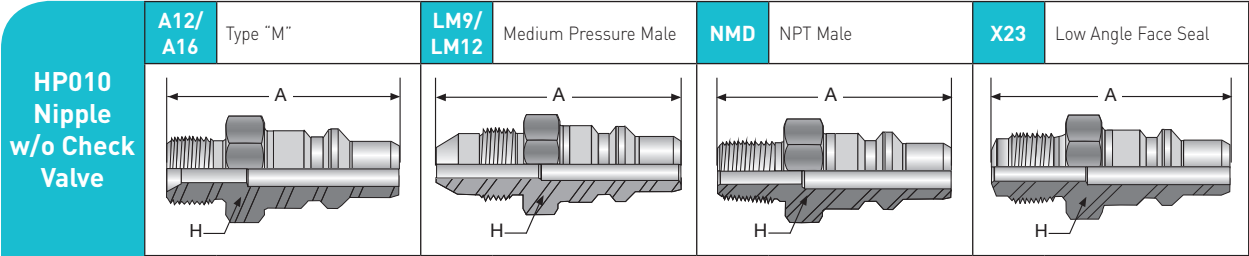


HP010 Nipple w/o Check Valve




Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP010-1-A12	Type "M" (3/4" - 16)	2.40	60.96	1.06	26.92	20,000	138
HP010-1-A16	Type "M" (1" - 12)	2.53	64.26	1.18	29.97	20,000	138
HP010-1-LM9	9/16" Medium Pressure Male	3.12	79.25	1.18	29.97	20,000	138
HP010-1-LM12	3/4" Medium Pressure Male	2.84	72.14	1.06	26.92	20,000	138
HP010-1-NMD	1/2" NPT Male	2.52	64.01	1.06	26.92	15,000	103
HP010-1-X23	Low Angle Face Seal (3/4" - 16)	2.58	65.53	1.06	26.92	20,000	138
Construction: Alloy steel							

Rogan Series Quick Couplings

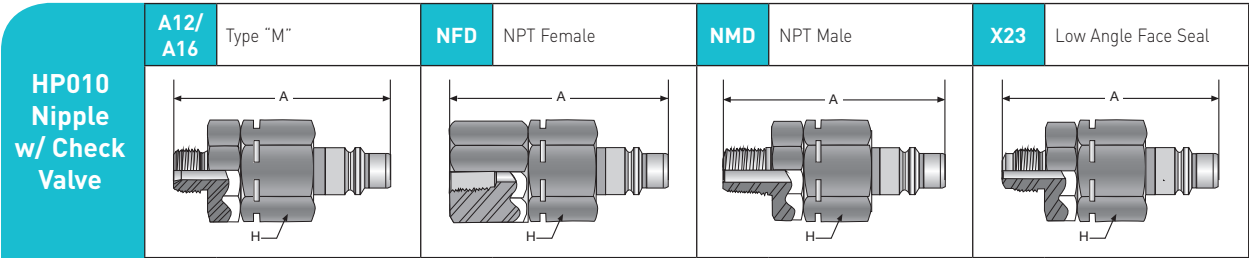HP010 Nipple w/ Check Valve — Visual Index



HP010 Nipple w/ Check Valve

Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
HP010-2-A12	Type "M" (3/4" - 16)	4.00	101.60	1.62	41.15	20,000	138
HP010-2-A16	Type "M" (1" - 12)	4.08	103.63	1.62	41.15	20,000	138
HP010-2-NFD	1/2" NPT Female	4.14	105.16	1.62	41.15	15,000	103
HP010-2-NMD	1/2" NPT Male	4.13	104.90	1.62	41.15	15,000	103
HP010-2-X23	Low Angle Face Seal (3/4" - 16)	4.18	106.17	1.62	41.15	20,000	138
Construction: Alloy steel							

C Series



Features:

- Working pressures up to 29,000 psi
- Non-drip valving for clean, safe, trouble-free performance and minimal air inclusion
- Built-in safety locking device to prevent accidental disconnect
- Wide range of threaded styles: NPT, BSP and "High Pressure"
- Adapters for ease of connection to high pressure hoses and fixed ports
- Thread sizes from 1/8" to 3/8"
- Protective dust caps are included to prevent damage and fluid contamination in disconnected position
- Rugged design and construction for long life in demanding applications

Applications:


- Torque Tensioning
- Stud Tensioning
- Rescue
- Bearing Pullers
- Intensifiers
- Hydrostatic Testing
- Pumps
- Jacks
- Spreaders
- Cable Cutters
- Nut Splitters
- Pipe Coupling Swagers
- Presses
- Clamping Fictures
- Crimpers
- Blow-out Preventors

Type	Max. Working Pressure (psi)	Test Pressure (psi)	Nominal Thru Hole Diameter (in)
C Series 115	14,500	21,800	0.11
C Series 116	21,800	29,200	0.11
C Series 125	29,800	36,300	0.11

Note: The choice of the threaded end form may limit the working pressure and the size of the thru hole in the coupling. Call **polyflex** for additional information.

C Series Quick Couplings

115 Coupler — Visual Index

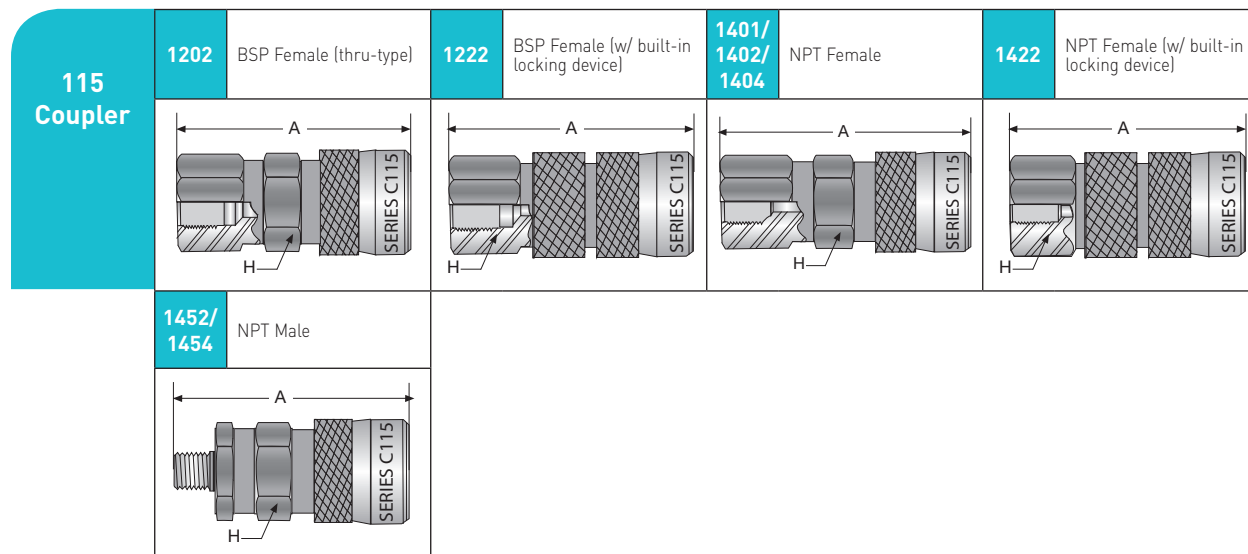

115 Coupler


Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-115-1202	1/4" BSP Female (thru type)	2.30	58.42	0.94	23.88	14,500	100
C10-115-1222	1/4" BSP Female (with built-in locking device)	2.30	58.42	0.94	23.88	14,500	100
C10-115-1401	1/8" NPT Female	2.30	58.42	0.94	23.88	14,500	100
C10-115-1402	1/4" NPT Female	2.30	58.42	0.94	23.88	14,500	100
C10-115-1404	3/8" NPT Female	2.38	60.45	0.94	23.88	14,500	100
C10-115-1422	1/4" NPT Female (with built-in locking device)	2.30	58.42	0.94	23.88	14,500	100
C10-115-1452	1/4" NPT Male	2.45	62.23	0.94	23.88	14,500	100
C10-115-1454	3/8" NPT Male	2.45	62.23	0.94	23.88	14,500	100

Construction: All exposed components are made of zinc-plated steel.




For detailed ordering information, please consult price list or contact Parflex Division.

C Series Quick Couplings

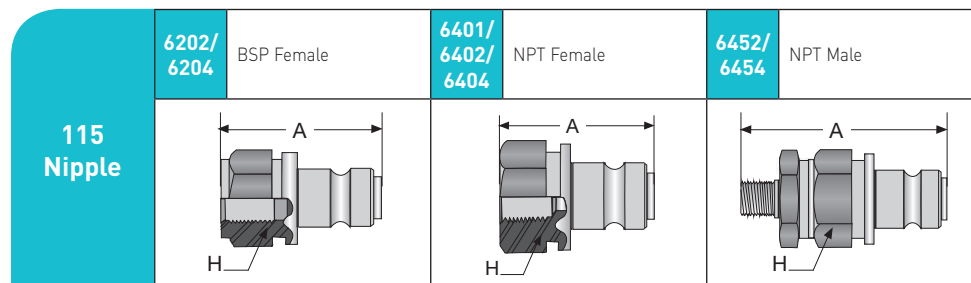115 Nipple — Visual Index




115 Nipple

Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-115-6202	1/4" BSP Female	1.47	37.34	0.87	22.10	14,500	100
C10-115-6204	3/8" BSP Female	1.56	39.62	0.94	23.88	14,500	100
C10-115-6401	1/8" NPT Female	1.42	36.07	0.87	22.10	14,500	100
C10-115-6402	1/4" NPT Female	1.42	36.07	0.87	22.10	14,500	100
C10-115-6404	3/8" NPT Female	1.46	37.08	0.94	23.88	14,500	100
C10-115-6452	1/4" NPT Male	2.40	60.96	0.87	22.10	14,500	100
C10-115-6454	3/8" NPT Male	2.55	64.77	0.94	23.88	14,500	100




Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

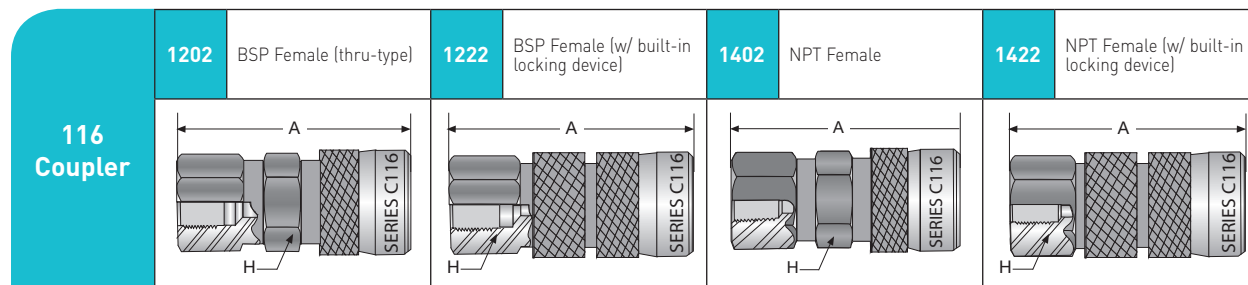116 Coupler — Visual Index






116 Coupler

Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-116-1202	1/4" BSP Female	2.30	58.42	0.94	23.88	21,750	150
C10-116-1222	1/4" BSP Female (with built-in locking device)	2.30	58.42	0.94	23.88	21,750	150
C10-116-1402	1/4" NPT Female	2.30	58.42	0.94	23.88	21,750	150
C10-116-1422	1/4" NPT Female (with built-in locking device)	2.30	58.42	0.94	23.88	21,750	150


Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

116 Nipple — Visual Index


116 Nipple	5202	BSP Female (thru-type)	6202	BSP Female	6402	NPT Female
						

116 Nipple

Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-116-5202	1/4" BSP Female (thru type)	1.47	37.34	0.87	22.10	21,750	150
C10-116-6202	1/4" BSP Female	1.47	37.34	0.87	22.10	21,750	150
C10-116-6402	1/4" NPT Female	1.41	35.81	0.87	22.10	21,750	150
Construction: All exposed components are made of zinc-plated steel.							

C Series Quick Couplings

125 Coupler and 125 Nipple — Visual Index

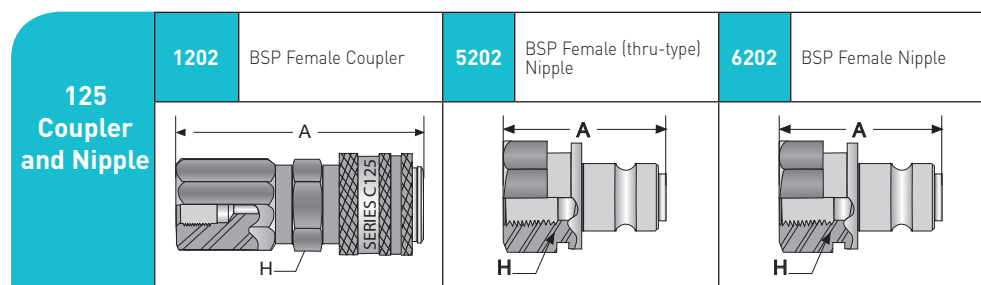

125 Coupler











Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-125-1202	1/4" BSP Female	2.65	67.31	0.94	23.88	29,000	200
Construction: All exposed components are made of zinc-plated steel.							

125 Nipple




Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C10-125-5202	1/4" BSP Female (thru type)	1.50	38.10	0.87	22.10	29,000	200
C10-125-6202	1/4" BSP Female	1.50	38.10	0.87	22.10	29,000	200
Construction: All exposed components are made of zinc-plated steel.							

C Series Quick Couplings

Quick Coupling Adapters — Visual Index

Quick Coupling Adapters	1680 BSP 120° external cone x H.P. Male	0029 BSP 120° external cone x UNF Hose	0062/0064 Rubber Metal Seal	1600 BSP 120° external cone Blind Plug
				
	1601 BSP x BSP 120° external cone	1602 BSP 120° external cone x BSP 60° internal cone	1622 BSP x BSP with 60° internal cone	1623 NPT Male x BSP with 60° internal cone
				
	1680 Porting Block	HAHM BSP with 60° internal cone x H.P. Male		
				

Quick Coupling Adapters

Part Number	Connection Type	A Overall Length		H Hex		Max. Working Pressure	
#							
		inch	mm	inch	mm	psi	MPa
C09-125-1680	1/4" BSP 120° external cone x 1/4" HP Male	1.72	43.69	0.67	17.02	29,000	200
C19-950-0029	1/4" BSP 120° external cone x 9/16" UNF	1.48	37.59	0.67	17.02	29,000	200
C19-950-0062	1/4" Rubber Metal Seal	0.08	2.03	0.81	20.57	14,500	100
C19-950-0064	3/8" Rubber Metal Seal	0.08	2.03	0.94	23.88	14,500	100
C19-950-1600	1/4" BSP 120° external cone Blind Plug	1.07	27.18	0.67	17.02	29,000	200
C19-950-1601	1/4" BSP x 1/4" BSP 120° external cones	1.76	44.70	0.08	2.03	29,000	200
C19-950-1602	1/4" BSP 120° external cone x 1/4" BSP 60° internal cone	1.54	39.12	0.83	21.08	29,000	200
C19-950-1622	1/4" BSP x 1/4" BSP with 60° internal cone	1.25	31.75	0.83	21.08	29,000	200
C19-950-1623	1/4" NPT Male x 1/4" BSP with 60° internal cone	1.27	32.26	0.83	21.08	14,500	100
C19-950-1680	Porting Block	1.8	45.72	N/A	N/A	29,000	200
HAHM4BM4	1/4" BSP with 60° internal cone x 1/4" HP Male	1.47	37.34	0.83	21.08	30,000	207

Construction: All C19 part numbers are manufactured with black zinc-plated steel.

Accessories



Heavy Duty Abrasion Covers

Spring Guards

Containment and Support Grips

Bend Restrictors

Pressure Containment Shields

Anti-Gall Lubricant

Dies



Table of Contents

Accessories

Heavy Duty Abrasion Cover	E-2
Heavy Duty Abrasion Cover Sleeves.....	E-2
Spring Guards	E-2
Bend Restrictors.....	E-2
Containment Grips	E-3
Support Grips.....	E-3
Dies	E-3
Warning Tags.....	E-3
Pressure Containment Shield.....	E-4
Anti-Gall Lubricant	E-4

Accessories

Heavy Duty Abrasion Cover and Cover Sleeves



Part Number	Size I.D. (inch)	Size O.D. (inch)	Material	Reinforcement	Bend Radius (inch)	Weight (lbs/ft)	Cover Sleeves	Cover Sleeve Material
MHDC010	5/8	0.820	Clear Vinyl	Fiber Braid	3.0	0.15	508-J-500-10	Carbon Steel
MHDC012	3/4	0.938	Clear Vinyl	White PVC Helix	3.0	0.20	510-A-500-12	Aluminum
MHDC016	1	1.250	Clear Vinyl	White PVC Helix	3.0	0.27	216-200-18	Carbon Steel
MHDC018	1-1/8	1.350	Clear Vinyl	White PVC Helix	3.5	0.29	216-200-18	Carbon Steel
							620-100-18 (w/ 2640N-08)	Aluminum
MHDC024	1-1/2	1.825	Clear Vinyl	White PVC Helix	4.0	0.40	220-200-22	Carbon Steel
MHDC026	1-5/8	1.905	Clear Vinyl	White PVC Helix	4.0	0.52	520-A-500-26	Aluminum
PVC-BLUE-012	3/4	0.938	Clear Vinyl	Blue PVC Helix	3.0	0.20	510-A-500-12	Aluminum
PVC-BLUE-016	1	1.250	Clear Vinyl	Blue PVC Helix	3.0	0.27	216-200-18	Carbon Steel
PVC-BLUE-018	1-1/8	1.375	Clear Vinyl	Blue PVC Helix	3.0	0.29	216-200-18	Carbon Steel
PVC-BLUE-024	1-1/2	1.780	Clear Vinyl	Blue PVC Helix	5.0	0.40	220-200-22	Carbon Steel
PVC-ORANGE-012	3/4	0.938	Clear Vinyl	Orange PVC Helix	3.0	0.20	510-A-500-12	Aluminum
PVC-ORANGE-016	1	1.250	Clear Vinyl	Orange PVC Helix	3.0	0.27	216-200-18	Carbon Steel

Spring Guards



Part Number	Size (I.D.)	Size (O.D.)	Length (in)	Material	Designated Hose Series
MSG060	0.61	0.77	300.00	Stainless Steel	2440N-04
MSG2006	0.61	0.77	6.30	Carbon Steel	2245N-04
MSG2106	0.63	0.89	7.87	Carbon Steel	2380N-04
MSG4113	0.90	1.27	18.00	Carbon Steel	-08 Hose Sizes
MSG4120	1.45	1.89	20.00	Stainless Steel	2440N-12
MSG4125	1.21	1.65	18.00	Stainless Steel	2440N-16

Bend Restrictors



Part Number	I.D. (inch)	O.D. (inch)	Length (inch)	Material
MBR003	0.250"	0.515"	2.33	Molded Vinyl
MBR004	0.250"	0.490"	2.16	Molded Vinyl
MBR008	0.500"	0.800"	6.00	Molded Vinyl
MBR010	0.625"	0.925"	6.00	Molded Vinyl
MBR012	0.770"	1.070"	6.00	Molded Vinyl

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



E-2

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Accessories

Containment Grips



Part Number	Loop Size (inch)	Overall Length (inch)	Material	Breaking Strength (lbs)	Hose Size (O.D.)	Weight (lbs)
MCG001SS	1	25.5	Stainless Steel	2,900	0.38" - 0.69"	0.55
MCG002SS	2	37.5	Stainless Steel	9,400	1.00" - 1.56"	2.20
MCG003SS	1.26	65	Stainless Steel	14,400	1.25" - 1.94"	6.50
MCGHS10-15	0.71	26.18	Galvanized Steel	2,293	0.40" - 0.59"	0.15
MCGHS15-20	0.71	27.17	Galvanized Steel	2,900	0.59" - 0.79"	0.33
MCGHS20-30	0.71	26.97	Galvanized Steel	5,463	0.79" - 1.18"	0.40
MCGHS30-40	0.71	27.56	Galvanized Steel	7,891	1.18" - 1.57"	0.68
MCGHS40-50	0.71	28.54	Galvanized Steel	10,791	1.57" - 1.96"	1.04
MCGHS50-60	0.71	33.46	Galvanized Steel	10,791	1.96" - 2.36"	1.81
MCGHS3295-SS	4.50	81.50	Stainless Steel	49,000	1-1/2" and 2" (Black Eagle)	9.5

Support Grips



Part Number	Loop Size (inch)	Overall Length (inch)	Material	Breaking Strength (lbs)	Hose Size (O.D.)	Weight (lbs)
MK022-03-038	4	9	Tin - Coated Bronze	750	0.63" - 0.74"	0.50
MK022-03-039	4	10	Tin - Coated Bronze	950	0.75" - 0.99"	0.25
MK022-03-041	5	12	Tin - Coated Bronze	1,500	1.00" - 1.24"	0.35
MK022-03-042	5	14	Tin - Coated Bronze	1,500	1.25" - 1.49"	0.40
MK022-03-043	5	15	Tin - Coated Bronze	1,500	1.50" - 1.74"	0.45
MK022-03-045	9	19	Tin - Coated Bronze	3,100	2.25" - 2.49"	1.25

Dies



Part Number	Description	Fitting Series
#		
80C-HP3	Dies for HP3 Fittings	HP
80C-HP4	Dies for HP4 Fittings	HP
80C-HP6	Dies for HP6 Fittings	HP
80C-G03	Dies for HP3 Guards	N/A
80C-G04	Dies for HP4 Guards	N/A
80C-G06	Dies for HP6 Guards	N/A
83C-8X16	2380N-16	8X
83C-9X04	2390N-04	9X
83C-9X08	2390N-08	9X
83C-9X16	2390N-16	9X
83C-F08W	57CR-08	CR
83C-F16W	57CR-16	CR

Warning Tags



Part Number	Description
G214-240	White - General warning tag should be applied to all hoses
G214-245	Yellow - Warning tag for flex lances

Accessories

Pressure Containment Shield



Part Number	I.D. (inch)	O.D. (inch)	Retaining Sleeve	Stiffener	Material	Bend Radius (in)	Weight (lbs/ft)	Designated Hose Series
MHBS012	0.75	1.07	412-400	M55STIF-4 M55STIF-5 M55STIF-6	Rubber	9.5	0.42	2740D-03 and 2840D-03
MHBS016	1.00	1.28	416-400-16	N/A	Rubber	12.0	0.63	2740D-05 and 2840D-05

NOTE: Any assembly sold at a design factor lower than 2.5:1 requires the addition of a pressure containment shield, excluding 2849D.

ThreadMate® Anti-Gall Lubricant



Part Number	Description
#	
MTM04T	4 oz Tube

ThreadMate® is an extreme duty lubricant developed to reduce galling during the assembly of threaded parts.:

ThreadMate® promotes reliable sealing of pipe threads, even at high pressure, by reducing friction and galling during tightening, resulting in higher contact pressures of the sealing surfaces and better metal-to-metal contact.

ThreadMate® reduces the torque needed to make pressure-tight connections and tighten fasteners

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



E-4

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Notes

[illegible]

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

General Technical

Recommended Practices

Hose Selection, Installation and
Maintenance

Dash Size Systems for Hose and
Tubing

Twin/Multi-line Separation
Instructions

Government & Agency Approvals

Chemical Resistance Charts

Technical Data



Table of Contents

Hose Selection, Installation & Maintenance

Selection, Installation and Maintenance of polyflex Hose and Hose Assemblies	F-2
Dash Sizes.....	F-3
Installation Tips	F-4
Selection of Hose Diameter from Flow Rate and Velocity.....	F-5
Determination of Pressure Drop in the Line	F-6
Pressure Drop.....	F-7
Permeability Coefficient	F-16
Recommended Tightening Procedures.....	F-17
Metric Conversion Chart	F-18
Glossary	F-19
General Chemical Resistance Table.....	F-20
Parker Engineering Manual (PFDE-ES29): Technical Matrix for Parker polyflex Offshore Hoses	F-24
Parker Engineering Manual (PFDE-ES28): Recommended Practices for Handling, Maintenance and Inspection of Long Length polyflex Offshore Hose and Hose Assemblies	F-29
Twin Line and Multi-Line Separation Instructions	F-42
Parker Safety Guide	F-43
Offer of Sale	F-47
Part Number Index	F-49

Selection, Installation & Maintenance of **polyflex** Hose and Hose Assemblies

Hoses and hose assemblies have a finite life span which can be affected by many factors. This recommended practice should be read by designers and users of hose to assist them in the proper selection of hose. These guidelines, while not exhaustive, will assist the user in maintaining hydraulic and pneumatic systems.

READ THE PARKER SAFETY GUIDE CONTAINED IN THIS CATALOG IN ITS ENTIRETY.

PART 1 - How to select hose

- **Pressure** - Maximum operating pressure of the hose must be greater than or equal to the system pressure. Pressure surges or system “spikes” in excess of the maximum operating pressure will shorten hose life and must be avoided.
- **Temperature** - Ambient and fluid temperatures must not exceed the hose/fittings rated design temperature. Attempt to route hose away from or shield hose from high temperature sources.
- **Size** - Adequately size hose and fittings to avoid damaging hose with excessive turbulence, or heat build-up, while maintaining proper flow and pressure. (Refer to fluid velocity nomogram on page F-5.)
- **Fluid Compatibility** - Refer to Chemical Compatibility Guide on page F-20 for use of fluids with various materials. If unsure of an application, contact the factory. Additional care must be taken with gaseous applications. (See Safety Guide on page F-43.)
- **Environment** - Conditions such as ozone, UV light, harsh chemicals, salt water, and other airborne contaminants can degrade hose and shorten its life.
- **Length** - Hose length changes with pressure. This, along with equipment movement, must be considered in the system design.
- **Proper couplings** - Always follow manufacturers' specifications and do not mix components of different manufacturers.
- **Mechanical loads** - Conditions such as tensile and side loads, vibration, excessive flexing, and twist will reduce hose life. Use swivel fittings and adaptors to avoid hose twisting. Test the hose if the application is potentially problematic or unusual.
- **Electrical conductivity** - Determine if the hose must be non-conductive to prevent electrical current flow or conductive to dissipate static electricity. Choose hose and fittings accordingly. (See Safety Guide for Electrical Conductivity issues.)

PART 2 - Installation & Maintenance

- **Inspect components** - Check hose for cover cracks, blisters, cleanliness, kinks, cracks or core tube obstructions or other defects. Examine fittings for poor threads, obstructions, cracks, rust. Do not use hose or fittings if these problems exist.
- **Assemble per instructions** - Instructions are available for companies, trained and authorized by Polyflex.
- **Do not exceed specified minimum bend radius** - Use stress relievers to prevent sharp bends at the hose and fitting juncture. These can be spring guards or other stress relieving members.
- **Ensure that hose bends rather than twists with equipment motion.**
- **Use a torque wrench or the flats from finger tight method to properly install port connections.**
- **After installation, eliminate air entrapped in system, pressurize to maximum operating pressure, and check for leaks and proper system function.**
- **After installation, periodically (frequency depends on severity of application and potential risk) inspect the system for the following:**
 - 1. Blistered, degraded, or loose hose covers
 - 2. Stiff, cracked, or charred hose
 - 3. Cuts or abrasion of hose — look for exposed reinforcement
 - 4. Leaks in hose or fittings
 - 5. Damaged or corroded fittings
 - 6. Excessive build up of dirt, grease, oils, etc.
 - 7. Defective or broken accessories (clamping devices, kink guards)
 - 8. Kinks in hoses
 - Upon discovery of any of these items, replace it, repair it, but **DO NOT IGNORE IT!**
- Retest the system after all maintenance procedures.
- Establish replacement schedules based on previous service life, or when failures could result in damage, personal injury, or excessive/unacceptable downtime.

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



F-2

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E


General Technical
F

Dash Sizes


Dash sizes are commonly used to designate hose I.D., plastic tubing and metal tubing O.D. and coupling size. Dash size systems in common use:

Nominal Hose I.D. or Tubing O.D.		Dash number for all polyflex hose	Nominal DN Size
Inch	Millimeter		
3/32	2.0	-012	2
1/8	3.2	-2	3
5/32	4.0	-025 or 2A	4
3/16	4.8	-3	5
1/4	6.3	-4	6
5/16	7.9	-5	8
3/8	9.5	-6	10
13/32	10.3	-6.5	—
1/2	12.7	-8	12
5/8	15.9	-10	16
3/4	19.1	-12	20
7/8	22.2	-14	—
1	25.4	-16	25
1-1/8	28.6	—	—
1-1/4	31.8	-20	32
1-3/8	34.9	—	—
1-1/2	38.1	-24	40
1-13/16	46.0	—	—
2	50.8	-32	50


Installation Tips

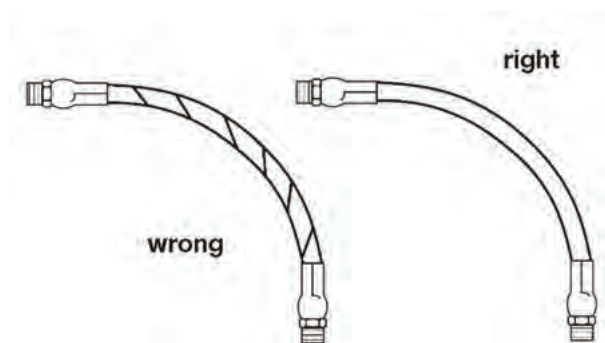


Hose is weakened when installed in twisted position. Also, pressure pulses in twisted hose tend to fatigue wire and loosen fitting connections. Design so that the machine motion produces bending rather than torsion.

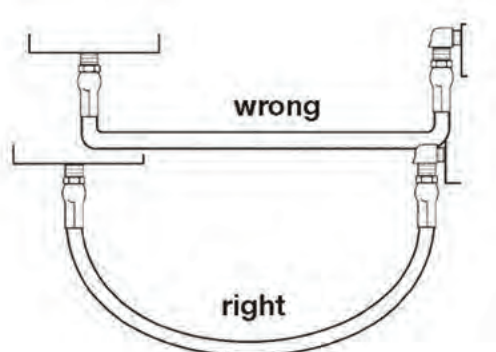

Hose should exit coupling in a straight position rather than side loaded. The minimum bend radius must not be exceeded to avoid kinking of hose and flow restriction.

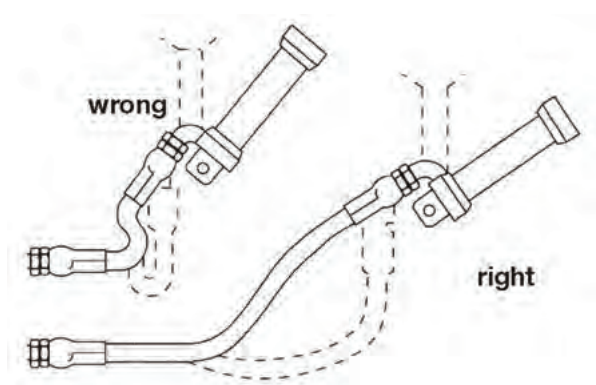


When hose assembly is installed in a flexing applications, remember that metal hose fittings are not part of the flexible portion.

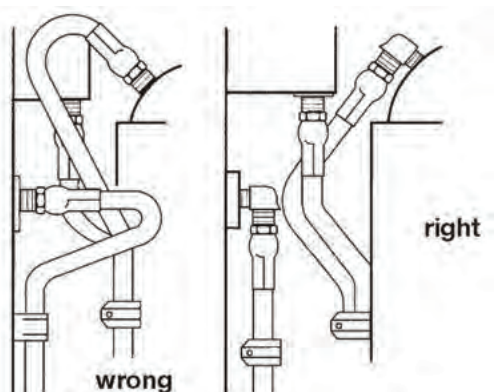


Use elbow or adapters as necessary to eliminate excess hose length and to ensure neater installation and easier maintenance.

Free hose length allowance:

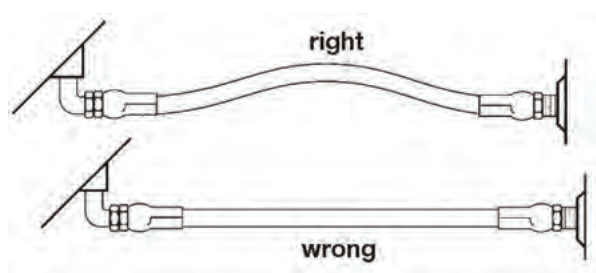

Pressure can change hose in length by as much as $\pm 2\%$. This must be considered when cutting hose to appropriate length.

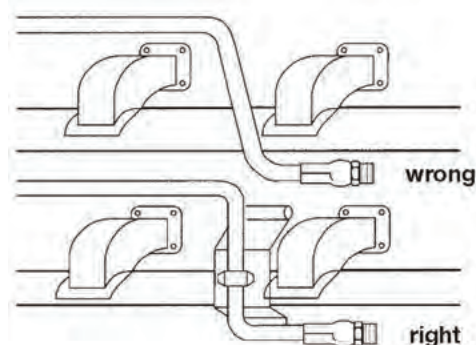

Avoid installing hose assemblies close to heat sources. However, if this should be required, insulate hose.

Selection of Hose Diameter from Flow Rate and Velocity

Flow capacities of Parker hose at recommended flow velocities

The chart below is provided as an aid in the determination of the correct hose size.

Example:


At 10 gallons per minute in the left-hand column and 25 feet per second in the right-hand column (the maximum recommended velocity range for pressure lines). Lay a straight line across these two points. The inside diameter shown in the center column is above -6 so we have to use -8 (1/2").

For suction hose, follow the same procedure except use recommended velocity range for intake lines in the right-hand column.

Where: Q = flow in gallons per minute (gal/min & l/min)

V = velocity in feet per second (f/s & m/s)

d = hose inside diameter (mm & dash size)

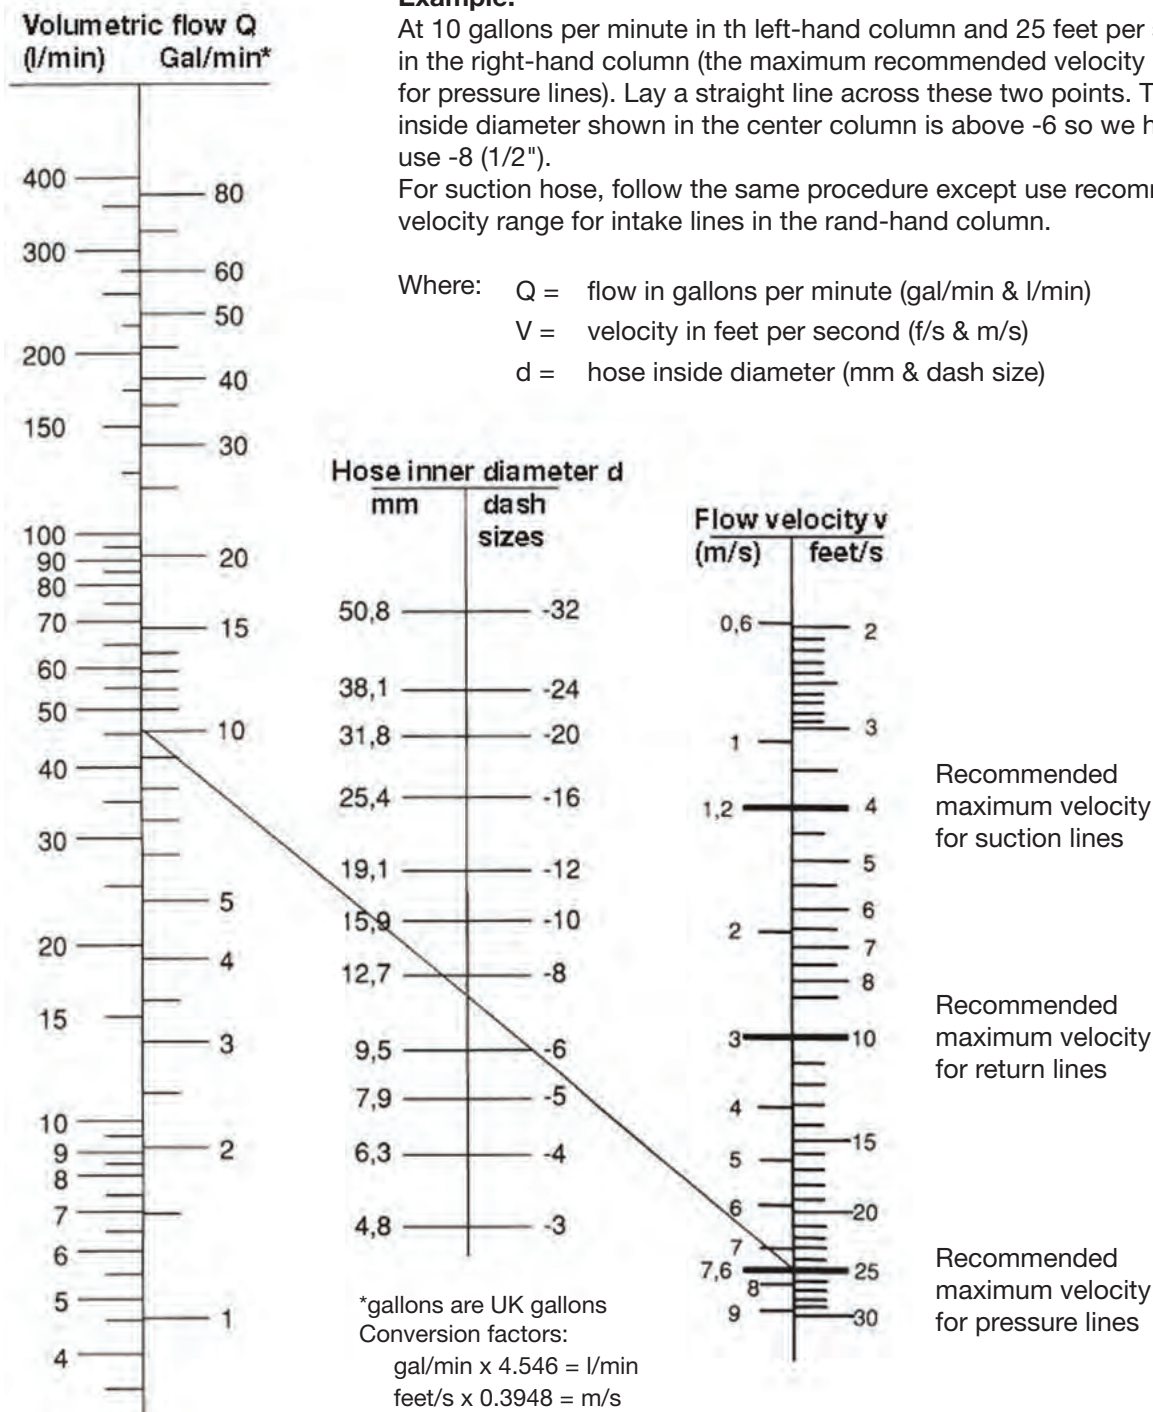

*Recommended velocities are according to hydraulic fluids of maximum viscosity 315 S.S.U. at 38°C working at room temperature within 18°C and 68°C



For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Determination of Pressure Drop in the Line

Velocity: $v = .409 \frac{Q}{d^2} = .509 \frac{W}{pd^2} = \frac{q}{.785d^2}$

Reynold's Number: $Re = 124 \frac{dvp}{\mu} = 6.31 \frac{W}{d\mu} = 378 \frac{qp}{d\mu}$

Pressure Drop, Isothermal, Incompressible Flow (Liquids):

$$\Delta P = .001294 \frac{fLp v^2}{d} = .00000336 \frac{fLW^2}{pd^5} = .0121 \frac{fLq^2}{d^5}$$

Pressure Drop, Isothermal, Compressible, long Lines (Gases and Vapors):

$$\frac{\Delta P}{P_1} = 1 - \sqrt{1 - \frac{fLp v^2}{12g d P_1}}$$

Symbols and Units for Listed Formulas

d = Inside diameter of hose, inches

f = Friction coefficient, dimensionless

g = Gravitational constant, 32.2 ft/sec²

P1 = Input pressure, psi

ΔP = Pressure difference, psi

q = Rate of flow at flowing condition, cu. ft/min

Q = Rate of flow, gals/min

Re = Reynolds number, dimensionless

v = Flow velocity, ft/sec


W = Rate of flow, lbs/hr

p = Weight density of fluid, lbs/cu. ft


μ = Absolute (dynamic) viscosity, centipoises

Pressure Drop vs. Flow

For Size -02 (1/8") (3mm) Hoses

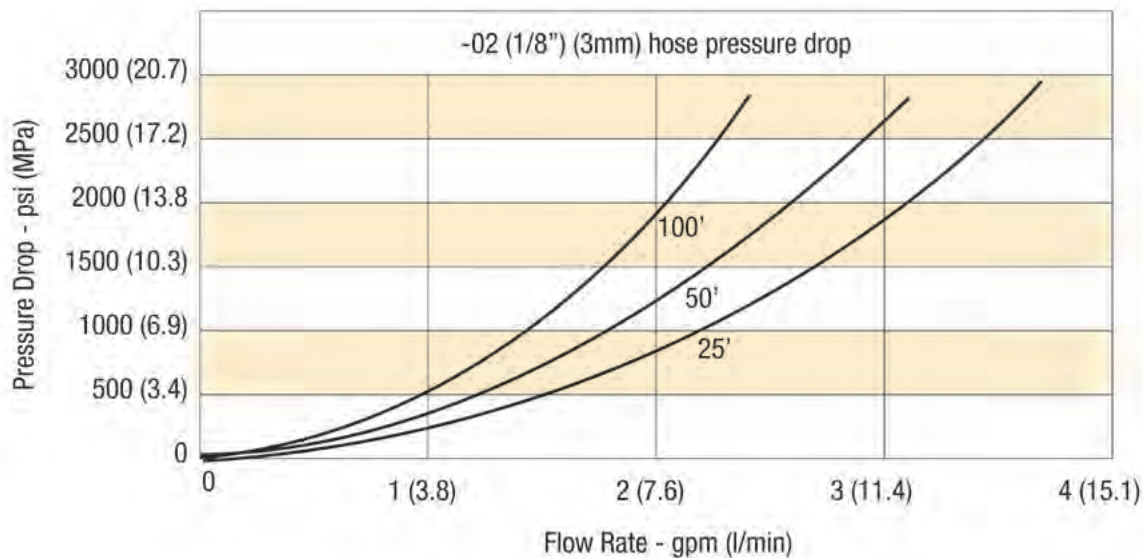


For Size -025 (5/32") (4mm) Hoses

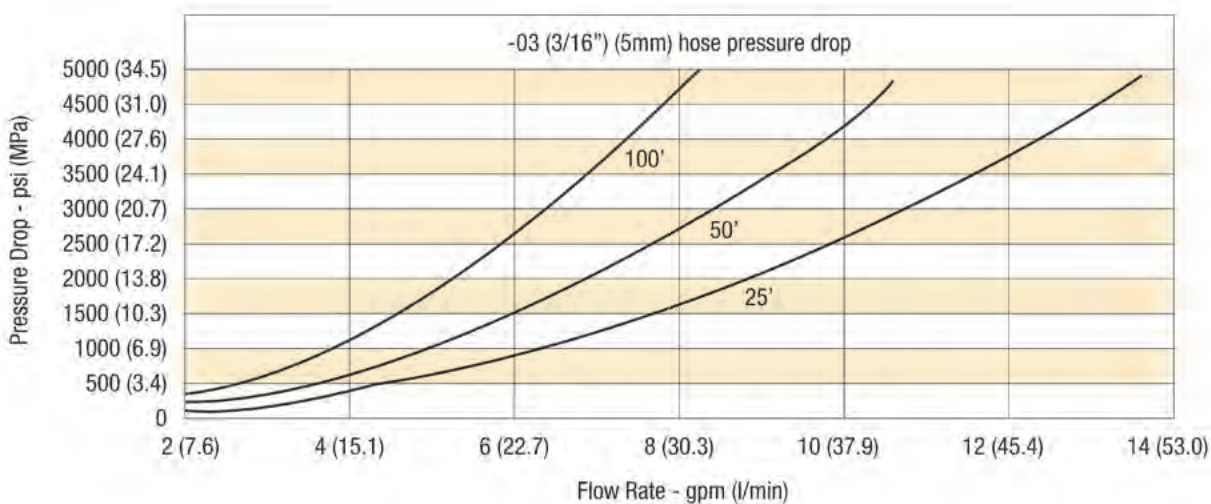


Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.

Pressure Drop vs. Flow

For Size -03 (3/16") (5mm) Hoses

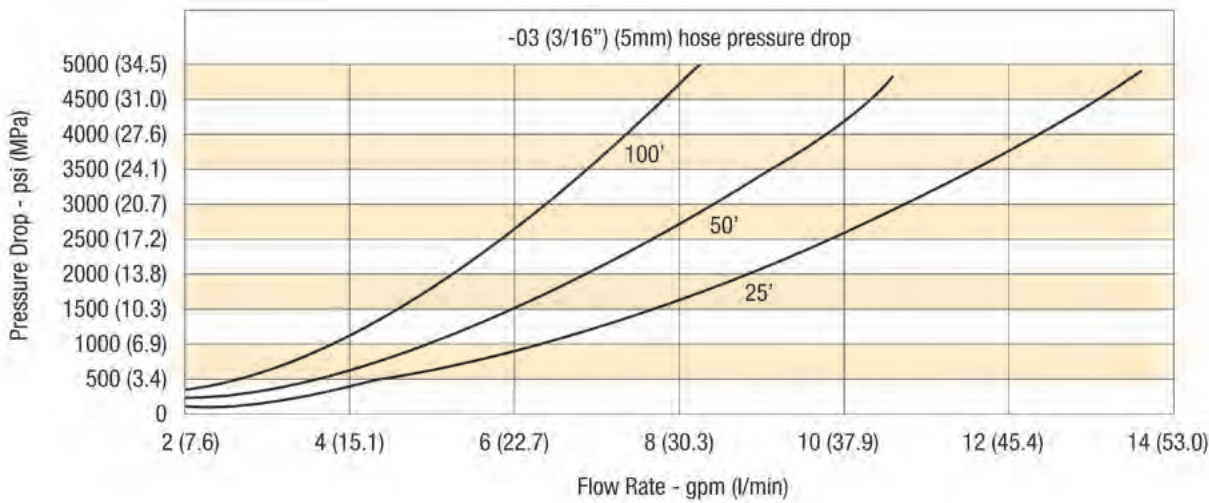

For Hose 2840D-03

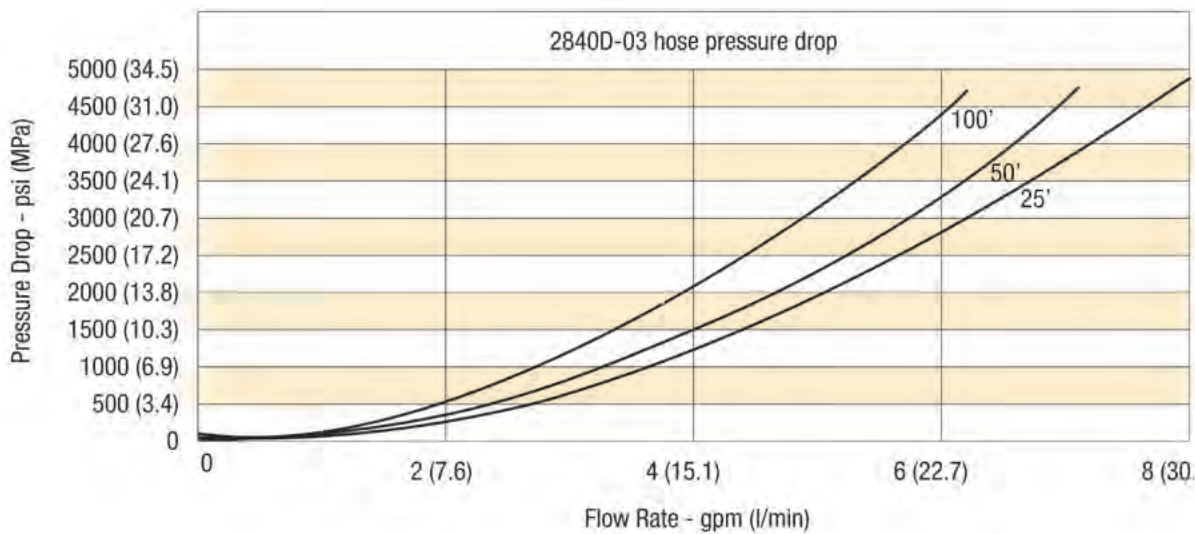

Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.


For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




Pressure Drop vs. Flow

For Size -04 (1/4") (6mm) Hoses

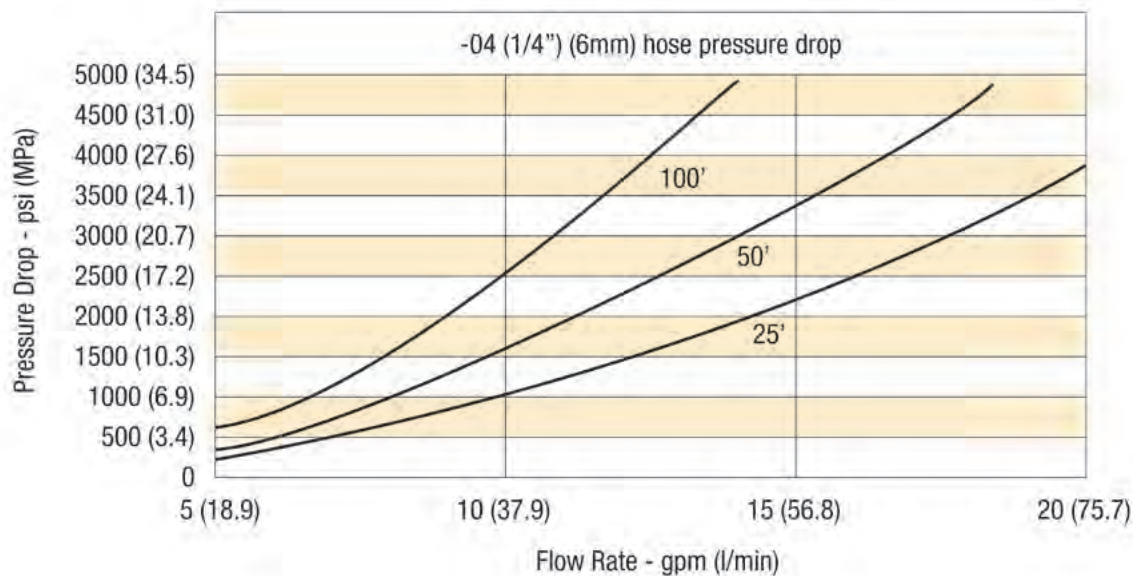


For Size -05 (5/16") (8mm) Hoses

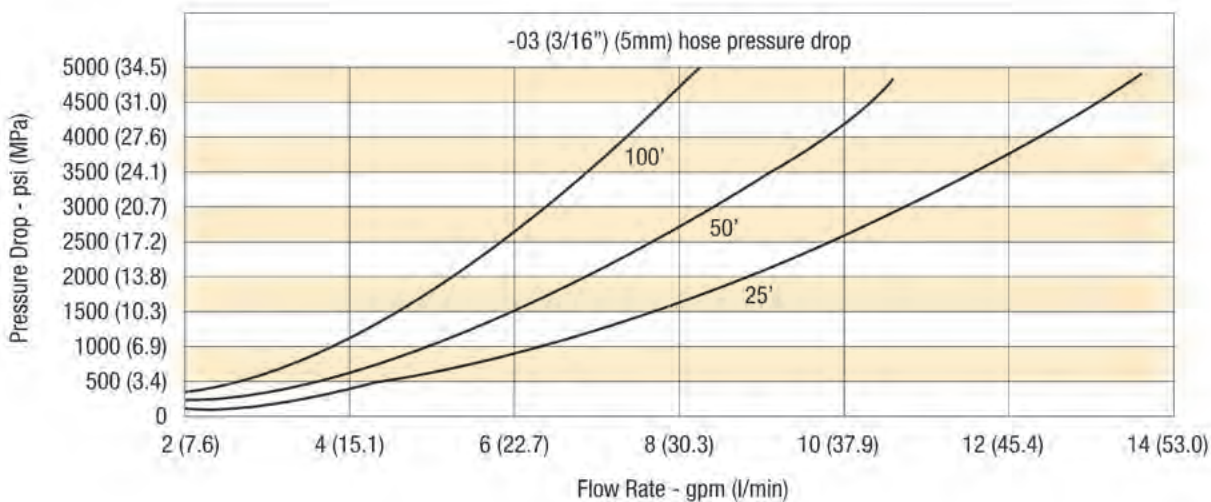


Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.

Pressure Drop vs. Flow

For Size -06 (3/8") (10mm) Hoses

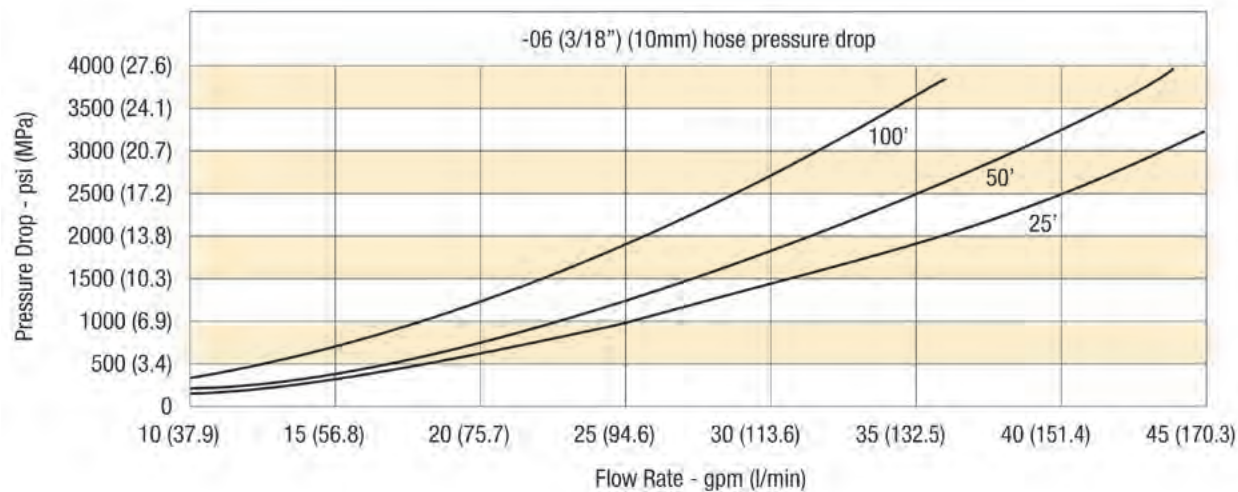

For Size -08 (1/2") (13mm) Hoses

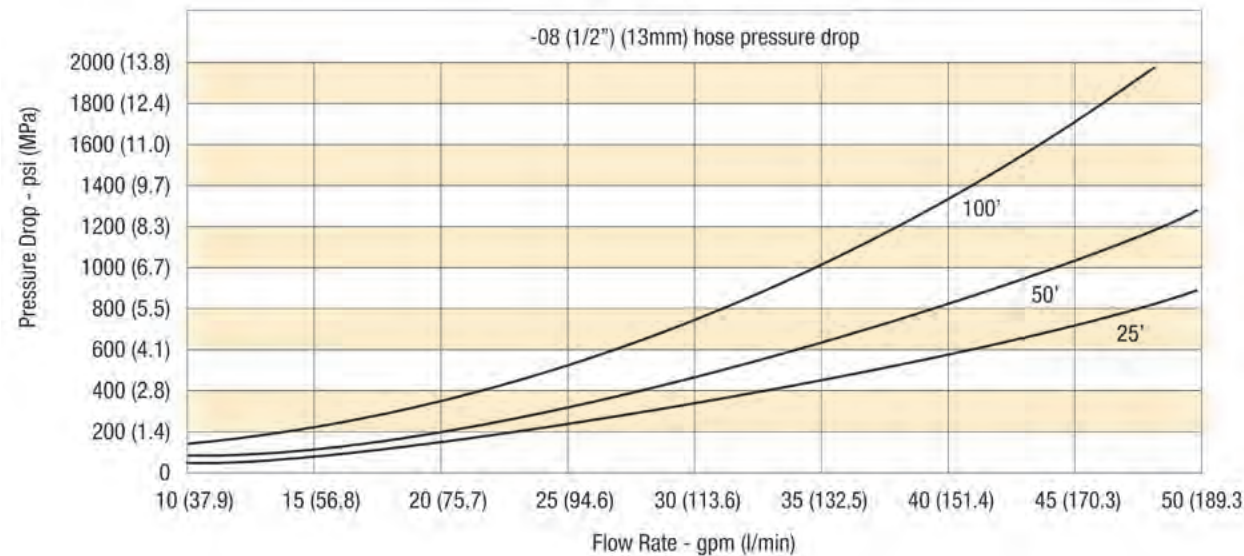

Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.


For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




Pressure Drop vs. Flow

For Size -12 (3/4") (20mm) Hoses

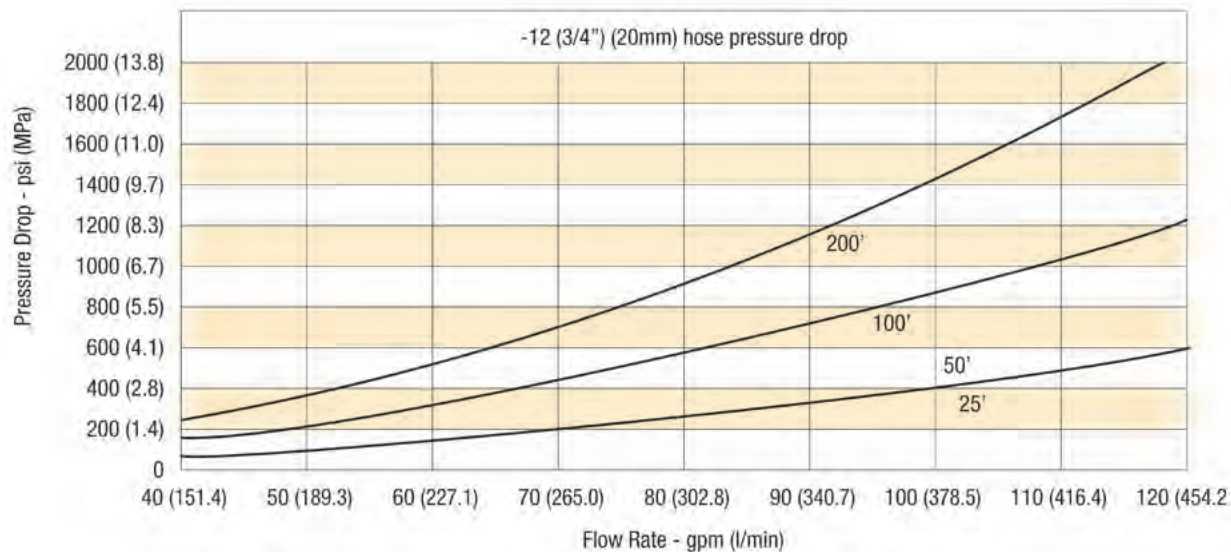

For Size -16 (1") (25mm) Hoses

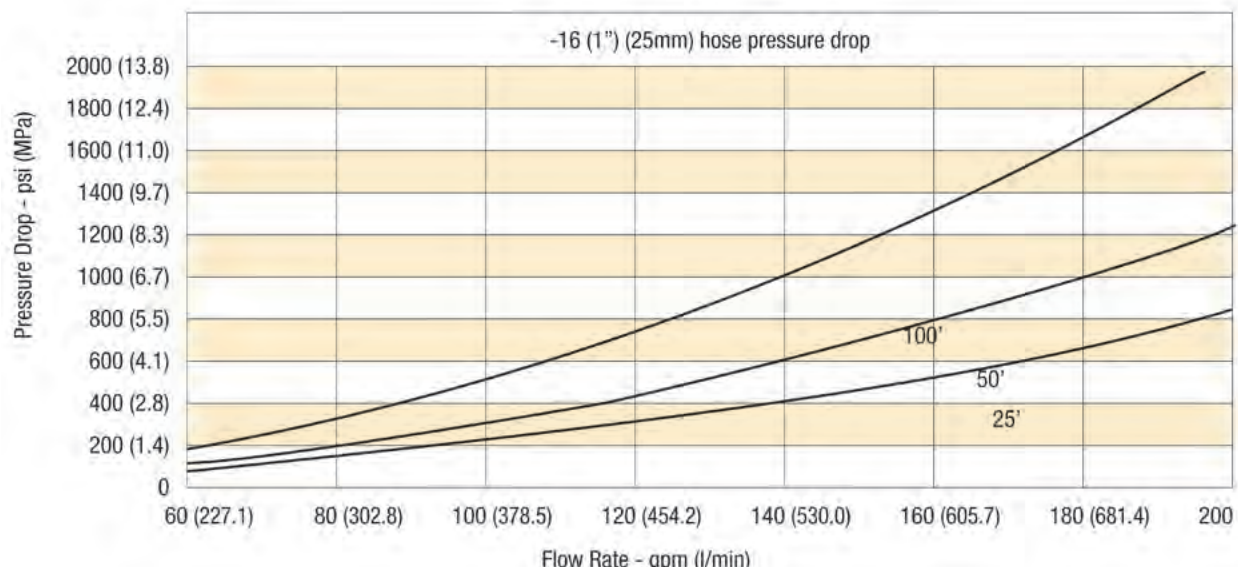

Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.

Pressure Drop Tables for Different Hose Sizes

Remarks

- Figures shown in the table are for 1 meter of hose without fittings.
- Figures derived from calculation, not from testing.
- The recommended max fluid velocity is 7.6 m/s. Hoses have been used at higher fluid velocities. However this may result in cavitation. These flow figures are marked with a grey background.

Fluid: water

Dyn. viscosity: 1002 mPa s

Kin. viscosity: 1002 cSt

Temperature: 20°C

Flowrates: 5 up to 80 l/min. Sizes: 5 mm (-03) up to 13 mm (-08)

Flowrate		Pressure Drop in bar/m				
(l/min)	Gal (US)/min	Nominal I.D.				
		5 mm (-03)	6 mm (-04)	8 mm (-05)	10 mm (-06)	13 mm (-08)
5	1.3	0.40	0.54	0.13	0.05	0.02
10	2.6	1.44	1.96	0.48	0.16	0.07
15	4.0		4.35	1.07	0.36	0.15
20	5.3			1.80	0.61	0.25
25	6.6			2.70	0.91	0.38
30	7.9				1.27	0.52
35	9.2				1.69	0.69
40	10.6					0.90
45	11.9					1.12
50	13.2					1.35
60	15.9					1.91
70	18.5					
80	21.1					

Maximum flowrates for sizes 5 mm (-03) up to 13 mm (-08)

Maximum fluid horizontal velocity is 7.6 m/s (laminar flow)	Maximum Volumetric Flowrate				
	Nominal I.D.				
	5 mm (-03)	6 mm (-04)	8 mm (-05)	10 mm (-06)	13 mm (-08)
Radius r in mm	2.50	3.00	4.00	5.00	6.50
Area in mm ²	19.63	28.27	50.27	78.54	132.73
Max. flowrate m ³ /min	0.01	0.01	0.02	0.04	0.06
Max. flowrate Gallons/min	2.36	3.40	6.05	9.46	15.98
Max. flowrate Liter/min	8.95	12.89	22.91	35.80	60.50
Max. flowrate bbl/min	0.06	0.08	0.14	0.23	0.38

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



F-12

Hose
A

Fittings
B

Adapters & Valves
C


Quick Couplings
D

Accessories
E

General Technical
F

Pressure Drop Tables for Different Hose Sizes

Hydraulic Chart, Sizes 5 mm (-03) to 13 mm (-08)

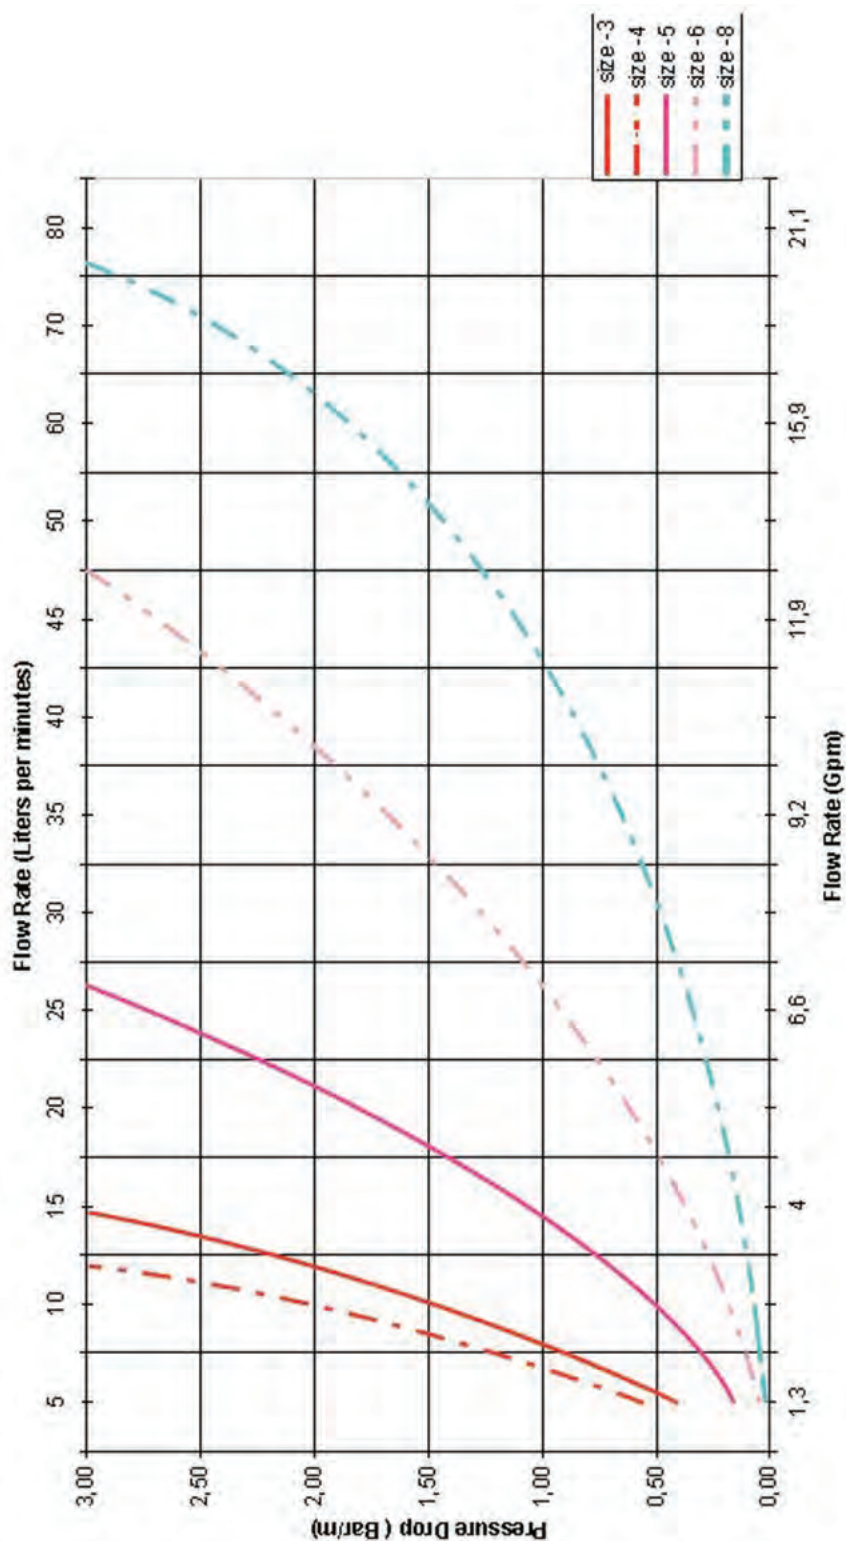

Pressure Drop Tables for Different Hose Sizes

Flowrates: 5 up to 80 l/min. Sizes: 5 mm (-03) up to 13 mm (-08)

Flowrate			Pressure Drop in bar/m					
(l/min)	Gal (US)/min	Oilfield BBL/min	Nominal I.D.					
			20 mm (-12)	25 mm (-16)	32 mm (-20)	38 mm (-24)	50 mm (-32)	76 mm (-48)
50	13	0.31	0.01	0.01	0.00	0.00	0.00	0.00
100	226	0.62	0.16	0.04	0.01	0.01	0.00	0.00
150	40	0.95	0.36	0.09	0.03	0.01	0.00	0.00
200	53	1.26	0.61	0.15	0.05	0.02	0.01	0.00
250	66	1.57	0.91	0.22	0.07	0.03	0.01	0.00
300	79	1.88	1.27	0.31	0.10	0.04	0.01	0.00
400	106	2.52		0.54	0.17	0.07	0.02	0.00
500	132	3.14		0.81	0.26	0.11	0.03	0.00
700	185	4.41			0.49	0.21	0.05	0.01
1000	264	6.29			0.94	0.40	0.10	0.01
1500	396	9.43				0.86	0.21	0.03
2000	528	12.57					0.36	0.05
3000	793	18.88						0.11
3500	925	22.02						0.14
4000	1057	25.17						0.18
4500	1189	28.30						0.22

Maximum flowrates for sizes 5 mm (-03) up to 13 mm (-08)

Maximum fluid horizontal velocity is 7.6 m/s (laminar flow)	Maximum Volumetric Flowrate					
	Nominal I.D.					
	20 mm (-12)	25 mm (-16)	32 mm (-20)	38 mm (-24)	50 mm (-32)	76 mm (-48)
Radius r in mm	10.0	12.5	16.0	19.0	25.0	38.0
Area in mm ²	314.2	490.9	804.2	1134.1	1963.5	4536.5
Max. flowrate m ³ /min	0.3	0.4	0.7	1.0	1.8	4.1
Max. flowrate Gallons/min	74.7	116.6	191.1	269.5	466.6	1078.0
Max. flowrate Liter/min	282.6	441.6	723.5	1020.2	1766.3	4080.7
Max. flowrate bbl/min	1.8	2.8	4.6	6.4	11.1	25.7

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



F-14

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D

Accessories
E

General Technical
F

Pressure Drop Tables for Different Hose Sizes

Hydraulic Chart, Sizes 20 mm (-12) to 76 mm (-48)

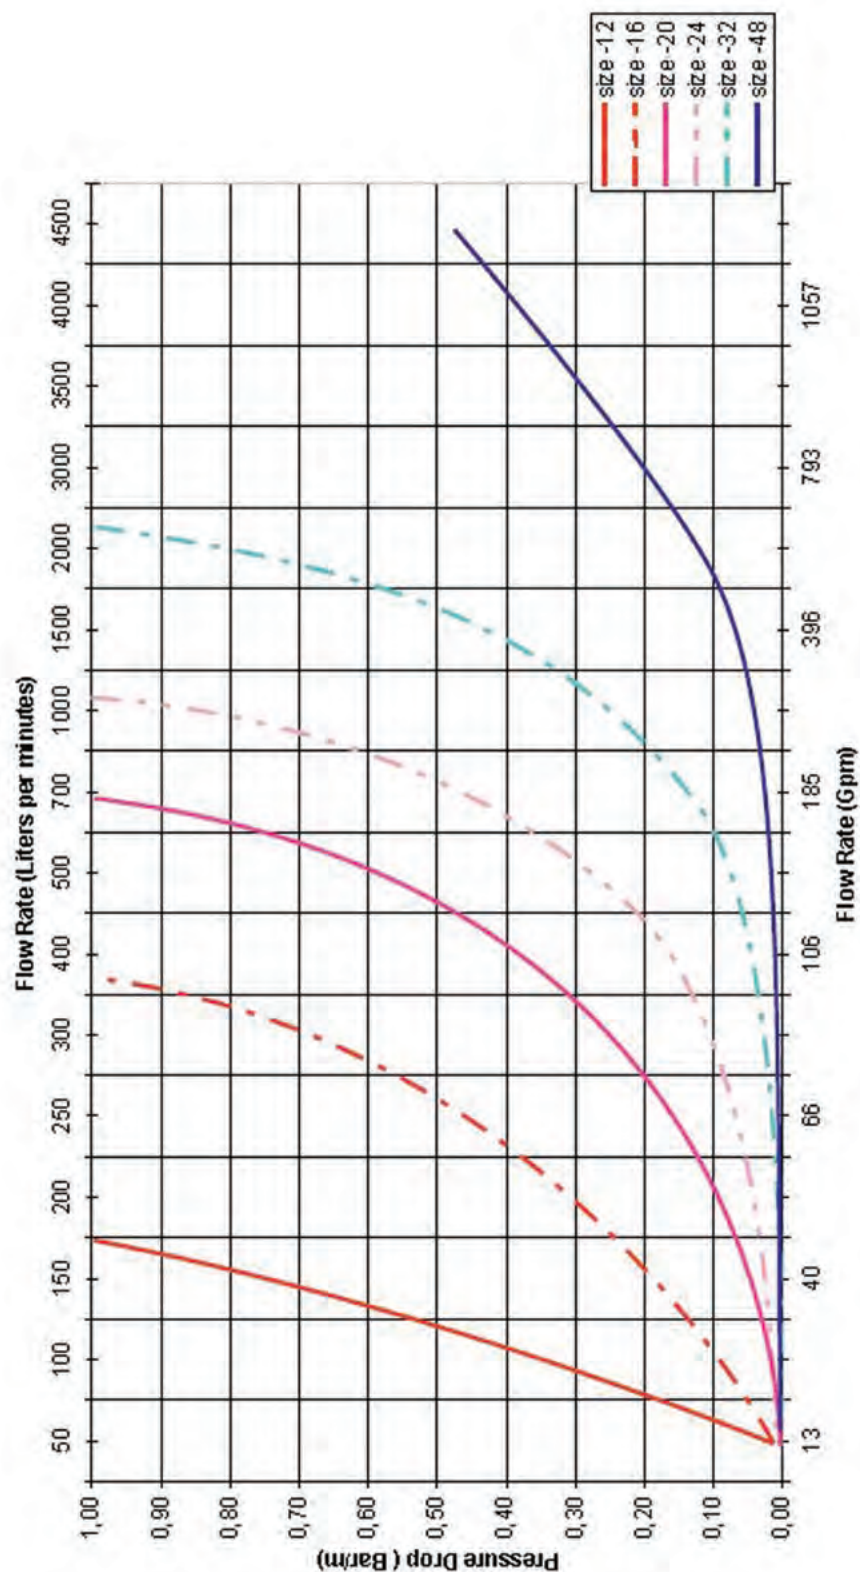

Gas Permeability of Plastics

Permeability coefficient

$$\text{Permeability Coefficient} = \frac{V}{A \times T \times p}$$

Where: V is the volume of gas, in cm³, which diffuses through a 1mm thickness
 A is the area across which the gas diffuses, in m².
 T is the diffusion time, in days.
 p is the pressure difference across the plastic, in bar


Permeability Coefficients per DIN 53380

Material	Gas				
	N ₂	O ₂	CO ₂	H ₂	He
PTFE	50	150	1500	—	3500
PVDF	3	2	10	—	60
PA-6 XE 3289	1	4	10	100*	60*
PA-6 A 28 NZ	0.5	2	5	50*	30*
PA-12 L 2124	—	30	180	210	160
PA-12 P40 TL	—	—	105	—	—
PA-12 L 25W40	8	35	150	1000*	500*
PA-12 L 2140	—	12	71	—	130
PA-11 P 40 TL	—	—	55	130	—
PA-11 POTL	2	20	65	65	—
POM H 2320	5	10	130	35	40
POM 150 SA	2	4	20	—	—
PEE 4055	150	—	3000	—	1400
PEE 5556	120	—	1600	—	900
PEE 7246	—	—	—	—	300

* Calculated value. Diffusion constants based on normal room temperature. Actual behavior may vary considerably because of variations in processing the plastic.

Recommended Tightening Procedures

Connection	Thread Sizes	Tightening Torque	
		ft•lb	N•m
High Pressure			
1/4"	9/16" - 18	25	34
3/8"	3/4" - 16	50	69
9/16"	1-1/8" - 12	75	103
Medium Pressure			
1/4"	7/16" - 20	20	28
3/8"	9/16" - 18	30	41
9/16"	13/16" - 16	85	117
3/4"	3/4" NPSM	90	124
1"	1-3/8" - 12	125	173
Type "M" Swivel			
A9	9/16" - 18	25-30	34-41
A12	3/4" - 16	40-50	55-69
A14	7/8" - 14	50-60	69-83
A16	1" - 12	75-85	103-117
A21	1-5/16" - 12	100-120	138-166
JIC			
1/4"	7/16" - 20	11-12	15-16
3/8"	9/16" - 18	18-21	25-28
1/2"	3/4" - 16	36-39	49-52
3/4"	1-1/16" - 12	80-88	109-119
1"	1-5/16" - 12	100-108	136-146

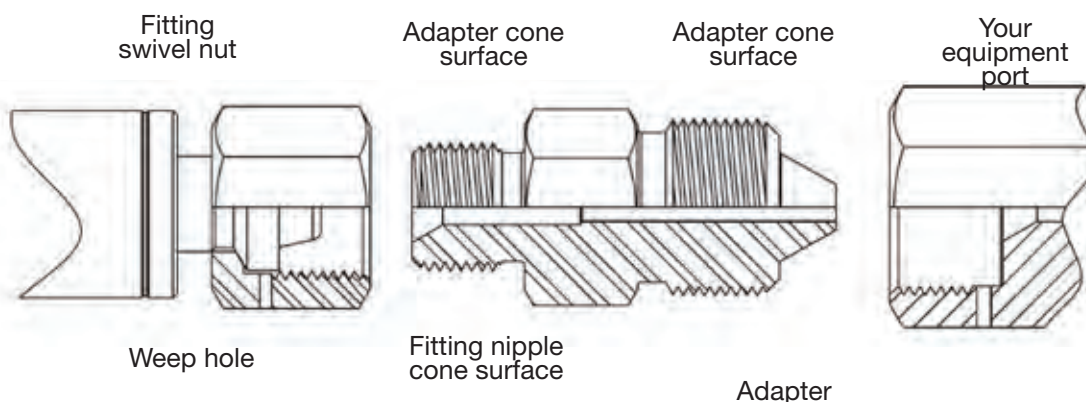

Leakage at swivel nut-to-adapter Joint (Seen by leak at weep hole in swivel nut)

1. Reduce system pressure to zero
2. Unscrew swivel nut and check cone surfaces of adapter and hose insert
3. If hose insert is damaged, return hose to **polyflex** for repair and retest
4. If cone surfaces look good after cleaning, re-tighten swivel nut. Do not exceed 150% of recommended torque.

Leakage at type "M" adapter-to-port

(Seen by leak at weep hole in pressure port, or leak at threads for NPT adapters.)

1. Reduce system pressure to zero
2. Slacken hose swivel nut
3. Tighten adapter into port
4. Re-tighten swivel nut

Never use the swivel nut to tighten the adapter into the port.

Metric Conversion Chart

	English to Metric			Metric to English		
	Convert From	Convert To	Multiply By	Convert From	Convert To	Multiply By
Area	sq. in. (in ²)	sq. mm (mm ²)	645.16	sq. mm (mm ²)	sq. in. (in ²)	0.00155
	sq. in. (in ²)	sq. cm (cm ²)	6.4516			
	sq. ft. (ft ²)	sq. meters (m ²)	0.0929			
Density	pounds/cubic foot (lb/ft ³)	kg/cubic meter (kg/m ³)	16.02	kg/cubic meter (kg/m ³)	pounds/cubic foot (lb/ft ³)	0.0624
Energy	British Thermal Units (Btu) (1J=Ws=0.2388 cal)	joules (J)	1055	joules (J)	British Thermal Units (Btu)	0.000947
Force	pounds - force (lbf) (1N = 0.102 kgf)	newtons (N)	4.448	newtons (N)	pounds - force (lbf)	0.2248
Length	inches (in)	millimeters (mm)	25.4	millimeters (mm)	inches (in)	0.03937
	feet (ft)	meters (m)	0.3048	meters (m)	feet (ft)	3.281
	miles (mi)	kilometers (km)	1.609	kilometers (km)	miles (mi)	0.621
Mass (Weight)	ounces (oz)	grams (g)	28.35	grams (g)	ounces (oz)	0.035
	pounds - mass (lb)	kilograms (kg)	0.4536	kilograms (kg)	pounds - mass (lb)	2.205
	short tons (2000lb) (tn)	metric tons (1000kg)	0.9072	metric tons (1000kg)	short tons (2000lb) (tn)	1.102
Power	horsepower (550 ft. lb/s) (hp)	kilowatts (kW)	0.7457	kilowatts (kW)	horsepower (550 ft. lb/s) (hp)	1.341
Pressure	pounds/square inch (psi)	kilograms (f)/square cm (kg(f)/cm ²)	0.0703	kilograms (f)/square cm (kg(f)/cm ²)	pounds/square inch (psi)	14.22
	pounds/square inch (psi)	kilopascals (kPa)	6.8948	kilopascals (kPa)	pounds/square inch (psi)	0.145
	pounds/square inch (psi)	bars (100 kPa)	0.06895	bars (100 kPa)	pounds/square inch (psi)	14.503
Stress	pounds/square inch (psi) (1N/mm ² = 1MPa)	megapascals (MPa)	0.006895	megapascals (MPa)	pounds/square inch (psi) (1N/mm ² = 1MPa)	145.039
Temperature	degrees Fahrenheit (°F)	degrees Celsius (°C)	5/9 (after subtracting 32)	degrees Celsius (°C)	degrees Fahrenheit (°F)	9/5 (then add 32)
Torque or Bending Moment	pounds-force-foot (lb-ft)	Newtons-meter (Nm)	1.3567	Newtons-meter (Nm)	pounds-force-foot (lb-ft)	0.737
	pounds-force-inch (lb-in)	Newtons-meter (Nm)	0.113	Newtons-meter (Nm)	pounds-force-inch (lb-in)	8.85
Velocity	feet/seconds (ft/s)	meters/second (m/s)	0.3048	meters/second (m/s)	feet/seconds (ft/s)	3.2808
Viscosity	dynamic (centipoise)	Pascal-second (Pas)	0.001	Pascal-second (Pas)	dynamic (centipoise)	1000
	kenematic-foot ² /sec (ft ² /s)	meter ² /sec (m ² /s)	0.0929	meter ² /sec (m ² /s)	kenematic-foot ² /sec (ft ² /s)	10.7643
Volume	cubic inch (in ³)	cubic centimeter (cm ³) (milliliter)	16.3871	cubic centimeter (cm ³) (milliliter)	cubic inch (in ³)	0.061
	quarts (qt)	liters (1000 cm ³)	0.9464	liters (1000 cm ³)	quarts (qt)	1.057
	gallons (gal)	liters	3.7854	liters	gallons (gal)	0.2642

For detailed ordering information, please consult price list or contact Parflex Division.

Glossary

Abrasion

Abrasion occurs in numerous forms; two of the more common are the typical rubbing or chafing, with the second being very high frequency, low amplitude friction. This type of abrasion results from pump pressure pulses otherwise known as pump ripple. It can also be caused by equipment vibration or resonance. Abrasion may occur when two hose lines cross or when a hose line rubs or bears against a fixed point. Abrasion resistance is also a function of temperature and attack of the cover material by aggressive chemicals. Spring guards or other protective sleeving can also ward off premature hose failure resulting from abrasion. Spring guards also distribute bending force often associated with excessive side loading or even kinking at the skirt of the coupling.

Ambient temperature

Exceedingly high or low ambient temperatures will affect the materials from which the hose is constructed and will negatively influence hose life. When at all possible, the hose should be routed in such a manner as to protect it from heat sources. In extreme cold applications, the equipment should be designed with remote relief valves to allow circulation and warming of the oil before hose articulation is attempted. The hose liner (core tube) of choice for extremely high or low temperature is Teflon®. Teflon® is serviceable at temperatures as low as -100°F and as high as +450°F. Consult the specific hose operating parameters for more information.

Bend Radius

The minimum bend radii listed in this catalog are valid at rated working pressures and indicated service temperatures. Service life of a hose may be shortened if the minimum radius is exceeded or if the hose is flexed continuously in use. Burst pressure and working pressure The specified burst pressure for each hose style and dash size are for unaged hoses tested at normal laboratory temperature in accordance with SAE J343 specification for normal service and technically ideal installations. The maximum recommended working pressure is 1/4 of the minimum rated burst pressure, except as otherwise specifically stated in those product specifications. For more severe service, a higher rated working pressure hose may have to be selected.

Hose installation tips

Establish hose size (I. D.) and style based upon flow rate (GPM), pressure drop, and chemical compatibility with fluid medium. Other significant factors to be considered in hose selection and installation are discussed briefly as follows:

Operating temperature

The temperature range for satisfactory service (maximum hose life) depends to a great extent upon the fluid being conveyed. Use of a hose above maximum specified temperature ratings will shorten hose life due, but not limited, to oxidation, chemical degradation and loss of compression within the coupling.

Pressure effects

Pressure surges and system shocks (spikes) are common in hydraulic systems. The normal 4:1 safety factor should reflect these transient pressures. Where these surges and shocks are considered severe or hazardous, the safety factor should be increased.

When hose is under pressure, it may change in length by as much as $\pm 3\%$. Installation should compensate for shortening by providing an appropriate amount of slack and for lengthening by allowing space for this growth to be absorbed.

Routing and clamping

Whenever possible, and maximum efforts should be made to do so, hose should be routed to flex in a single plane. Routing hoses in flexure through compound bends results in torsions. When this is unavoidable, the torsion should be distributed over the maximum hose length possible. Wire reinforced hoses suffer the most rapid and severe loss of service life when applied in torsion. Extremely tight and improperly located clamps focus this torsion over short distances.

Analysis of the hose function is required before the proper clamping techniques can be selected. In some applications, hoses must be contained to stay out of harm's way and at the same time be free to come and go with equipment articulation. Other applications may require restrictive clamping, in which case a protective material should be used around the hose to provide the grasp without deformation of the hose by the clamp. These techniques also apply to the use of the popular method of clamping and clustering hoses with plastic tie straps.

Parker swivel adaptors feature 360° swiveling action that especially suits them for use in applications where hose moves, bends or twists. Swivel adapters connected to hose assemblies relieve twisting, prevent excessive flexing of hose, eliminate need for long radius bends, and cushion intraline shock caused by peak system pressure pulses.

High pressure adapters

It is critical that the adapter material be properly suited to the fluid media. Widely varying conditions frequently necessitate high pressure adapters constructed of materials other than conventional 316 stainless steel. Since many variables affect the corrosion resistance of metallic materials, it is Parker Hannifin's policy not to recommend materials based on corrosion resistance for specific fluid applications. The published recommended working pressure represent the capability of the subject fitting. Nevertheless, in some instances, the hose, hose fitting or other connector assembled to the adapter may dictate the maximum working pressure. The end-user should read and understand the Parker Safety Guide (Bulletin 4400-B.1) and follow its suggested practices and warnings.

General Chemical Resistance Table

Ratings Code

- G — Good to excellent. Little or no swelling, tensile or surface changes. Preferred choice.
- L — Marginal or conditional. Noticeable effects but not necessarily indicating lack of serviceability. Further testing suggested for specific application. Very long-term effects such as stiffening or potential for crazing should be evaluated.
- P — Poor or unsatisfactory. Not recommended without extensive and realistic testing.
- — Indicates that this was not tested.

Materials Code for Hose Core Tubes

- N Polyamide
- M Coextruded tube with Fluoropolymer inner liner

Materials Code for Hose Cover

- N Polyamide
- U/HF Polyurethane

Notes on the Chemical Resistance Table

- (1) The fluid resistance tables are simplified rating tabulations based on immersion tests at 24°C. Higher temperatures tend to reduce ratings. Since final selection depends on pressure, fluid and ambient temperature and other factors not known to Parker Hannifin, no performance guarantee is expressed or implied. The indications do not imply any compliance with standards and regulations and do not refer to possible changes of color, taste or smell. For food and drinking water specially approved materials have to be used. For fluids not listed or for advice on particular applications, please consult Parker Hannifin GmbH, **polyflex** Division in Hüttenfeld, Germany.
- (2) Hose applications for these fluids must take into account legal and insurance regulations. The chemical resistance indicated does not express or imply approval by certain institutions.
- (3) Satisfactory at some concentrations and temperatures, unsatisfactory at others.
- (4) For gas applications, the cover should be pin-pricked and the pressure must not be released quickly. Special safety guard accessories are to be used to prevent damage or personal injury in the event of failure.
- (5) Chemical resistance does not imply low permeation rates. Please consult Parker Hannifin for a recommendation for your specific requirements.
- (6) The indication of chemical resistance does not imply any special food compatibility; it refers only to the chemical resistance of the material.
- (7) Chemical resistance does not imply acceptability for use in airless paintspray applications. These applications require a special, electrically conductive hose. Reference the Safety Guide, 2.1.2

Not all remarks may apply to Oil & Gas products

General Chemical Resistance Table

Chemical	N	U/HF	M
Acetone	G	P	L
Acetylene	—	—	—
Air (4)	G	G	G
Ammonium Chloride	P	G	G
Ammonium Hydroxide	G	P	G
Anhydrous Ammonia	P	P	—
Aniline	P	P	G
Aromatic Hydrocarbons	G	L	—
Asphalt	G	G	L
Benzene	G	L	G
Butane (2) (4)	G	L	—
Calcium Chloride	—	G	G
Carbon Dioxide (4)	G	G	—
Carbon Monoxide (4)	—	G	—
Carbon Tetrachloride	G	P	G
Chlorinated Hydrocarbon Base Fluids	G	L	—
Chlorinated Petroleum Oil	G	L	—
Chlorinated Solvents	—	P	—
Chlorine, Gaseous, Dry	P	P	—
Chromic Acid	—	P	L
Citric Acid Solutions	G	L	G
Crude Petroleum Oil	G	G	—
Cyclohexan (2)	G	G	G
Diesel Fuel (2)	G	G	—
Diester Oils	G	P	—
Ethanol (6)	G	L	—
Ethers	G	P	G
Ethylene Glycol	G	L	G
Ethylene Oxide	G	L	—
Fatty Acids	G	—	G
Formaldehyde	L	P	G
Formic Acid J	P	P	G
Fuel Oil (2)	G	L	G
Gas (Oil) (2)	G	G	—
Gasoline	G	—	G
Glycerine	G	L	G
Glycols (to 135°F)	G	L	G
Grease (petroleum base)	G	G	—

General Chemical Resistance Table

Chemical	N	U/HF	M
Hexane (2)	G	G	G
Hydraulic Fluid (petroleum base)	G	G	L
Hydraulic Fluid (phosphate ester base)	G	L	—
Hydraulic Fluid (water base)	G	G	—
Hydraulic Oil (petroleum base)	G	G	L
Hydrochloric Acid	L	P	G
Hydrofluoric Acid	P	P	G
Hydrolube (hydraulic fluid/water glycol base)	G	L	—
IRUS 902 (hydraulic fluid/water-oil emulsion)	G	G	—
Isooctane (2)	G	G	G
Kerosene (2)	G	L	G
Ketones	G	P	G
Lime (calcium oxide)	G	G	G
Lindol (hydraulic fluid/phosphate esters)	G	P	—
LP-Gas	—	—	—
Lubricating Oils (diester base)	G	P	—
Lubricating Oils (petroleum base)	G	G	G
Methane	—	—	—
Methanol	G	P	—
Methyl Alcohol (6)	G	P	G
Methyl Ethyl Ketone (MEK)	G	P	G
Methyl Ethyl Ketone Peroxide (MEKP)	L	P	—
Methyl Isobutyl Ketone (MIBK)	G	P	G
Methylen Chloride	L	P	G
Mineral Oil	G	G	G
Mineral Spirits	—	L	—
Motor Oils	G	G	G
Naphta	G	P	G
Natural Gas (4)	—	—	—
Nitric Acid	P	P	L
Nitrobenzene	G	P	G
Nitrogen, Gaseous (4) (5)	G	G	G
Nitrous Oxide	L	—	—
Oil (SAE)	G	G	—
Oxygen, Gaseous (4) (5) (6)	G	G	G
Pentane (2)	G	L	G
Perchloric Acid	P	P	L
Petroleum Ether	—	—	—

For detailed ordering information, please consult price list or contact Parflex Division.

General Chemical Resistance Table

Chemical	N	U/HF	M
Petroleum Oils	G	G	—
Phenols	P	P	—
Phosphate Esters (above 135°F)	G	P	—
Phosphate Esters (to 135°F)	G	P	—
Propane (4) (5)	—	—	—
Propylen Glycol	—	G	G
Salt Water	—	—	G
Silicone Greases	G	G	—
Silicone Oils	G	G	—
Sodium Borate	G	G	G
Sodium Carbonate	—	—	—
Sodium Chloride Solutions	G	G	G
Sodium Hydroxide, 50%	P	P	G
Sodium Hypochloride	P	P	G
Steam	P	P	G
Straight Synthetic Oils (phosphate esters)	G	P	—
Sulphur Dioxide	L	L	G
Sulphur Hexafluoride Gas (4) (5)	G	G	—
Sulphuric Acid	P	P	—
Toluol, Toluene	G	L	G
Trichlorethylene	L	P	G
Ucon (hydraulic fluid/water glycol base)	G	L	—
Water (above 60°C) (6)	G	P	L
Water (to 60°C) (6)	G	G	G
Water Glycols (above 60°C)	L	P	—
Water Glycols (to 60°C)	G	L	—
Water in oil Emulsions (above 60°C)	L	P	—
Water in oil Emulsions (to 60°C)	G	L	—
Xylene	G	P	G
Zinc Chloride	G	G	G

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

PARKER ENGINEERING MANUAL Technical Matrix for Parker *polyflex* Offshore Hoses Parker Publication No. PFDE-ES29 Revised: March 2013

Scope

This engineering standard contains the main information which is important for the selection of hose for offshore applications.

Guidelines for handling and storage of hose, see PFDE-ES28 on pg F-29.

Notes

Detailed information is available in the appropriate hose datasheets. They always have precedence.

Most of the hoses have been fully qualified according to ISO 13628-5 for the working pressures stated, some at even higher pressures and temperatures. Contact Parker for detailed information.

Working pressures stated below are based on safety factor 4:1.

Maximum lengths values are approximate ones. Most of them have been proven during the manufacturing process.

Collapse pressures are typical values. Some of them have been measured on straight hoses, some at the hose minimum bend radius. The values measured at the minimum bend radius as per ISO 13628-5 are highlighted in all tables in italic underlined.

All values are only valid for hose assemblies, assembled with appropriate Parker fittings acc. to Parker assembly instructions assembled by Parker trained operators.

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

1 Hoses with methanol washed Nylon 11 core tube, multiple layers of steel wire and a Nylon outer jacket

Working temperature for these hoses is (-40°F to +212°F) (-40°C to +100°C).

For chemical resistances of core tubes, see PFDE-ES28 on pg F-29.

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar)
			psi	bar	psi	bar			
2240N-04V91	6.4 mm 1/4" Size -04	11.6	6250	430	25000	1725	3500	0.17	<u>100</u>
2340N-04V91		12.5	10000	690	40000	2760	3500	0.23	<u>150</u>
2380N-04V91		13.4	10000	690	40000	2760	3200	0.27	<u>220</u>
2440N-04V91		13.1	12500	875	50000	3500	3200	0.31	<u>260</u>
2448N-04V91		13.7	15000	1035	60000	4140	3000	0.38	<u>445</u>
2370N-06V91	9.5 mm 3/8" Size -06	16.5	6250	430	25000	1725	2500	0.33	<u>90</u>
2370N-06V91-10K*		16.5	10000	690	25000	1725	2500	0.33	<u>90</u>
2390N-06V91		18.1	6450	445	25800	1780	3200	0.41	150
2380N-06V91		17.9	7500	517	30000	2070	2500	0.44	300
2440N-06V91		19.5	12500	875	50000	3500	3200	0.73	<u>320</u>
2390N-08V91	12.7 mm 1/2" Size -08	21.2	6000	415	24000	1660	3500	0.57	<u>85</u>
2380N-08V91		22.9	7500	517	30000	2070	3000	0.68	230
2440N-08V91		22.7	11745	810	46980	3240	3000	0.94	<u>190</u>
2390N-12V91	19.1 mm 3/4" Size -12	29	5000	345	20000	1380	3200	0.9	75
2440N-12V91*		30.2	10000	690	36250	2500	2000	1.47	<u>80</u>
2640N-12V91		33.2	12500	875	50000	3500	1800	2.16	<u>120</u>
2390N-16V91	25.4 mm 1" Size -16	35	4060	280	16240	1120	3200	1.17	<u>39</u>
2440N-16V91		37.2	8120	560	32625	2250	2000	1.9	<u>60</u>
2440N-16V91-10K*		37.2	10000	690	32625	2250	2000	1.9	<u>60</u>

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

1.1 Large bore hoses with additional TPU outer jacket, “ColorGard™”

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar)
			psi	bar	psi	bar			
2640N-24V80*	38.1 mm	70.5	10000	690	33350	2300	600	7.2	<u>65</u>
2640N-24V80-KOP*	1-1/2"	70.5	15000	1035	33750	2330	600	7.2	<u>65</u>
2640N-24V80-KOP2*	Size -24	66	15000	1035	33750	2330	600	6.5	<u>65</u>
2448N-32V80 PHalcon 2	50.8 mm	80	5000	345	20000	1380	1000	8.8	<u>49</u>
2580N-32V80* Black Eagle 2	2" Size -32	84	10000	690	25000	1725	1000	9.4	<u>57</u>
2240N-48V80* Black Eagle	76.2 mm 3" Size -48	114	5000	345	12500	862	350	11.5	20
2440N-48V80* Black Eagle		122	10000	690	25000	1725	300	18.7	<u>40</u>
2640N-48V80* Black Eagle		130	15000	1035	33750	2330	250	27.5	80

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

2 ChemJec hoses with fluoropolymer core tube, multiple layers of steel wire and a Nylon outer jacket

Working temperature for these hoses is (-40°F to +212°F) (-40°C to +100°C).

These hoses have an excellent chemical resistance against most of the aggressive chemicals.

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar) (see Notes on pg F-24)
			psi	bar	psi	bar			
2240M-04V38	6.4 mm 1/4" Size -04	11.6	6250	430	25000	1725	3500	0,17	<u>105</u>
2340M-04V38		12.5	10000	690	40000	2760	3500	0,23	<u>205</u>
2380M-04V38		13.4	10000	690	40000	2760	3200	0,27	<u>400</u>
2440M-04V38		13.1	12500	875	50000	3500	3200	0,31	<u>295</u>
2448M-04V38		13.7	15000	1035	60000	4140	3000	0,38	<u>378</u>
2380M-05V38	7.9 mm 5/16" Size -05	15.8	8700	600	34800	2400	2000	0,35	<u>167</u>
2440M-05V38		16.15	10000	690	40000	2760	2500	0,49	<u>260</u>
2448M-05V38		16.2	15000	1035	60000	4140	2500	0,52	<u>385</u>
2370M-06V38	9.5 mm 3/8" Size -06	16.5	6250	430	25000	1725	2500	0,33	<u>150</u>
2440M-06V38		19.5	10000	690	50000	3500	3200	0,73	<u>370</u>
2448M-06V38		20.1	15000	1035	60000	4140	3000	0,83	<u>390</u>
2440M-08V38	12.7 mm 1/2" Size -08	22.7	10000	690	40000	2760	3000	0,94	<u>252</u>
2640M-08V38		24.7	15000	1035	60000	4140	2800	1,34	<u>300</u>
2390M-12V38	19.1 mm 3/4" Size -12	29.0	5000	345	20000	1380	3200	0,9	<u>75</u>
2440M-12V38*		30.2	10000	690	36250	2500	2000	1,47	<u>110</u>
2390M-16V38	25.4 mm 1" Size -16	35	4000	280	16000	1120	3200	1,19	<u>35</u>
2440M-16V38-5K		37.2	5000	345	32625	2250	2000	2,05	<u>65</u>

* Working pressures for these hoses are based on safety factors lower than 4:1.

2.1 Large bore hoses with additional TPU outer jacket, "ColorGard™"

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar) (see Notes on pg F-24)
			psi	bar	psi	bar			
2640M-24V88*	38.1 mm 1-1/2" Size -24	70.5	10000	690	33350	2300	600	7.2	65
2448M-32V88 Phalcon 5000 2	50.8 mm 2" Size -32	80.5	5000	345	20000	1380	600	8.5	49
2580M-32V80* Golden Eagle 2		84.5	10000	690	25000	1725	600	9.4	65

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

3 SeaWolf® high collapse resistance aramid reinforced hoses with nylon core tube and TPU outer jacket

Working temperature for these hoses is (-40°F to +140°F) (-40°C to +60°C).

For chemical resistances of core tube, see PFDE-ES28 on pg F-29.

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar) (see Notes on pg F-24)
			psi	bar	psi	bar			
57CR-8-BLU	12.7 mm 1/2" Size -08	30	5000	34.5	20000	1380	200	0.94	230
57CR-16-BLU	25.4 mm 1" Size -16	51	5000	34.5	20000	1380	200	2.17	210

4 Hoses with methanol washed Nylon 11 core tube, multiple aramid yarn braids and a TPU outer jacket

Working temperature for these hoses is (-40°F to +130°F) (-40°C to +55°C).

For chemical resistances of core tubes, see PFDE-ES28.

Hose Part No.	Nominal I.D.	Nominal O.D. (mm)	Working Pressure		Burst Pressure		Max. Manufact. Length (m)	Weight in Air (kg/m)	Collapse Pressure (bar) (see Notes on pg F-24)
			psi	bar	psi	bar			
2022N-04V91-5K	6.4 mm 1/4" Size -04	12.7	5000	34.5	20000	1380	2000	0.12	<u>50</u>
2022N-04V91-10K-13MM		12.9	10000	69.0	40000	2760	3000	0.12	<u>75</u>
2022N-04V91-10K		13.8	10000	69.0	40000	2760	2500	0.14	<u>60</u>
2022N-06V91-5K	9.5 mm 3/8" Size -06	16.1	5000	34.5	20000	1380	2000	0.15	<u>14</u>
2022N-06V91-10K		19	10000	69.0	40000	2760	2000	0.19	<u>40</u>
2022N-08V91-5K	12.7 mm 1/2" Size -08	20.8	5000	34.5	20000	1380	2000	0.17	<u><10</u>
2022N-08V91-10K		23.2	10000	69.0	40000	2760	1500	0.34	<u>19</u>

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

PARKER ENGINEERING MANUAL

Instructions for Handling, Maintenance, Inspection and Repair of **polyflex** 1"-3" Large Bore Hoses and Assemblies Used in Oil & Gas Applications

Parker Publication No. PFDE-ES28

Revised: October 2014

1 Scope

This engineering standard is focused mainly on larger bore (1"-3"), long length Parker Polyflex multispiral wire-reinforced hoses used in well service operations. It is also relevant for shorter length hose assembly applications such as chemical injection, stimulation, cementing, flexible and testing lines. It provides information on recommended practices for handling, maintenance, inspection, and repair of hose assemblies.

Deployed as single line hoses or used in bundles, these hoses are available in sizes from 3/16" to 3" inside diameter with working pressures up to 1035 bar / 15,000 psi and continuous lengths greater than 3000 m, depending on size.

Hose can be self-supporting, clamped, supported by a guide wire or strengthened with an additional tensile reinforcement.

Parker Polyflex have certified several specialized testing facilities and their personnel to assemble, inspect, test and repair hose assemblies. Hose management is an essential part of the service they provide.

SAE J1273, ISO 17165-2, API RP 17B and ISO 13628 are excellent documents providing general guidelines for selection, routing, fabrication, installation, replacement, maintenance, and storage of hose and hose assemblies. Together with Parker Polyflex field experience, they provide the basis for the recommendations included in this engineering standard.

2 Hose Features

Parker Polyflex Oil & Gas multispiral wire-reinforced hoses have been used for over 30 years in both onshore and offshore applications. They are proven to be tough, easy to handle, lightweight (compared with alternatives), and offer excellent chemical resistance, integral external collapse, ozone and microbiological resistance.

In extreme, abrasive applications, Polyflex offers an additional extra thick ColorGard™ sheath incorporating a dual color "early warning" safety feature.

2.1 Design Life

Parker Polyflex large bore hoses are designed for prolonged service life. The prerequisite for this design life is that the hoses are used within the operating limits stated in the hose specification sheets. These limits include, but are not limited to, working pressure, number of pressure cycles, temperature range and bending radius.

In order to ensure a long service life, Parker Polyflex incorporates a combination of raw material suppliers testing and data, fatigue testing, and accelerated and specialized testing into the design of the hoses.

Obviously, due to many other factors affecting the service life, it is not possible to predict or guarantee service life of each individual hose assembly.

These factors may include, but are not limited to, mechanical loads (bending, torsion, tensile loads), frequent changes of temperature within the specified range, improper handling and storage, chemical attack, abrasive fluids, hose damage etc.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

3 Storage

Hoses and hose assemblies should be stored, wherever possible, empty and protected from the elements in a stress free condition either straight, in a coil, or on a drum. The inside diameter of the coil or drum should not be less than two times the minimum bend radius. If a hose assembly has been used with chemicals, it shall be flushed with water before putting it to storage (see also 5.4).

Example: hose with minimum bend radius 800 mm; minimum size of drum core/belly should be $2 \times 800 \text{ mm} = 1.6 \text{ m}$.

The fittings should be capped to prevent ingress of dirt or other contamination and any exposed threads protected from damage.

Storage of hoses and hose assemblies should take into account potential exposure to corrosive liquids, rodents, insects, UV light and high temperatures. Storage temperatures should be in the range of hose operating temperatures.

4 Handling

4.1 Personnel

Only trained personnel shall handle and connect hose assemblies.

Incorrect handling will seriously reduce the lifetime of the hose and could cause dramatic failure. The use of wire rope or chains directly against the outer cover should be avoided, and the routing of the assembly should ensure the hose is never bent below its minimum bend radius or twisted. Special attention should be paid to the area at the back of the fitting.

4.2 Spooling and Reeling

When reeling long length hose onto a drum it is essential to minimize the tension on the hose. Proof testing of a “stretched” hose while on the drum can cause premature failure of the hose or damage to the drum.

When operating from a vessel it is recommended that the hose is pressurized during the subsea deployment and retrieving operation. This

recommendation is based on the fact that during these operations the hose is always subjected to tensile force, at least due to its own weight. Tensile forces will result in hose elongation and possible deformation.

This is significantly reduced by pressurizing the hose, especially important if it is planned to proof test the hose assembly while coiled on a drum or winch. Deployment and retrieving pressures up to 200 bar had been found to be sufficient but this depends on the hose type and local safety regulations. For recommendations of pressure / load values see Appendix 2.

When re-spooling a long length assembly, the pay-off and take-up drums should be inline and a minimum of 10m apart. Depending on how the hose was delivered or re-spoiled, the hose shall be spooled from either the top of the pay-off drum onto the top of the take-up drum or from bottom to bottom. (See Fig. 1 and Fig. 2 on next page.) These recommendations minimize the possibility of inducing twist into the hose.

When re-spooling a new hose that has a polyurethane cover, it is recommended to lubricate the hose cover with soapy water or other suitable lubricant so the hose will traverse more easily and position itself correctly onto the take-up drum/winch. See Fig. 1 (next page).

It is also recommended, when deploying the hose through a moon pool or over the side of a vessel, to align the hose routing in the same manner. See Fig. 2 (next page).

Note:

When first supplied, the layline printed on the hose is normally straight and visible. Twisting of the layline is an early indication of poor alignment or high tensile loading.

Hose
A

Fittings
B

Adapters &
Valves
C


Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

Top to top spooling

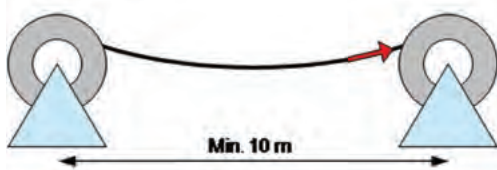

Bottom to bottom spooling

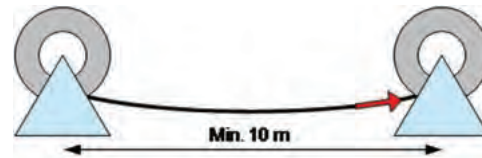


Fig. 1 Hose re-spooling

Top to top deployment - *correct*



Bottom to top deployment - *incorrect*



Fig. 2 Hose deployment

5 Possible causes of premature failure, and suggested preventative measures

5.1 Bending the hose below the minimum bend radius

This is most likely to occur if the end fitting is not supported during lifting, a support sling wrongly positioned, or the hose being pulled around a tight corner. It is important that hose should not be bent close to the end fittings. The straight section should be at least two times the outside diameter of the hose before it starts to bend.

Bend restrictors, lifting clamps and containment grips are useful accessories that help to reduce this type of handling problem.

5.2 Damage of the hose cover

Polyflex ColorGard™ extra thick, dual colour cover significantly reduces the risk of exposing the reinforcing wires. If the outer black cover has been abraded to the point that the “early warning” red inner cover can be seen, but the wire reinforcement has not been exposed, the assembly is still fit for use but shall be scheduled for inspection. Alternatively, a repair according to section 8.1.1 may be considered.

If the hose cover is damaged to the extent that

the reinforcing wires are exposed, localized corrosion of the wires could occur causing a progressive reduction in burst pressure, and ultimately failure.

If used subsea, a damaged cover will allow water to ingress into the carcass of the hose and could cause the corrosion of the wire reinforcement and/or collapse of the core tube.

It is strongly recommended to immediately remove from service any hose assembly with exposed wires. See also section 8.1.2 for details. A Parker Polyflex specialized testing facility should be contacted and the procedure described in section 7.1 shall be followed.

5.3 Kinked, crushed or twisted hose

If a visible distortion of the hose occurred (kinked, crushed, twisted) it will have an impact on the function and lifetime of the hose. Reduction of burst pressure and external collapse pressure could result in a sudden failure of the hose assembly. This distortion can be caused by a high tensile load or other factors.

Maintaining pressure in the hose will significantly reduce the risk of such distortion occurring.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

5.4 Chemical attack or aging of the core tube

The use of chemicals at differing concentrations and/or temperatures can have a major effect on the life of a hose assembly and may cause dramatic hose failure. It is important to reference the chemical compatibility chart in the appendix of this document and keep the temperatures and concentrations within the specified limits.

Note:

It is critical that the hose is thoroughly flushed with water after each use.

If the hose is not flushed, the concentration of the fluid that is left in the assembly can increase and cause localised failure of the core tube.

5.5 Damage or corrosion of the end fitting

Incorrect handling or insufficient flushing after use could result in damage or corrosion of the end fitting. This will make connection difficult, probably cause leakage, and could result in sudden failure of the connection.

5.6 Flow rates

Depending on the abrasive properties of the fluid, high flow rates can result in erosion in the core tube or in the bore of the end fitting.

The maximum recommended flow rate is 15 m/sec, although much higher rates have been used short term with non abrasive fluids.

Note:

The condition of the core tube and end fittings are checked as part of the full inspection.

6 Routine in-field pre-job and post-job maintenance, inspection and testing

6.1 Routine in-field pre-job maintenance, inspection and testing

The operator shall visually inspect the hose assembly during every deployment. If any of the following conditions are found the hose shall be removed from service and scheduled for inspection.

- Damage to the outer cover which exposes the reinforcing wires.
- Kinked, crushed, or twisted hose.
- Reduction in the outside diameter of the hose.
- Blistered, soft, degraded, or loose outer cover.
- Cracked, damaged, or badly corroded fittings.

If in doubt, contact the original supplier or a Parker Polyflex specialized testing facility for advice.

Regular in-field pressure testing, (normally required after attaching connectors prior to hose deployment), should be restricted to a test pressure of 1,1× actual operating pressure, or the maximum stated working pressure of the hose assembly.

Prior to all pressure testing it must be ensured that all air is purged out of the hose. Failure to do so may result in core tube failure. To control that all air is removed it is sufficient to observe that the fluid flow leaving the hose is steady and constant for minimum of 5 minutes without any air bubbles or pulsations.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

6.2 Routine in-field post-job maintenance, inspection and testing

On completion of each operation both inside and outside hose surfaces should be flushed/cleaned with sufficient clean water to ensure that all chemicals or residues are fully removed from the hose assembly.

The operator shall visually inspect the hose assembly during every recovery. If any of the following conditions are found the assembly shall be removed from service and scheduled for inspection.

- Damage to the outer cover which exposes the reinforcing wires.
- Kinked, crushed, or twisted hose.
- Reduction in the outside diameter of the hose.
- Blistered, soft, degraded, or loose outer cover.
- Cracked, damaged, or badly corroded fittings.

If in doubt, contact the original supplier or a Parker Polyflex specialized testing facility for advice.

6.3 Recertification of hose assemblies

Parker Polyflex recommend that all hose assemblies shall be returned to the original supplier or a Parker Polyflex specialized testing facility at least once a year for full inspection/recertification.

The supplier will issue a report detailing the condition of the assembly, and recommend recertification, repair, or replacement.

7 Procedure for full inspection

In addition to the standard marking (WP, month and year of production, hose assembly manufacturer and serial number) all hose assemblies will be marked with the recertification date (RECERT. MM/YYYY).

It is the responsibility of the purchaser to track the location of the hose assembly and the responsibility of the supplier to inform the purchaser a month before the hose assembly is due for full inspection/recertification.

Parker Polyflex have trained and certified specialized facilities and their personnel to assemble, inspect, test, repair and recertify hose assemblies.

Hose management is an essential part of the service they provide.

The history of each assembly must be logged showing the results of previous inspections and any repairs.

7.1 Customer pre-dispatch procedure before returning a hose assembly for inspection/repair

- The object is to make sure the hose assembly can be safely handled and the condition of the assembly will justify the transportation and inspection costs.
- The chosen inspection facility should be contacted if doubtful about any of the points below.
- Check and record assembly serial number (send information to test facility).
- Assembly must be free of chemical residues inside and outside (could result in refusal to handle returned assembly).
- Report on any findings out of section 6.1
- Method of transport, size and weight, (long length hose assemblies on drums or reels may require special handling equipment such as drums and re-spooling machinery).
- Customer will receive a budget price for inspection based on the information given by the end user.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

7.2 Full inspection of the returned hose assembly includes the following:

- Safety inspection, condition of assembly as received.
 - o Check for chemical residue inside and outside (may require flushing or cleaning).
 - o Assembly serial number (check assembly history including previous repairs).
- External inspection
- Internal inspection
- Inspection report

7.2.1 External inspection

- Damage to the outer cover (abrasion, incorrect routing)
- Exposed reinforcing wires. (damaged outer cover)
- Kinked, crushed, or twisted hose. (high tensile loading, incorrect routing)
- Reduction in the outside diameter of the hose (high tensile loading with no pressure)
- Blistered, soft, degraded, or loose outer cover. (chemical attack, leaking fitting, permeation or high temperature)
- Cracked, damaged, or badly corroded fittings (chemical attack, poor handling, old hose assembly)
- Damage or wear on fitting threads (poor handling, old hose assembly)
- Condition of containment grips / clamps. (abrasion, frayed wires, distortion)

7.2.2 Internal inspection

Internal inspection shall be done with an endoscope.

- Check for damage to bore of fittings, cracks, severe abrasion, corrosion.
- Check condition of core tube at the back of fittings (critical area).
- Scope maximum length of the core tube possible. Recommended minimum is 10 m both sides.

- Hose assemblies shorter than 20 m should be scoped on the complete length.
- Look for uneven surface (sign of wire fatigue, abrasion, chemical attack).

7.2.3 Inspection report

The testing facility will advise on the overall condition of the hose and end connections.

Customer will receive detailed report of the findings, including recommended actions:

- repair
- recertification
- scrapping

8 Procedure for repair and recertification

8.1 Repair

It is recommended, that all repairs are done by certified specialized testing facilities. Some repairs (see examples below) could be done in field. Be sure to maintain safety requirements.

8.1.1 Twisted hose, hose with reduced O.D., flattened hose

A hose with signs of twisting or deformation will need to be unreeled, as straight as possible, from the winch/drum in a safe environment and pressurized to working pressure for at least 1 hour and then pressure released. The hose shall be re-inspected to see if the hose has returned to its “untwisted, undistorted” original shape. If so, the hose should be again pressurized before rewinding back onto the winch/drum. Any sections of hose still misshapen should be cut out of the assembly.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

8.1.2 Hose with cover damage

- No reinforcement wires exposed.

Temporary solution, the damaged area can be cleaned and protected by wrapping with a strong adhesive “duct / riggers” tape. If abraded to the point where the red ColorGard is visible, the damaged area should be thoroughly cleaned with mild solvent, a thin plastic sheet wrapped around the hose to form a mould. A two pack polyurethane mixture can then be poured into the mould and allowed to set. Remove mould after the polyurethane is set.

- Reinforcement wires exposed.

It is strongly recommended to remove the hose assembly from service immediately. Any ingress of water into hose carcass will initiate corrosion of the reinforcement wire. It is difficult to estimate the rate of corrosion. At best, the hose could function for months, at worst, possibly less than one week. It is also possible that the core tube could have collapsed if the external pressure acting within the carcass is greater than internal pressure within the hose.

In any case, the lifetime of the hose assembly will be significantly reduced, and the hose assembly shall be immediately scheduled for inspection at certified specialized testing facility.

Decision to further use a hose assembly with exposed wire shall be based on a proof pressure test for 1,1× maximum working pressure of the hose assembly. This test shall be conducted prior to every further job.

Repair of such a hose assembly is possible, but it will include cutting out the section of the hose, where the wires have been subjected to water. Obviously, this will require new fittings to be crimped and hose assembly to be proof pressure tested. Procedure for proof pressure testing in this case is specified in the assembly instructions for the appropriate hose type.

After successfully passing pressure test, hose assembly shall be permanently marked with the new recertification date (see section 7).

The testing facility will recommend if the condition of the hose warrants the cost of assembling new fittings, joining the lengths together and proof testing.

8.2 Recertification

Recertification shall include full inspection acc. to section 7.2 and a hydrostatic pressure test.

Unless otherwise agreed between customer and test facility, test conditions are:

Test pressure = $1.5 \times$ maximum working pressure of hose assembly. Allow for at least 30 minutes stabilization time before starting recording pressure decay.

Pressure hold time = 1 hour

Pressure decrease of maximum 5% is allowed.

After successfully passing pressure test, hose assembly shall be permanently marked with the new recertification date (see section 7).

The maximum number of pressurizations to $1.5 \times$ maximum working pressure is limited to 20.

Note:

The 20×1.5 WP pressurizations is likely to be a combination of annual inspections, re-ending damaged fittings, or cutting off damaged hose. Example 1 – undamaged hose and fittings tested once a year give an estimated lifetime of 20 years. Example 2 - after 5 years, – fitting re-ended 4 times, hose damaged 3 times, $5 \times$ annual pressurizations at $1.5 \times$ WP (tip, re-ending of both fittings would only require one pressure test) result in the total number of pressurizations at $1.5 \times$ WP of 12.

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

Appendix 1: Chemical Resistance Chart

The below chart contains chemical resistance information for Polyamide 11 (Nylon 11) and Fluoropolymer.

These are the most common core tube materials used for Parker Polyflex oil & gas hoses. Please refer to the hose datasheets for more detailed information.

Rating Codes

E	Excellent	Good to excellent. Little or no swelling, tensile or surface change. Preferred choice.
A	Good	Good to excellent. Little or no swelling, tensile or surface change. Limitations with temperature and type of fluid.
B	Limited	Marginal or conditional. Noticeable effects but not necessary indicating lack of serviceability. Further testing is suggested for specific application. Very long-term effects.
X	Unsatisfactory	Poor or unsatisfactory. Not recommended without extensive and realistic testing.
-		Indicates that this was not tested.
*	Swelling	Increase of volume of material, due to absorption of a solvent.

Material Code for Hose Core Tube

N Polyamide

M Coextruded core tube with Fluoropolymer inner liner

Notes on Chemical Resistance Table

The chemical resistance table is a simplified rating tabulation based on immersion tests. Higher temperatures tend to reduce ratings. Since final selection depends on pressure, fluid, ambient temperature and many other factors not known to Parker Hannifin, no performance guarantee is expressed or implied.

The indications do not imply any compliance with standards and regulations and do not refer to possible changes of colour, taste or smell.

Some hose applications must take into account legal and insurance regulations. The chemical resistance indicated does not express or imply approval by certain institutions.

Chemical resistance does not imply low permeation rates.

For gas applications, the cover may be pin-pricked. Pin-pricking reduces the potential of cover blistering due to permeation. However, pin-pricked wire reinforced hoses are not suitable for subsea use. Parker Polyflex wire reinforced hoses may be used without pin-pricking. In this case, time of permanent use with gas should be limited to 30 days. Hoses with ColorGard will not be pin-pricked. No special precautions on decompression rate are required, however, explosive decompression rate (>200 bar/sec) is not recommended. Note that hoses with coextruded core tube with Fluoropolymer inner liner are not recommended for gas applications.

For fluids, not listed or for advice on particular applications, please contact Parker Hannifin, Polyflex Division in Lampertheim, Germany.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Chemical	Concentration	N				M
		20°C (68°F)	40°C (104°F)	60°C (140°F)	90°C (194°F)	100°C (212°F)
Acetaldehyde		A	B	X	X	A
Acetic Acid	5%	A	A	A	B	E
Acetic Acid	10%	A	A	B	X	E
Acetic Acid	50%	B	X	X	X	E
Acetic Anhydride		B	X	X	X	E
Acetone	Pure	A	A	B	X	A
Acetylene		A	A	A	-	A
Air		A	A	A	A	A
Aluminium Sulfate	Saturated Solution	A	A	A	A	A
Ammonia	Liquid or Gas	A	A	A	X	A
Ammonium Chloride		A	A	A	-	A
Ammonium Hydroxide	Concentrated	A	A	A	A	A
Ammonium Nitrate		A	A	A	A	A
Ammonium Sulfate	Saturated Solution	A	A	B	-	E
Amyl Acetate		A	A	A	B	A
Aniline		B*	X	X	X	E
Asphalt		A	A	A	A	A
Barium Chloride	Saturated Solution	A	A	A	A	A
Benzaldehyde		A	B	X	X	E
Benzene		A	A*	B	X	E
Butane		A	A	A	A	A
Butyl Alcohol		A*	B	X	X	E
Calcium Arsenate		A	A	A	-	A
Calcium Chloride	Saturated Solution	A	A	A	A	A
Calcium Nitrate		A	A	A	-	A
Camphor		A	-	-	-	A
Carbon Dioxide		A	A	A	A	A
Carbon Monoxide		A	A	A	A	A
Carbon Disulfide		A*	B*	B	X	A
Carbon Tetrachloride		X	X	X	X	A
Cement Slurries		A	A	A	-	A
Chlorinated Solvents		B	X	X	X	E
Chloroform		B	X	X	X	E
Chromic Acid		X	X	X	X	E
Citric Acid	Saturated Solution	A	A	B	X	E
Copper Sulfate		A	A	A	A	A
Cyclohexane		A	A	A	B	A
Cyclohexanol		A	B	X	X	E

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

Chemical	Concentration	N				M
		20°C (68°F)	40°C (104°F)	60°C (140°F)	90°C (194°F)	100°C (212°F)
Cyclohexanone		A	B	X	X	E
Diammonium Phosphate		A	A	B	-	E
Dichloroethylene		B	X	X	X	E
Diesel		A	A	A	A	A
Diester Oils		A	A	A	B	A
Diethanolamine	20%	A	A*	A*	B	A
Diethyl Ether		A	-	-	-	E
Dioctylphthalate		A	A	A	B	A
Ethanol	Pure	A*	B	B	X	E
Ethyl Acetate		A	A	A	-	A
Ethylene Glycol		A*	A*	B	X	E
Ethylene Oxide		A	A	X	X	E
Fatty Acid Esters		A	A	A	A	A
Formaldehyde	Technical	A	B	X	X	E
Formic Acid	10%	X	X	X	X	E
Furfuryl Alcohol		A	A*	B	X	E
Gas (Coal)		A	A	-	-	A
Gasoline (High Octane)		A	A	A*	-	A
Glucose		A	A	A	A	A
Glycerine	Pure	A	A	B	X	E
Glycol		A	A	B	X	A
Heptane		A	A	A*	-	A
Hexane		A	A	A	A	A
Hydrogen		A	A	A	A	A
Hydraulik Fluid (petroleum base)		A	A	A	A	A
Hydraulik Fluid (phosphate ester base)		A	A	A	B	A
Hydraulik Fluid (water base)		A	A	A	A	A
Hydrogen Peroxide	20%	A	B	-	-	E
Hydrochloric Acid	15%	A	B	X	X	E
Hydrochloric Acid	28%	X	X	X	X	E
Hydrochloric Acid	37%	X	X	X	X	A
Hydrofluoric Acid	3%	A	B	X	X	E
Isocyanates		B	X	X	X	E
Isooctane		A	A	A	A	A
Isopropyl Alcohol		A	B	X	X	E
Kerosene		A	A	A*	B	A

For detailed ordering information, please consult price list or contact Parflex Division.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Chemical	Concentration	N				M
		20°C (68°F)	40°C (104°F)	60°C (140°F)	90°C (194°F)	100°C (212°F)
Lactic Acid		A	A	A	B	E
LP Gas		A	A	A	A	E
Magnesium Chloride	50%	A	A	A	A	A
Mercury		A	A	A	A	A
Methane		A	A	A	A	E
Methanol	Pure	A	B	B*	X	E
Methyl-Cellosolve		A	A	A	X	A
Methyl Acetate		A	A	A	-	A
Methyl Bromide		A	X	X	X	E
Methyl Chloride		A	X	X	X	E
Methyl Sulfate		A	B	-	-	E
Methyl Ethyl Ketone		A	A	B	X	-
Methyl Isobutyl Ketone		A	A	B	X	E
Methylene Chloride		X	X	X	X	A
Monochlorobenzene		B	X	X	X	A
Naphta		A	A	A	-	A
Naphtalene		A	A	A	B	A
Natural Gas		A	A	A	A	E
Nitric Acid		X	X	X	X	A
Nitrobenzene		B	X	X	X	A
Nitrogen Gas		A	A	A	A	E
Oil Crude		A	A	A	B	A
Oils Refined		A	A	A	B	A
Oleic Acid		A	A	A	B	A
Oxalic Acid		A	A	B	X	E
Oxygen Gas		A	A	B	X	A
Perchloric Acid		B	X	X	X	B
Perchloroethylene		B	X	X	X	E
Petroleum Ether		A	A	A	B	E
Phosphoric Acid	50%	A	B	X	X	E
Picric Acid		B	X	X	X	E
Potassium Carbonate		A	A	B	X	E
Potassium Chloride		A	A	B	X	E
Potassium Hydroxide	50%	A	B	X	X	E
Potassium Nitrate		A*	B*	X	X	E
Potassium Sulfate		A	A	A	A	A
Propane		A	A	A	A	A
Propylen Glycol		A	B	X	X	A

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

Chemical	Concentration	N				M
		20°C (68°F)	40°C (104°F)	60°C (140°F)	90°C (194°F)	100°C (212°F)
Pydraul F9		A	A	A	-	A
Pyridine	Pure	B	X	X	X	E
Sodium Borate		A	A	A	-	A
Sodium Carbonate	Saturated Solution	A	A	B	X	E
Sodium Chloride	Saturated Solution	A	A	A	A	A
Sodium Hydroxide	50%	A	B	X	X	E
Sodium Hypochlorite	Concentrated	B	X	X	X	E
Sodium Hypochlorite	Dilute Commercial	A	B	X	X	E
Sodium Sulfide		A	A	B	-	E
Stearin		A	B	B	-	E
Stearic Acid		A	A	A	B	A
Styrene Monomer		A	A*	-	-	E
Sulphur Dioxide		B	X	X	X	A
Sulphur Hexafluoride Gas		A	A	A	A	A
Sulphuric Acid	10%	A	B	X	X	A
Sulfic Anhydride		B	X	X	X	E
Tartaric Acid		A	A	A	B	A
Tetraethyl Lead		A	-	-	-	E
Tetrahydrofurane		A	A	B	X	E
Toluene		A	A*	B	B	E
Trichloroethane		B	X	X	X	E
Trichloroethylene		B	X	X	X	E
Tricresyl Phosphate		A	A	A	B	A
Tributyl Phosphate		A	A	A	B	A
Trisodium Phosphate		A	A	A	A	A
Triphenyl Phosphate		A	A	B	-	A
Turpentine		A	A	B	-	A
Urea		A	A	B	B	E
Uric Acid		A	A	A	B	A
Vinegar		A	A	A	-	A
Water		A	A	A	A	A
Water Glycols		A	A	A	B	A
Water, Sea		A	A	A	A	A
Water, Soda		A	A	A	A	A
Xylene		A	A*	B	B	E
Zinc Chloride		A	A	B	X	E

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



F-40

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of **polyflex** Offshore Hoses

Appendix 2: Data for Tensile Loading and Weights of Polyflex Hoses

Note that all below values of tensile forces include the own weight of the hoses.

Pressurized hose can take higher tensile load, it will elongate less. All values below have been confirmed by testing. In all cases the hoses will not elongate more than 10%.

2448N-32V80	Pressure [bar]	0	100 and above		
	Max. tensile force [kN]	15	20		
2580N-32V80	Pressure [bar]	0	100	200	300 and above
	Max. tensile force [kN]	25	30	35	40
2240N-48V80	Pressure [bar]	0	100 and above		
	Max. tensile force [kN]	15	20		
2440N-48V80	Pressure [bar]	0	100	200 and above	
	Max. tensile force [kN]	30	40	50	
2640N-48V80	Pressure [bar]	0	100	200	350 and above
	Max. tensile force [kN]	30	40	50	100

In the table below some figures are put together for information.

	Hose ID (mm)	Hose OD (mm)	Hose weight in air empty (kg/m)	Hose weight in air, full of water (kg/m)	Hose weight in water empty (kg/m)	Hose weight in water full of water (kg/m)
2448N-32V80	50.5	80.5	8.5	10.5	3.3	5.3
2580N-32V80	50.5	84.5	9.4	11.5	3.7	5.7
2240N-48V80	75.0	114.0	11.5	16.0	1.1	5.6
2440N-48V80	75.0	122.0	18.7	23.2	6.7	11.3
2640N-48V80	75.0	130.0	27.5	32.0	14.0	18.4


1st Example: No pressure. 300 m length of 2240N-48V80 shall be deployed. Hose weight in water, full of water, 5,6 kg/m × 300 m = 1680 kg. Max tensile force is 15 kN, therefore a 300m length is too heavy to deploy in these conditions.

2nd Example: Pressure 100 bar. 300 m length of 2240N-48V80 shall be deployed. Hose weight in water, full of water, 5,6 kg/m × 300 m = 1680 kg max. tensile force is 20 kN, so a 300 m length of 2240N-48V80 is OK to deploy when pressurized at 100 bar, and an additional weight of 2000-1680=320 kg may be added.

NOTE: Appendix 2 chemical charts are located in the on-line brochure 4900-PFDE-ES28, followed by Appendix 3. Choose the link below for immediate access.

TAKE ME TO 4900-PFDE-ES28

Twin Line and Multi-Line Separation Instructions

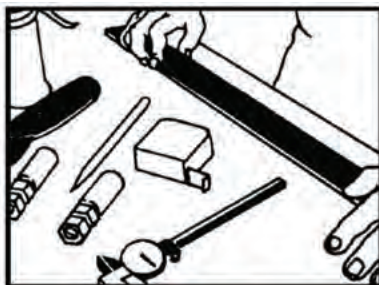

1. Position the twinned or multi-line hose assembly so that it lies flat on work surface without tendency to twist or turn.



4. Press the multi-line hose assembly firmly and flat against the work surface with your free hand so that it does not move. Using a Stanley trimming knife, model No. 10-515, or equivalent, draw the knife toward you with constant light to moderate pressure and a smooth stroke. Three or four strokes will be necessary to separate the hoses.


NOTE: It is important that the knife blade be perpendicular to the hose during this procedure so that the blade cuts only the center line of the web. **EXTREME CARE MUST BE TAKEN TO AVOID CUTTING THROUGH THE COVER OF THE HOSES AND THEREBY EXPOSING THE REINFORCEMENT.** If this occurs, the hose assembly must be discarded.

If the separation length is greater than that which can be accomplished with one continuous, smooth stroke, then the procedure should be repeated over shorter distances, always cutting toward the free end of the hoses.



2. Measure and mark the length that the hoses are to be separated.

Note: If length of separation is specified from the threaded or swivel nut end of coupling, deduct the cutoff allowance dimension for the specific style of coupling used. The cutoff allowance is obtainable from the hose fitting tables in Section B or can be calculated by subtracting the insertion depth of the shell from the overall coupling length.

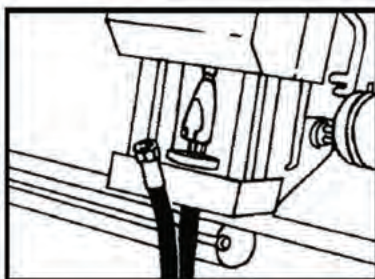

5. It is suggested that the separation length be sufficiently long so that the swaging or crimping operation can be accomplished without risk of kinking the hoses or tearing the web, which could result in exposure of the reinforcement. (See Photo B.)




Do not attempt to pull bonded hoses apart. Hoses must be separated with a blade using the process described above.



3. Lightly lubricate the web area between the hoses. Distribute the lubricant uniformly along the web of the assembly to be separated.

Parker Hoze-Oil or any lightweight oil will suffice. (SAE 10 or 20) The function of the oil is to reduce the friction of the knife blade so that it naturally seeks the center of the valley formed by the hoses. This eliminates the need for the operator to steer the knife.

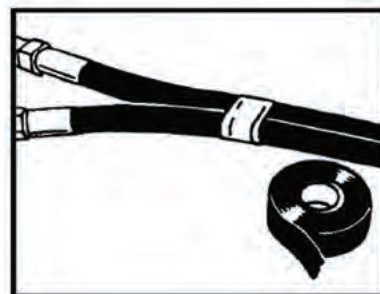

6. At the option of the assembler as dictated by the installation, it is suggested that a nylon lashing strap or tape be applied at the termination of the separated length to provide protection against tearing of the web or hose covers.



The separation length must allow for the swaging or crimping operation without damaging the hose.

Parker Safety Guide

Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, Connectors, Conductors, Valves and Related Accessories



Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, Connectors, Conductors, Valves and Related Accessories
Publication No. 4400-B.1
Revised: September 2015

WARNING: Failure or improper selection or improper use of hose, tubing, fittings, assemblies, valves, connectors, conductors or related accessories ("Products") can cause death, personal injury and property damage. Possible consequences of failure or improper selection or improper use of these Products include but are not limited to:

- Fittings thrown off at high speed.
- High velocity fluid discharge.
- Explosion or burning of the conveyed fluid.
- Electrocutation from high voltage electric powerlines.
- Contact with suddenly moving or falling objects that are controlled by the conveyed fluid.
- Injections by high-pressure fluid discharge.

- Dangerously whipping Hose.
- Tube or pipe burst.
- Weld joint fracture.
- Contact with conveyed fluids that may be hot, cold, toxic or otherwise injurious.
- Sparking or explosion caused by static electricity buildup or other sources of electricity.
- Sparking or explosion while spraying paint or flammable liquids.
- Injuries resulting from inhalation, ingestion or exposure to fluids.

Before selecting or using any of these Products, it is important that you read and follow the instructions below. No product from any division in Fluid Connector Group is approved for in-flight aerospace applications. For hoses and fittings used in in-flight aerospace applications, please contact Parker Aerospace Group

GENERAL INSTRUCTIONS

1.0 Scope: This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) these Products. For convenience, all rubber and/or thermoplastic products commonly called "hose" or "tubing" are called "Hose" in this safety guide. Metallic tube or pipe are called "tube". All assemblies made with Hose are called "Hose Assemblies". All assemblies made with Tube are called "Tube Assemblies". All products commonly called "fittings", "couplings" or "adapters" are called "Fittings". Valves are fluid system components that control the passage of fluid. Related accessories are ancillary devices that enhance or monitor performance including crimping, flaring, flanging, presetting, bending, cutting, deburring, swaging machines, sensors, tags, lockout handles, spring guards and associated tooling. This safety guide is a supplement to and is to be used with the specific Parker publications for the specific Hose, Fittings and Related Accessories that are being considered for use. Parker publications are available at www.parker.com. SAE J1273 (www.sae.org) and ISO 17165-2 (www.ansi.org) also provide recommended practices for hydraulic Hose Assemblies, and should be followed.

1.1 Fail-Safe: Hose, Hose Assemblies, Tube, Tube Assemblies and Fittings can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of the Hose, Hose Assembly, Tube, Tube Assembly or Fitting will not endanger persons or property.

1.2 Distribution: Provide a copy of this safety guide to each person responsible for selecting or using Hose, Tube and Fitting products. Do not select or use Parker Hose, Tube or Fittings without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the Products.

1.3 User Responsibility: Due to the wide variety of operating conditions and applications for Hose, Tube and Fittings, Parker does not represent or warrant that any particular Hose, Tube or Fitting is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the Products.
- Assuring that the user's requirements are met and that the application presents no health or safety hazards.
- Following the safety guide for Related Accessories and being trained to operate Related Accessories.
- Providing all appropriate health and safety warnings on the equipment on which the Products are used.
- Assuring compliance with all applicable government and industry standards.

1.4 Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the Products being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2.0 HOSE, TUBE AND FITTINGS SELECTION INSTRUCTIONS

2.1 Electrical Conductivity: Certain applications require that the Hose be nonconductive to prevent electrical current flow. Other applications require the Hose and the Fittings and the Hose/Fitting interface to be sufficiently conductive to drain off static electricity. Extreme care must be exercised when selecting Hose, Tube and Fittings for these or any other applications in which electrical conductivity or nonconductivity is a factor.

The electrical conductivity or nonconductivity of Hose, Tube and Fittings is dependent upon many factors and may be susceptible to change. These factors include but are not limited to the various materials used to make the Hose and the Fittings, Fitting finish (some Fitting finishes are electrically conductive while others are nonconductive), manufacturing methods (including moisture control), how the Fittings contact the Hose, age and amount of deterioration or damage or other changes, moisture content of the Hose at any particular time, and other factors.

The following are considerations for electrically nonconductive and conductive Hose. For other applications consult the individual catalog pages and the appropriate industry or regulatory standards for proper selection.

2.1.1 Electrically Nonconductive Hose: Certain applications require that the Hose be nonconductive to prevent electrical current flow or to maintain electrical isolation. For applications that require Hose to be electrically nonconductive, including but not limited to applications near high voltage electric lines, only special nonconductive Hose can be used. The manufacturer of the equipment in which the nonconductive Hose is to be used must be consulted to be certain that the Hose, Tube and Fittings that are selected are proper for the application. Do not use any Parker Hose or Fittings for any such application requiring nonconductive Hose, including but not limited to applications near high voltage electric lines or dense magnetic fields, unless (i) the application is expressly approved in the Parker technical publication for the product, (ii) the Hose is marked "nonconductive", and (iii) the manufacturer of the equipment on which the Hose is to be used specifically approves the particular Parker Hose, Tube and Fittings for such use.

2.1.2 Electrically Conductive Hose: Parker manufactures special Hose for certain applications that require electrically conductive Hose. Parker manufactures special Hose for conveying paint in airless paint spraying applications. This Hose is labeled "Electrically Conductive Airless Paint Spray Hose" on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in all airless paint spraying applications. Do not use any other Hose for airless paint spraying, even if electrically conductive. Use of any other Hose or failure to properly connect the Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. All hoses that convey fuels must be grounded.

Parker manufactures a special Hose for certain compressed natural gas ("CNG") applications where static electricity buildup may occur. Parker CNG Hose assemblies comply with the requirements of ANSI/IAS NGV 4.2; CSA 12.52, "Hoses for Natural Gas Vehicles and Dispensing Systems" (www.ansi.org). This Hose is labeled "Electrically Conductive for CNG Use"

Parker Safety Guide

on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in, for example, high velocity CNG dispensing or transfer. Do not use any other Hose for CNG applications where static charge buildup may occur, even if electrically conductive. Use of other Hoses in CNG applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. Care must also be taken to protect against CNG permeation through the Hose wall. See section 2.6, Permeation, for more information. Parker CNG Hose is intended for dispenser and vehicle use within the specified temperature range. Parker CNG Hose should not be used in confined spaces or unventilated areas or areas exceeding the specified temperature range. Final assemblies must be tested for leaks. CNG Hose Assemblies should be tested on a monthly basis for conductivity per ANSI/IAS NGV 4.2; CSA 12.52.

Parker manufactures special Hose for aerospace in-flight applications. Aerospace in-flight applications employing Hose to transmit fuel, lubricating fluids and hydraulic fluids require a special Hose with a conductive inner tube. This Hose for in-flight applications is available only from Parker's Stratoflex Products Division. Do not use any other Parker Hose for in-flight applications, even if electrically conductive. Use of other Hoses for in-flight applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury and property damage. These Hose assemblies for in-flight applications must meet all applicable aerospace industry, aircraft engine and aircraft requirements.

2.2 Pressure: Hose, Tube and Fitting selection must be made so that the published maximum working pressure of the Hose, Tube and Fittings are equal to or greater than the maximum system pressure. The maximum working pressure of a Hose, or Tube Assembly is the lower of the respective published maximum working pressures of the Hose, Tube and the Fittings used. Surge pressures or peak transient pressures in the system must be below the published maximum working pressure for the Hose, Tube and Fitting. Surge pressures and peak pressures can usually only be determined by sensitive electrical instrumentation that measures and indicates pressures at millisecond intervals. Mechanical pressure gauges indicate only average pressures and cannot be used to determine surge pressures or peak transient pressures. Published burst pressure ratings for Hose is for manufacturing test purposes only and is no indication that the Product can be used in applications at the burst pressure or otherwise above the published maximum recommended working pressure.

2.3 Suction: Hoses used for suction applications must be selected to insure that the Hose will withstand the vacuum and pressure of the system. Improperly selected Hose may collapse in suction application.

2.4 Temperature: Be certain that fluid and ambient temperatures, both steady and transient, do not exceed the limitations of the Hose, Tube, Fitting and Seals. Temperatures below and above the recommended limit can degrade Hose, Tube, Fittings and Seals to a point where a failure may occur and release fluid. Tube and Fittings performances are normally degraded at elevated temperature. Material compatibility can also change at temperatures outside of the rated range. Properly insulate and protect the Hose Assembly when routing near hot objects (e.g. manifolds). Do not use any Hose in any application where failure of the Hose could result in the conveyed fluids (or vapors or mist from the conveyed fluids) contacting any open flame, molten metal, or other potential fire ignition source that could cause burning or explosion of the conveyed fluids or vapors.

2.5 Fluid Compatibility: Hose, and Tube Assembly selection must assure compatibility of the Hose tube, cover, reinforcement, Tube, Plating and Seals with the fluid media used. See the fluid compatibility chart in the Parker publication for the product being considered or used. This information is offered only as a guide. Actual service life can only be determined by the end user by testing under all extreme conditions and other analysis.

Hose, and Tube that is chemically compatible with a particular fluid must be assembled using Fittings and adapters containing likewise compatible seals. Flange or flare processes can change Tube material properties that may not be compatible with certain requirements such as NACE

2.6 Permeation: Permeation (that is, seepage through the Hose or Seal) will occur from inside the Hose or Fitting to outside when Hose or Fitting is used with gases, liquid and gas fuels, and refrigerants (including but not limited to such materials as helium, diesel fuel, gasoline, natural gas, or LPG). This permeation may result in high concentrations of vapors which are potentially flammable, explosive, or toxic, and in loss of fluid. Dangerous explosions, fires, and other hazards can result when using the wrong Hose for such applications. The system designer must take into account the fact that this

permeation will take place and must not use Hose or Fitting if this permeation could be hazardous. The system designer must take into account all legal, government, insurance, or any other special regulations which govern the use of fuels and refrigerants. Never use a Hose or Fitting even though the fluid compatibility is acceptable without considering the potential hazardous effects that can result from permeation through the Hose or Tube Assembly.

Permeation of moisture from outside the Hose or Fitting to inside the Hose or Fitting will also occur in Hose or Tube assemblies, regardless of internal pressure. If this moisture permeation would have detrimental effects (particularly, but not limited to refrigeration and air conditioning systems), incorporation of sufficient drying capacity in the system or other appropriate system safeguards should be selected and used. The sudden pressure release of highly pressurized gas could also result in Explosive Decompression failure of permeated Seals and Hoses.

2.7 Size: Transmission of power by means of pressurized fluid varies with pressure and rate of flow. The size of the components must be adequate to keep pressure losses to a minimum and avoid damage due to heat generation or excessive fluid velocity.

2.8 Routing: Attention must be given to optimum routing to minimize inherent problems (kinking or flow restriction due to Hose collapse, twisting of the Hose, proximity to hot objects or heat sources). For additional routing recommendations see SAE J1273 and ISO 17165-2. Hose Assemblies have a finite life and should be installed in a manner that allows for ease of inspection and future replacement. Hose because of its relative short life, should not be used in residential and commercial buildings inside of inaccessible walls or floors, unless specifically allowed in the product literature. Always review all product literature for proper installation and routing instructions.

2.9 Environment: Care must be taken to insure that the Hose, Tube and Fittings are either compatible with or protected from the environment (that is, surrounding conditions) to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, sunlight, heat, ozone, moisture, water, salt water, chemicals and air pollutants can cause degradation and premature failure.

2.10 Mechanical Loads: External forces can significantly reduce Hose, Tube and Fitting life or cause failure. Mechanical loads which must be considered include excessive flexing, twist, kinking, tensile or side loads, bend radius, and vibration. Use of swivel type Fittings or adapters may be required to insure no twist is put into the Hose. Use of proper Hose or Tube clamps may also be required to reduce external mechanical loads. Unusual applications may require special testing prior to Hose selection.

2.11 Physical Damage: Care must be taken to protect Hose from wear, snagging, kinking, bending smaller than minimum bend radius and cutting, any of which can cause premature Hose failure. Any Hose that has been kinked or bent to a radius smaller than the minimum bend radius, and any Hose that has been cut or is cracked or is otherwise damaged should be removed and discarded. Fittings with damages such as scratches on sealing surfaces and deformation should be replaced.

2.12 Proper End Fitting: See instructions 3.2 through 3.5. These recommendations may be substantiated by testing to industry standards such as SAE J517 for hydraulic applications, or MIL-A-5070, AS1339, or AS3517 for Hoses from Parker's Stratoflex Products Division for aerospace applications.

2.13 Length: When determining the proper Hose or Tube length of an assembly take into consideration. The Hose length change due to pressure. The Tube length change due to thermal expansion or contraction, and the Hose or Tube machine tolerances and movements. When routing short hose assemblies, it is recommended that the minimum free hose length is always used. Consult the hose manufacturer for their minimum free hose length recommendations. Hose assemblies should be installed in such a way that any motion or flexing occurs within the same plane.

2.14 Specifications and Standards: When selecting Hose, Tube and Fittings, government, industry, and Parker specifications and recommendations must be reviewed and followed as applicable.

2.15 Hose Cleanliness: Hose and Tube components may vary in cleanliness levels. Care must be taken to ensure that the Hose and Tube Assembly selected has an adequate level of cleanliness for the application.

2.16 Fire Resistant Fluids: Some fire resistant fluids that are to be conveyed by Hose or Tube require use of the same type of Hose or Tube as used with petroleum base fluids. Some such fluids require a special Hose, Tube, Fitting and Seal, while a few fluids will not work with any Hose at all. See instructions 2.5 and 1.5. The wrong Hose, Tube, Fitting or Seal may fail after a very short service. In addition, all liquids but pure water may burn fiercely

Parker Safety Guide

under certain conditions, and even pure water leakage may be hazardous.

2.17 Radiant Heat: Hose and Seals can be heated to destruction without contact by such nearby items as hot manifolds or molten metal. The same heat source may then initiate a fire. This can occur despite the presence of cool air around the Hose or Seal. Performance of Tube and Fitting subjected to the heat could be degraded.

2.18 Welding or Brazing: When using a torch or arc welder in close proximity to hydraulic lines, the hydraulic lines should be removed or shielded with appropriate fire resistant materials. Flame or weld spatter could burn through the Hose or Seal and possibly ignite escaping fluid resulting in a catastrophic failure. Heating of plated parts, including Hose Fittings and adapters, above 450°F (232°C) such as during welding, brazing or soldering may emit deadly gases. Any elastomer seal on fittings shall be removed prior to welding or brazing, any metallic surfaces shall be protected after brazing or welding when necessary. Welding and brazing filler material shall be compatible with the Tube and Fitting that are joined.

2.19 Atomic Radiation: Atomic radiation affects all materials used in Hose and Tube assemblies. Since the long-term effects may be unknown, do not expose Hose or Tube assemblies to atomic radiation. Nuclear applications may require special Tube and Fittings.

2.20 Aerospace Applications: The only Hose, Tube and Fittings that may be used for in-flight aerospace applications are those available from Parker's Stratoflex Products Division. Do not use any other Hose or Fittings for in-flight applications. Do not use any Hose or Fittings from Parker's Stratoflex Products Division with any other Hose or Fittings, unless expressly approved in writing by the engineering manager or chief engineer of Stratoflex Products Division and verified by the user's own testing and inspection to aerospace industry standards.

2.21 Unlocking Couplings: Ball locking couplings or other Fittings with quick disconnect ability can unintentionally disconnect if they are dragged over obstructions, or if the sleeve or other disconnect member, is bumped or moved enough to cause disconnect. Threaded Fittings should be considered where there is a potential for accidental uncoupling.

3.0 HOSE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1 Component Inspection: Prior to assembly, a careful examination of the Hose and Fittings must be performed. All components must be checked for correct style, size, catalog number, and length. The Hose must be examined for cleanliness, obstructions, blisters, cover looseness, kinks, cracks, cuts or any other visible defects. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion or other imperfections. Do NOT use any component that displays any signs of nonconformance.

3.2 Hose and Fitting Assembly: Do not assemble a Parker Fitting on a Parker Hose that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Do not assemble a Parker Fitting on another manufacturer's Hose or a Parker Hose on another manufacturer's Fitting unless (i) the engineering manager or chief engineer of the appropriate Parker division approves the Assembly in writing or that combination is expressly approved in the appropriate Parker literature for the specific Parker product, and (ii) the user verifies the Assembly and the application through analysis and testing. For Parker Hose that does not specify a Parker Fitting, the user is solely responsible for the selection of the proper Fitting and Hose Assembly procedures. See instruction 1.4.

To prevent the possibility of problems such as leakage at the Fitting or system contamination, it is important to completely remove all debris from the cutting operation before installation of the Fittings. The Parker published instructions must be followed for assembling the Fittings on the Hose. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at www.parker.com.

3.3 Related Accessories: Do not crimp or swage any Parker Hose or Fitting with anything but the listed swage or crimp machine and dies in accordance with Parker published instructions. Do not crimp or swage another manufacturer's Fitting with a Parker crimp or swage die unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.4 Parts: Do not use any Parker Fitting part (including but not limited to socket, shell, nipple, or insert) except with the correct Parker mating parts, in accordance with Parker published instructions, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.5 Field Attachable/Permanent: Do not reuse any field attachable Hose Fitting that has blown or pulled off a Hose. Do not reuse a Parker permanent Hose Fitting (crimped or swaged) or any part thereof. Complete Hose Assemblies may only be reused after proper inspection under section 4.0. Do not assemble Fittings to any previously used hydraulic Hose that was in service, for use in a fluid power application.

3.6 Pre-Installation Inspection: Prior to installation, a careful examination of the Hose Assembly must be performed. Inspect the Hose Assembly for any damage or defects. DO NOT use any Hose Assembly that displays any signs of nonconformance.

3.7 Minimum Bend Radius: Installation of a Hose at less than the minimum listed bend radius may significantly reduce the Hose life. Particular attention must be given to preclude sharp bending at the Hose to Fitting juncture. Any bending during installation at less than the minimum bend radius must be avoided. If any Hose is kinked during installation, the Hose must be discarded.

3.8 Twist Angle and Orientation: Hose Assembly installation must be such that relative motion of machine components does not produce twisting.

3.9 Securement: In many applications, it may be necessary to restrain, protect, or guide the Hose to protect it from damage by unnecessary flexing, pressure surges, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

3.10 Proper Connection of Ports: Proper physical installation of the Hose Assembly requires a correctly installed port connection insuring that no twist or torque is transferred to the Hose when the Fittings are being tightened or otherwise during use.

3.11 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, kinking, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.

3.12 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Hose maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.

3.13 Routing: The Hose Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.

3.14 Ground Fault Equipment Protection Devices (GFEPDs): WARNING! Fire and Shock Hazard. To minimize the danger of fire if the heating cable of a Multitube bundle is damaged or improperly installed, use a Ground Fault Equipment Protection Device. Electrical fault currents may be insufficient to trip a conventional circuit breaker.

For ground fault protection, the IEEE 515: (www.ansi.org) standard for heating cables recommends the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres".

4.0 TUBE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

4.1 Component Inspection: Prior to assembly, a careful examination of the Tube and Fittings must be performed. All components must be checked for correct style, size, material, seal, and length. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion, missing seal or other imperfections. Do NOT use any component that displays any signs of nonconformance.

4.2 Tube and Fitting Assembly: Do not assemble a Parker Fitting with a Tube that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. The Tube must meet the requirements specified to the Fitting. The Parker published instructions must be followed for assembling the Fittings to a Tube. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at www.parker.com.

4.3 Related Accessories: Do not preset or flange Parker Fitting components using another manufacturer's equipment or procedures unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Tube, Fitting component and tooling must be checked for correct style, size and material. Operation and maintenance of Related Accessories must be in accordance with the operation manual for the designated Accessory.

4.4 Securement: In many applications, it may be necessary to restrain, protect, or guide the Tube to protect it from damage by unnecessary flexing,

Parker Safety Guide

pressure surges, vibration, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

4.5 Proper Connection of Ports: Proper physical installation of the Tube Assembly requires a correctly installed port connection insuring that no torque is transferred to the Tube when the Fittings are being tightened or otherwise during use.

4.6 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.

4.7 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Tube Assembly maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.

4.8 Routing: The Tube Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.

5.0 HOSE AND FITTING MAINTENANCE AND REPLACEMENT INSTRUCTIONS

5.1 Even with proper selection and installation, Hose life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a possible Hose failure, and experience with any Hose failures in the application or in similar applications should determine the frequency of the inspection and the replacement for the Products so that Products are replaced before any failure occurs. Certain products require maintenance and inspection per industry requirements. Failure to adhere to these requirements may lead to premature failure. A maintenance program must be established and followed by the user and, at minimum, must include instructions 5.2 through 5.7

5.2 Visual Inspection Hose/Fitting: Any of the following conditions require immediate shut down and replacement of the Hose Assembly:

- Fitting slippage on Hose;
- Damaged, cracked, cut or abraded cover (any reinforcement exposed);
- Hard, stiff, heat cracked, or charred Hose;
- Cracked, damaged, or badly corroded Fittings;
- Leaks at Fitting or in Hose;
- Kinked, crushed, flattened or twisted Hose; and
- Blistered, soft, degraded, or loose cover.

5.3 Visual Inspection All Other: The following items must be tightened, repaired, corrected or replaced as required:

- Leaking port conditions;
- Excess dirt buildup;
- Worn clamps, guards or shields; and
- System fluid level, fluid type, and any air entrapment.

5.4 Functional Test: Operate the system at maximum operating pressure and check for possible malfunctions and leaks. Personnel must avoid potential hazardous areas while testing and using the system. See section 2.2.

5.5 Replacement Intervals: Hose assemblies and elastomeric seals used on Hose Fittings and adapters will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Hose Assemblies and elastomeric seals should be inspected and replaced at specific replacement intervals, based on previous service life, government or industry recommendations, or when failures could result in unacceptable downtime, damage, or injury risk. See section 1.2. Hose and Fittings may be subjected to internal mechanical and/or chemical wear from the conveying fluid and may fail without warning. The user must determine the product life under such circumstances by testing. Also see section 2.5.

5.6 Hose Inspection and Failure: Hydraulic power is accomplished by utilizing high pressure fluids to transfer energy and do work. Hoses, Fittings and Hose Assemblies all contribute to this by transmitting fluids at high pressures. Fluids under pressure can be dangerous and potentially lethal and, therefore, extreme caution must be exercised when working with fluids under pressure and handling the Hoses transporting the fluids. From time to time, Hose Assemblies will fail if they are not replaced at proper time intervals.

Usually these failures are the result of some form of misapplication, abuse, wear or failure to perform proper maintenance. When Hoses fail, generally the high pressure fluids inside escape in a stream which may or may not be visible to the user. Under no circumstances should the user attempt to locate the leak by "feeling" with their hands or any other part of their body. High pressure fluids can and will penetrate the skin and cause severe tissue damage and possibly loss of limb. Even seemingly minor hydraulic fluid injection injuries must be treated immediately by a physician with knowledge of the tissue damaging properties of hydraulic fluid.

If a Hose failure occurs, immediately shut down the equipment and leave the area until pressure has been completely released from the Hose Assembly. Simply shutting down the hydraulic pump may or may not eliminate the pressure in the Hose Assembly. Many times check valves, etc., are employed in a system and can cause pressure to remain in a Hose Assembly even when pumps or equipment are not operating. Tiny holes in the Hose, commonly known as pinholes, can eject small, dangerously powerful but hard to see streams of hydraulic fluid. It may take several minutes or even hours for the pressure to be relieved so that the Hose Assembly may be examined safely.

Once the pressure has been reduced to zero, the Hose Assembly may be taken off the equipment and examined. It must always be replaced if a failure has occurred. Never attempt to patch or repair a Hose Assembly that has failed. Consult the nearest Parker distributor or the appropriate Parker division for Hose Assembly replacement information.

Never touch or examine a failed Hose Assembly unless it is obvious that the Hose no longer contains fluid under pressure. The high pressure fluid is extremely dangerous and can cause serious and potentially fatal injury.

5.7 Elastomeric seals: Elastomeric seals will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Elastomeric seals should be inspected and replaced.

5.8 Refrigerant gases: Special care should be taken when working with refrigeration systems. Sudden escape of refrigerant gases can cause blindness if the escaping gases contact the eye and can cause freezing or other severe injuries if it contacts any other portion of the body.

5.9 Compressed natural gas (CNG): Parker CNG Hose Assemblies should be tested after installation and before use, and at least on a monthly basis per instructions provided on the Hose Assembly tag. The recommended procedure is to pressurize the Hose and check for leaks and to visually inspect the Hose for damage and to perform an electrical resistance test.

Caution: Matches, candles, open flame or other sources of ignition shall not be used for Hose inspection. Leak check solutions should be rinsed off after use.

6.0 HOSE STORAGE

6.1 Age Control: Hose and Hose Assemblies must be stored in a manner that facilitates age control and first-in and first-out usage based on manufacturing date of the Hose and Hose Assemblies. Unless otherwise specified by the manufacturer or defined by local laws and regulations:

6.1.1 The shelf life of rubber hose in bulk form or hose made from two or more materials is 28 quarters (7 years) from the date of manufacture, with an extension of 12 quarters (3 years), if stored in accordance with ISO 2230;

6.1.2 The shelf life of thermoplastic and polytetrafluoroethylene hose is considered to be unlimited;

6.1.3 Hose assemblies that pass visual inspection and proof test shall not be stored for longer than 2 years.

6.1.4 Storage: Stored Hose and Hose Assemblies must not be subjected to damage that could reduce their expected service life and must be placed in a cool, dark and dry area with the ends capped. Stored Hose and Hose Assemblies must not be exposed to temperature extremes, ozone, oils, corrosive liquids or fumes, solvents, high humidity, rodents, insects, ultraviolet light, electromagnetic fields or radioactive materials.

Offer of Sale

The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, as subsidiaries and its authorized distributors are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any such item, when communicated to Parker Hannifin Corporation, its subsidiary or an authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.

2. Payment: Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

3. Delivery: Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.

4. Warranty: Seller warrants that the items sold thereunder shall be free from defects in material or workmanship for a period of 365 days from the date of shipment to Buyer, or 2,000 hours of use, whichever expires first. THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GAURANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT

LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED.

NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLELY OR PARTIALLY, TO BUYER'S DESIGNS OR SPECIFICATIONS.

5. Limitation Of Remedy: SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.

6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold herunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.

7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. Buyer's Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for

Offer of Sale

the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity For Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes in the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and options, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and

return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgments resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of the sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.

514

Part Number Index

A Hose	01D9-4-6C.....C-38	1018X-6-04CA-26, A-28, A-36,A-68, B-15	10655-6-4C.....B-7	10K0101-12-4C.....C-27
	01D9-6-6C.....C-38	1018X-6-4.....A-26, A-30	10655-6-6C.....B-7	10K0101-16-12C.....C-27
	01D9-8-6C.....C-38	1019X-8-08.....A-20	10655-6-8C.....B-7	10K0101-16-16C.....C-27
	01D9-8-8C.....C-38	101BL-12-12.....A-38, B-24	10655-6-6C.....A-14	10K0101-16-4C.....C-27
	02D9-8-8C.....C-38	101BL-6-06.....A-38, B-24	10655-6-8C.....A-14	10K0201-12-12C.....C-28
	02Y5-12-12C.....C-32	101BL-8-08.....A-38, B-24	10655-8-08C.....B-7	10K0201-12-16C.....C-28
	02Y5-12-16C.....C-32	101BL-8-08C.....A-38, B-24	10655-8-8C.....A-14	10K0201-12-6C.....C-28
	02Y5-12-4C.....C-32	101BS-8-08.....A-28, B-26	1068X-16-16C-SUBSEAA-26,B-15	10K0201-16-6C.....C-28
	02Y5-12-6C.....C-32	101BS-8-08C.....A-28, B-26	1068X-4-04.....A-26, A-28, B-15	10K0201-16-8C.....C-28
	02Y5-12-9C.....C-32	101EX-2-012.....A-12, B-33	1068X-4-04CA-14, A-26, A-36,A-68, B-15	10K0201-4-12C.....C-28
B Fittings	02Y5-16-12C.....C-32	101EX-4-012.....A-12, B-33	1068X-6-04.....A-26, A-28, B-15	10K0201-6-12C.....C-28
	02Y5-16-16C.....C-32	101HP-2-3.....A-56, B-34	1068X-6-04CA-14, A-26, A-36,A-68, B-15	10K0201-6-16C.....C-28
	02Y5-16-6C.....C-32	101HP-2-4.....A-56, B-34	1069X-10-08.....A-20	10K0202-12-12C.....C-29
	02Y5-16-9C.....C-32	101HP-4-3.....A-56, B-34	106E3-16-16C.....A-30, B-32	10K0202-12-16C.....C-29
	02Y5-1-9C.....C-32	101HP-4-4.....A-56, B-34	106E3-4-4C.....A-30, B-32	10K0202-12-4C.....C-29
	02Y5-2-12C.....C-32	101HP-4-6.....A-56, B-34	106E3-6-4C.....A-30, B-32	10K0202-12-6C.....C-29
	02Y5-2-16C.....C-32	101HP-6-3.....A-56, B-34	106E3-8-8C.....A-30, B-32	10K0202-16-16C.....C-29
	02Y5-2-4C.....C-32	101HP-6-4.....A-56, B-34	106EX-4-012.....A-12, B-33	10K0203-16-16C.....C-38
	02Y5-2-6C.....C-32	101HP-6-4C.....A-56, B-34	106EX-4-02.....A-12, B-33	10K0203-4-6C.....C-38
	02Y5-2-9C.....C-32	101HP-6-6.....A-56, B-34	106HP-4-3.....A-56, B-34	10K0203-4-8C.....C-38
C Adapters & Valves	02Y5-4-12C.....C-32	101KY-2-04.....A-24, A-28	106HP-4-4.....A-56, B-34	10K0203-6-4C.....C-38
	02Y5-4-16C.....C-32	101KY-4-04.....A-24, A-28, B-36	106HP-4-4C.....A-56, B-34	10K0203-6-6C.....C-38
	02Y5-4-4C.....C-32	101KY-4-05.....A-24, B-3	106HP-6-4.....A-56, B-34	10K0203-6-8C.....C-38
	02Y5-4-6C.....C-32	101KY-6-04.....A-28, B-36	106HP-6-6.....A-56, B-34	10K0203-8-4C.....C-38
	02Y5-4-9C.....C-32	101KY-6-05.....A-24	106HP-6-6C.....A-56, B-34	10K0203-8-6C.....C-38
	02Y5-6-12C.....C-32	101LX-4-04.....A-32, B-39	106HP-8-6C.....A-56, B-34	10K0303-4-4C.....C-43
	02Y5-6-16C.....C-32	101LX-4-04C.....B-39	106KY-6-04.....A-28	10K0303-4-6C.....C-43
	02Y5-6-4C.....C-32	101LX-6-04.....A-32, B-39	106LX-12-08C.....A-14, A-36	10K0303-6-8C.....C-43
	02Y5-6-6C.....C-32	101LX-8-08.....A-24, A-26, B-39	106LX-6-04C.....A-36, B-39	10K0306-4-4C.....C-43
	02Y5-6-9C.....C-32	101LX-8-08C.....A-36, B-39	106LX-6-05C.....A-68, B-39	10K0306-4-6C.....C-43
D Quick Couplings	02Y5-8-12C.....C-32	101NX-12-12.....B-48	106LX-8-06C-M-SUBSEAA-68,B-39	10K0306-4-8C.....C-43
	02Y5-8-16C.....C-32	101NX-20-20.....A-26	106LX-8-06C-M-SUBSEAA-68,B-39	10K0306-6-6C.....C-43
	02Y5-8-4C.....C-32	101NX-4-04.....B-48	106LX-8-08.....A-24, A-26, B-39	10K0606-4-4C.....C-43
	02Y5-8-6C.....C-32	101NX-6-06.....B-48	106LX-8-08C....A-14, A-36, B-39	10K0606-6-6C.....C-43
	02Y5-8-9C.....C-32	101NX-8-08.....A-22, B-48	106LX-8-08C-M-SUBSEAA-68,B-39	10K06-10C-CAP.....C-45
	02Y6-12-6C.....C-37	101TX-1-025.....A-16	106NX-12-12.....B-49	10K06-12C-CAP.....C-45
	02Y6-12-9C.....C-37	101TX-1-025W.....B-54	106NX-16-12.....B-49	10K06-4C-CAP.....C-45
	02Y6-16-9C.....C-37	101TX-1-03.....A-16, B-54	106NX-16-16.....B-49	10K06-6C-CAP.....C-45
	02Y6-1-6C.....C-37	101TX-2-025.....A-16, B-54	106NX-20-20.....A-26, B-49	10KL02-12C.....C-39
	02Y6-2-4C.....C-37	101TX-2-02W.....A-16, B-54	106NX-4-04.....B-49	10KL02-16C.....C-39
E Accessories	02Y6-2-6C.....C-37	101TX-2-03.....A-16, B-54	106NX-6-04.....B-49	10KP01-12C.....C-41
	02Y6-2-9C.....C-37	101TX-4-025W.....A-16, B-54	106NX-6-06.....B-49	10KP01-16C.....C-41
	02Y6-4-4C.....C-37	101TX-4-03.....A-16, B-54	106NX-8-06.....B-49	10KP03-10C.....C-45
	02Y6-4-6C.....C-37	101TX-4-03W.....A-16	106NX-8-08.....A-20, A-22, B-49	10KP03-16C.....C-45
	02Y6-4-9C.....C-37	101TX-4-05W.....A-16	106TX-4-025W.....A-16, B-55	10KP03-4C.....C-45
	02Y6-6-4C.....C-37	1028X-4-04C.....A-68	106TX-4-02W.....A-16, B-55	10KP03-6C.....C-45
	02Y6-6-6C.....C-37	102TX-1-025.....A-16, B-54	106TX-6-03W.....A-16, B-55	10KP03-8C.....C-45
	02Y6-6-9C.....C-37	1063X-6-06C.....A-14, B-11	106UX-6-06C.....A-68	10KT02-12C.....C-40
	02Y6-8-4C.....C-37	1063X-8-06C.....A-14, B-11	10K0101-12-12C.....C-27	10KT02-16C.....C-40
	02Y6-8-6C.....C-37	10655-4-4C.....A-14, B-7		
F General Technical	02Y6-8-9C.....C-37			
	1018X-4-04.....A-26, A-28, B-15			
	1018X-4-04CA-36, A-68, B-15			
	1018X-6-04.....B-15			

Part Number Index

10KX02-12C.....C-40	15KT02-6C.....C-40	1AYCX-16-16W.....A-42, B-28	1HN5X-48-48.....A-62, B-61
10KX02-16C.....C-40	15KT02-8C.....C-40	1AYKY-6-04.....A-24, A-28, B-36	1HNLX-32-16C4462...A-36, B-44
137E3-16-16C-411...A-30, B-32	15KX02-4C.....C-40	1AYKY-8-05.....A-24, B-36	1HNLX-48-48.....A-62, B-61
137E3-4-4C.....A-30, B-32	15KX02-6C.....C-40	1AYLX-11-08...A-18, A-24, A-26, B-41	1HNS6-32-32.....A-64, B-62
137E3-6-4C.....A-30, B-32	15KX02-8C.....C-40	1AYLX-11-08C.....A-36, B-41	1HNS6-32-32-SC.....A-64, B-62
137E3-8-8C-411.....A-30, B-32	15Y8X-6-04C.....A-28, B-16	1AYLX-6-02.....A-32, B-41	1HNTX-48-48.....A-62, B-62
1378X-16-16C-SUBSEA...A-26, B-15	16ALX-16-16C4462.....A-36	1AYLX-6-04.....A-32, B-41	1HYLX-4-02.....A-32, B-45
139E3-16-16C-411...A-30, B-31	16Y2X-4-025.....A-40, A-44, B-9	1AYLX-6-04C.....B-41	1HYLX-4-02-LH.....A-32, B-45
139E3-4-4C.....A-30, B-31	16Y2X-4-03.....A-40, A-44, B-9	1AYLX-8-05C.....A-68, B-41	1MB8X-6-4.....A-26, A-28, B-18
139E3-6-4C.....A-30, B-31	1922X-4-03.....A-40, A-44	1AYTX-6-025W.....A-16, B-55	1TM2X-8-03-HPK.....B-64
139E3-8-8C-411.....A-30, B-31	1922X-4-03-SA.....B-10	1AYTX-6-02W.....A-16, B-55	1TM2X-8-05-HPK.....B-64
1398X-16-16C-SUBSEA...A-26, B-15	1923X-8-06C.....A-14, B-11	1AYTX-6-03W.....A-16, B-55	1TMBL-9-08-HPK.....B-64
15K0101-1-1C.....C-27	19255-4-4C.....A-14, B-7	1AYUX-6-04C.....A-68, B-56	1TMBS-9-08-HPK.....B-64
15K0101-12-6C.....C-27	19255-6-6C.....A-14, B-7	1AYUX-8-06C.....A-68, B-56	1TMKY-8-05-HPK.....B-64
15K0101-16-6C.....C-27	19255-8-8C.....A-14, B-7	1C38X-4-4.....A-26, B-17	1Y25X-12-08C-M-SUBSEA...A-68, B-13
15K0101-2-1C.....C-27	1928X-4-04.....A-26, A-28, B-16	1C38X-8-04.....A-26, A-28, B-17	1Y25X-9-08C-M-SUBSEA...A-68, B-13
15K0101-2-2C.....C-27	192LX-8-08C.....A-14, B-40	1C93X-14-06C.....A-14, B-11	1Y28X-6-04C.....A-36, B-18
15K0101-2-4C.....C-27	19G8X-16-16C-SUBSEA...A-26, B-15	1C93X-16-06C.....A-14, B-11	1Y28X-9-04C.....A-36, B-18
15K0101-4-4C.....C-27	19G8X-24-16C-SUBSEA...A-26, B-15	1C955-10-4C.....A-14, B-8	1Y2LX-12-08C.....A-36, B-46
15K0101-6-6C.....C-27	19GE3-16-16C.....A-30, B-31	1C955-12-4C.....A-14, B-8	1Y2LX-12-08C-M-SUBSEA.....
15K0101-6-8C.....C-27	19GE3-16-8C.....A-30, B-31	1C955-12-6C.....A-14, B-8A-68, B-46
15K0101-8-8C.....C-27	19GE3-24-16C.....A-30, B-31	1C955-16-8C.....A-14, B-8	1Y2LX-16-16C4462....A-36, B-46
15K0201-1-4C.....C-28	19GE3-8-8C.....A-30, B-31	1C955-8-4C.....A-14, B-8	1Y2LX-6-04.....A-32, B-46
15K0201-1-8C.....C-28	19ME3-16-16C.....A-30, B-30	1C98X-10-04C.....A-14, B-17	1Y2LX-9-08C.....A-36, B-46
15K0201-2-1C.....C-28	19ME3-16-8C.....A-30, B-30	1C98X-8-04C.....A-14, B-17	1Y2UX-6-04C.....A-68, B-56
15K0201-2-8C.....C-28	19ME3-24-16C.....A-30, B-30	1C9BL-14-06.....A-38, B-25	1Y2UX-9-06C.....A-68, B-56
15K0201-4-1C.....C-28	19M8X-16-16C-SUBSEA...A-26, B-16	1C9BL-14-08.....A-38, B-25	1Y42X-4-025....A-40, A-44, B-10
15K0201-4-8C.....C-28	19M8X-24-16C-SUBSEA...A-26, B-16	1C9BL-16-06.....A-38, B-25	1Y42X-6-025....A-40, A-44, B-10
15K0201-6-2C.....C-28	19ME3-8-8C.....A-30, B-30	1C9BL-16-08.....A-38, B-25	1Y42X-4-03.....A-40, A-44, A-48,
15K0201-6-6C.....C-28	19WE3-16-16C.....A-30, B-30	1C9BL-25-08.....A-38B-10
15K0201-6-8C.....C-28	19WE3-16-8C.....A-30, B-30	1C9BL-25-12.....A-38, B-25	1Y42X-6-03.....A-40, A-44, A-48,
15K0201-8-8C.....C-28	19WE3-24-16C.....A-30, B-30	1C9BS-16-08.....A-28, B-27B-10
15K0202-2-2C.....C-29	19WE3-8-8C.....A-30, B-30	1C9CX-30-16W.....A-42, B-28	1Y42X-6-05.....A-40, A-44, A-46,
15K0202-4-1C.....C-29	19W8X-16-16C-SUBSEA...A-26, B-16	1C9EX-6-012.....A-12, B-33A-48, A-50, A-52,
15K0202-4-4C.....C-29	19W8X-24-16C-SUBSEA...A-26, B-16	1C9EX-8-012.....A-12, B-33B-10
15K0202-6-2C.....C-29	1AY2X-10-05-SA.....A-40, A-44,	1C9EX-8-02.....A-12, B-33	1Y42X-9-03.....A-40, A-44, A-48,
15K0202-6-6C.....C-29A-46, A-48, A-50,	1C9LX-16-08.....A-18B-10
15K0202-8-1C.....C-29A-52, B-9,	1C9LX-16-08C.....A-14, A-36,	1Y42X-9-05.....A-40, A-44, A-46,
15K0202-8-2C.....C-29	1AY2X-13-05.....A-40B-43A-48, A-50, A-52,
15K0202-8-6C.....C-29	1AY2X-6-025.....A-40, A-44	1D98X-4-4.....A-26, A-28,B-10
15K0202-8-8C.....C-29	1AY2X-6-025-SA.....B-9A-30, B-18	1Y4KY-9-05.....A-24, B-37
15K02-12C-CAP.....C-41	1AY2X-6-03.....A-40, A-44, B-9	1HE5X-32-24COSK.....A-58, A-66	1Y4LX-4-02.....A-32, B-46
15K02-2C-CAP.....C-41	1AY2X-6-03-SA.....A-48, B-9	1HE5X-32-24COSK-FLAT.....A-58,	1Y4LX-9-08C.....A-36, B-46
15K02-4C-CAP.....C-41	1AY2X-8-05-SA.....A-40, A-44,B-59	1YHLX-4-02.....A-32, B-47
15K02-6C-CAP.....C-41A-46, A-48,	1HE5X-32-24COSK-SEG.....A-58	1YHLX-4-02-LH.....A-32, B-47
15K02-8C-CAP.....C-41A-50, A-52, B-9,	1HE5X-48-48.....A-62, B-59	1YHTX-9-06SC.....A-34, B-47
15KL02-12C-45.....C-39	1AY5X-11-08C-M-SUBSEA.....	1HE5X-48-48-FLAT....A-62, B-59	1YHTX-4-025.....A-16, B-55
15KL02-4C.....C-39A-68, B-12	1HECX-32-32-FLAT....A-60, B-59	1YHTX-6-03.....A-16, B-55
15KL02-4C-45.....C-39	1AY8X-6-04.....A-26, A-28, B-17	1HELX-48-48.....A-62, B-60	1YHTX-6-03W.....A-16
15KL02-6C.....C-39	1AY8X-6-04C.....A-14, A-26, A-36,	1HELX-48-48-FLAT....A-62, B-60	1YHTX-6-03W-LH.....A-16
15KL02-6C-45.....C-39A-68, B-17	1HES6-32-32-FLAT....A-64, B-60	1YHTX-6-05W.....A-16
15KL02-8C.....C-39	1AYBL-11-06.....A-38, B-24	1HES6-32-32-FLAT-SC.A-64, B-60	1YHTX-6-05W-LH.....A-16
15KL02-8C-45.....C-39	1AYBL-11-08.....A-38, B-24	1HETX-48-48.....A-62, B-60	201RX-2-2C.....A-12, B-52
15KP01-1C.....C-41	1AYBL-11-08C.....A-38, B-24	1HETX-48-48-FLAT....A-62, B-60	2020N-012R30.....A-11, A-12
15KP01-2C.....C-41	1AYBL-8-06.....A-38	1HN5X-32-24COSK.....A-58, A-66	2020N-02V30.....A-11, A-12
15KT02-4C.....C-40	1AYBS-11-08.....A-28, B-26		
	1AYBS-11-08C.....A-28, B-26		

For detailed ordering information, please consult price list or contact Parflex Division.



Part Number Index

2022N-04V91-10K .. A-13, A-14, F-28	2380N-04V06..... A-25	2440M-06V38 A-67, A-68, F-27	2640N-12V32..... A-41
2022N-04V91-10K-13MM F-28	2380N-04V06W..... A-23	2440M-08V38 A-67, A-68, F-27	2640N-12V71..... A-42
2022N-04V91-5K A-13, A-14, F-28	2380N-04V0x A-26	2440M-12V38 F-27	2640N-12V91 A-41, A-42, F-25
2022N-06V91-10K A-13, A-14, F-28	2380N-04V0xW A-24	2440M-16V38-5K..... F-27	2640N-24V80 A-57, A-58, F-26
2022N-06V91-5K A-13, A-14, F-28	2380N-04V36..... A-25, A-26	2440N-04V91 A-35, A-36, F-25	2640N-24V80-15K A-57, A-58
2022N-08V91-10K A-13, A-14, F-28	2380N-04V91 A-25, A-26, F-25	2440N-04V32..... A-33, A-35	2640N-24V80-KOP F-26
2022N-08V91-5K A-13, A-14, F-28	2380N-05V00W..... A-23	2440N-04V32..... A-33	2640N-24V80-KOP2..... F-26
206RX-4-2C A-12, B-52	2380N-05V06W..... A-23	2440N-06V91 A-35, A-36, F-25	2640N-48V80 A-61, A-62, F-26, F-41
216-200-18..... A-18, A-28, A-30, A-34, A-36, A-48, A-52, E-2	2380N-05V0xW A-24	2440N-08V32..... A-33	2648N-32V80..... A-59, A-60
220-200-22..... A-30, A-34, A-36, A-42, E-2	2380N-06V91 F-25	2440N-08V3x A-34	2740D-025V30..... A-43
2240D-025V33-TC A-15, A-16	2380N-08V00..... A-25, A-26	2440N-08V91 A-35, A-36, F-25	2740D-025V35..... A-43
2240D-025V34..... A-15, A-16	2380N-08V10W..... A-23	2440N-12V36..... A-33	2740D-025V3x A-44
2240D-02V32..... A-15, A-16	2380N-08V16W..... A-23	2440N-12V37..... A-33	2740D-03V30..... A-43
2240D-02V33-TC A-15, A-16	2380N-08V1xW A-24	2440N-12V3x A-34	2740D-03V35..... A-43
2240D-03V32..... A-15, A-16	2380N-08V91 F-25	2440N-12V91 A-35, A-36, F-25	2740D-03V3x A-44
2240D-03V34..... A-15, A-16	2380N-16V12..... A-25	2440N-16...10K..... A-36	2740D-05V32..... A-43
2240D-03V36-TC A-15, A-16	2380N-16V16..... A-25	2440N-16V30..... A-33	2740D-05V37..... A-43
2240D-03V3x A-16	2380N-16V1x A-26	2440N-16V36..... A-33	2740D-05V3x A-44
2240D-04V32..... A-15, A-16	2380N-20V30..... A-25, A-26	2440N-16V3x A-34	2741D-05V34/10..... A-45, A-46
2240D-04V33..... A-15	2388N-04V04..... A-27, A-28	2440N-16V91 A-35, A-36, F-25	2749D-05V35..... A-43
2240D-04V3x A-16	2388N-04V12W..... A-27	2440N-16V91-10K A-35, F-25	2840D-03V34..... A-47, A-48
2240D-05V32..... A-15, A-16	2388N-04V13W..... A-27	2440N-48V80 A-61, A-62, F-26, F-41	2840D-05V32..... A-47
2240D-05V36-TC A-15, A-16	2388N-04V1xW A-28	2448D-025V32-TC A-31	2840D-05V35..... A-47
2240M-04V38 F-27	2388N-08V13W..... A-27	2448D-025V35-TC A-31	2840D-05V3x A-48
2240N-04V91 F-25	2388N-08V14W..... A-27	2448D-025V3x-TC..... A-32	2840D-08V30..... A-47
2240N-32V10..... A-63, A-64	2388N-08V1xW A-28	2448M-04V38 A-67, A-68, F-27	2840D-08V37..... A-47
2240N-48V80 A-61, A-62, F-26, F-41	2390M-12V38 F-27	2448M-05V38 A-67, A-68, F-27	2840D-08V3x A-48
2244N-025V00..... A-17, A-18	2390M-16V38 F-27	2448M-06V38 A-67, A-68, F-27	2841D-05V34/15..... A-49, A-50
2244N-08V16W..... A-17, A-18	2390N-04V00..... A-29	2448M-32V88 A-65, A-66, F-27	2849D-05V34..... A-51, A-52
2244N-08V71 A-17, A-18	2390N-04V12..... A-29	2448N-04V91 A-35, A-36, F-25	2TURX-4-2C A-12, B-53
2248D-025V32-TC A-15, A-16	2390N-04V16..... A-29	2448N-32V10..... A-64	412-400 A-36, A-44, A-48
2248D-03V32-TC A-15, A-16	2390N-04Vxx A-30	2448N-32V80..... A-59, A-60, F-26, F-41	416-400-16..... A-42, A-44, A-48, A-52
2248N-32V10..... A-63	2390N-06V91 A-29, A-30, F-25	2580M-32V80 F-27	508-J-500-10 ... A-26, A-30, A-36, A-40, A-44, E-2
2340M-04V38 F-27	2390N-08V12..... A-29	2580M-32V88 A-65, A-66	510-A-500-12 ... A-24, A-26, A-28, A-40, A-44, E-2
2340N-04V91 F-25	2390N-08V13..... A-29	2580N-06V12..... A-37, A-38	512-400-14..... E-2
2370M-06V38 F-27	2390N-08V16..... A-29	2580N-08V10-MSHA ... A-37, A-38	520-A-500-26 A-34, A-36, E-2
2370N-06V91 F-25	2390N-08V1x A-30	2580N-08V12..... A-37, A-38	57CR-16-BLU A-53, A-54, F-28
2370N-06V91-10K F-25	2390N-08V91 F-25	2580N-08V12..... A-37, A-38	57CR-16-YEL..... A-53, A-54
2370N-08V30..... A-19, A-20	2390N-12V03..... A-29, A-30	2580N-12V13..... A-37	57CR-8-BLU A-53, A-54, F-28
2380F-08V07 A-21, A-22	2390N-12V91 F-25	2580N-12V1x A-38	57CR-8-YEL..... A-53, A-54
2380M-04V38 F-27	2390N-16V12..... A-29	2580N-32V80 A-59, A-60, F-26, F-41	5Y01-12-12C..... C-31
2380M-05V38 F-27	2390N-16V13..... A-29	2640D-025V32..... A-39	5Y01-12-16C..... C-31
2380N-04V00..... A-25	2390N-16V16..... A-29	2640D-025V35..... A-39	5Y01-12-2C..... C-31
2380N-04V02..... A-25	2390N-16V1x A-30	2640D-025V3x A-40	5Y01-12-2C..... C-31
2380N-04V03W..... A-23	2390N-16V91 F-25	2640D-03V32..... A-39	5Y01-12-4C..... C-31
2380N-04V04..... A-25	2440D-025V37..... A-31, A-32	2640D-03V37..... A-39	5Y01-12-6C..... C-31
	2440D-02V32-TC A-31	2640D-03V3x A-40	5Y01-12-8C..... C-31
	2440D-02V37-TC A-31	2640D-05V37-TC A-39, A-40	5Y01-16-12C..... C-31
	2440D-02V3x-TC..... A-32	2640M-08V38 A-67, A-68, F-27	5Y01-16-16C..... C-31
	2440D-03V32-TC A-31, A-32	2640M-24V88 A-65, A-66, F-27	5Y01-16-2C..... C-31
	2440D-04V32-TC A-31, A-32	2640N-08V32..... A-41, A-42	5Y01-16-4C..... C-31
	2440D-05V32-TC A-31, A-32	2640N-12V32..... A-42	
	2440M-04V38 A-67, A-68, F-27		
	2440M-05V38 A-67, A-68, F-27		

Part Number Index

5Y01-16-6C.....C-31	5Y5Y-16-16C.....C-15	5YY6-16-9C.....C-13	6068X-4-2AC.....A-18, B-15
5Y01-16-8C.....C-31	5Y5Y-4-12C.....C-15	5YY6-4-4C.....C-13	6068X-8-8C.....A-18, B-14
5Y01-4-12C.....C-31	5Y5Y-4-16C.....C-15	5YY6-4-6C.....C-13	6069X-16-16C.....A-30, B-19
5Y01-4-16C.....C-31	5Y5Y-4-4C.....C-15	5YY6-4-9C.....C-13	6069X-4-4C.....A-30, B-19
5Y01-4-2C.....C-31	5Y5Y-4-6C.....C-15	5YY6-6-4C.....C-13	6069X-6-4C.....A-30, B-19
5Y01-4-4C.....C-31	5Y5Y-4-9C.....C-15	5YY6-6-6C.....C-13	6069X-6-6C-SUBSEA...A-30, B-19
5Y01-4-6C.....C-31	5Y5Y-6-12C.....C-15	5YY6-6-9C.....C-13	6069X-8-6C.....A-30, B-19
5Y01-4-8C.....C-31	5Y5Y-6-16C.....C-15	5YY6-9-4C.....C-13	6069X-8-8C.....A-30, B-19
5Y01-6-12C.....C-31	5Y5Y-6-6C.....C-15	5YY6-9-6C.....C-13	606AX-4-2A.....A-16, B-22
5Y01-6-16C.....C-31	5Y5Y-6-9C.....C-15	5YY6-9-9C.....C-13	606AX-4-3C.....B-22
5Y01-6-2C.....C-31	5Y5Y-9-12C.....C-15	6015X-32-24-TC.....A-58, B-58	606CR-16-16C.....A-54, B-28
5Y01-6-4C.....C-31	5Y5Y-9-16C.....C-15	6015X-32-32-TC.....A-60, A-66, B-58	606CR-8-8C.....A-54, B-28
5Y01-6-6C.....C-31	5Y5Y-9-9C.....C-15	6018X-2-2A.....A-18, B-14	606LX-16-12C.....A-30, A-34, A-36, B-39
5Y01-6-8C.....C-31	5Y6C-CAP.....C-19	6018X-2-2AC.....A-18, B-14	606LX-16-16C...A-34, A-36, B-39
5Y01-9-12C.....C-31	5Y6Y-12-4C.....C-16	6018X-4-2AC.....A-18, B-14	606LX-6-5C.....B-39
5Y01-9-16C.....C-31	5Y6Y-12-6C.....C-16	6018X-6-4.....A-26	606LX-8-5C.....B-39
5Y01-9-2C.....C-31	5Y6Y-12-9C.....C-16	6018X-6-4.....B-14	606LX-8-8C.....A-18, A-36, B-39
5Y01-9-4C.....C-31	5Y6Y-16-4C.....C-16	6018X-8-8C.....A-18, B-14	606NX-4-4C.....A-16, A-26, B-49
5Y01-9-6C.....C-31	5Y6Y-16-6C.....C-16	6019X-16-16C.....A-30, B-19	606NX-6-4C.....A-16, A-26, B-49
5Y01-9-8C.....C-31	5Y6Y-16-9C.....C-16	6019X-4-4C.....A-30, B-19	620-100-18.....E-2
5Y02-12-12C.....C-34	5Y6Y-4-4C.....C-16	6019X-6-6.....A-30, B-19	65Y8X-6-4.....A-26, B-16
5Y02-12-16C.....C-34	5Y6Y-4-6C.....C-16	6019X-6-6C.....A-30, B-19	65YLX-6-3.....A-32, B-40
5Y02-12-2C.....C-34	5Y6Y-4-9C.....C-16	6019X-8-6.....A-30, B-19	65YLX-6-3C.....A-32, B-40
5Y02-12-4C.....C-34	5Y6Y-6-4C.....C-16	6019X-8-6C.....A-30, B-19	65YLX-6-4C.....A-36, B-40
5Y02-12-6C.....C-34	5Y6Y-6-6C.....C-16	6019X-8-8.....A-30, B-19	66YLX-4-3.....A-32, B-41
5Y02-12-8C.....C-34	5Y6Y-6-9C.....C-16	6019X-8-8C.....A-30, B-19	66YLX-4-3C.....A-32, B-41
5Y02-16-12C.....C-34	5Y6Y-9-4C.....C-16	601AX-1-2A.....A-16, B-21	692LX-4-3C.....A-32, B-40
5Y02-16-16C.....C-34	5Y6Y-9-6C.....C-16	601AX-2-2A.....A-16, B-21	692LX-6-5C.....A-32, B-40
5Y02-16-2C.....C-34	5Y6Y-9-9C.....C-16	601AX-2-3.....A-16, B-21	6AY5X-11-8C.....A-42, B-12
5Y02-16-4C.....C-34	5Y9C-CAP.....C-19	601AX-4-5.....A-16, B-21	6AY5X-11-8C-SUBSEA.....A-36, B-12
5Y02-16-6C.....C-34	5YY5-12-16C.....C-11	601AX-6-5.....A-16, B-21	6AY5X-16-12C.....A-42, B-12
5Y02-16-8C.....C-34	5YY5-12-4C.....C-11	601EX-2-2C.....A-12, B-33	6AY5X-16-12C-SD.....A-42, B-12
5Y02-4-12C.....C-34	5YY5-12-6C.....C-11	601LX-12-12C.....A-30, A-34, A-36, B-38	6AY8X-11-8C.....A-18, B-17
5Y02-4-16C.....C-34	5YY5-12-9C.....C-11	601LX-16-12C.....A-30, A-34, A-36, B-38	6AY8X-6-2AC.....A-18, B-16
5Y02-4-2C.....C-34	5YY5-16-12C.....C-11	601LX-16-16C...A-34, A-36, B-38	6AY8X-6-4.....A-26, B-16
5Y02-4-4C.....C-34	5YY5-16-4C.....C-11	601LX-2-2AC.....A-32, B-38	6AY8X-8-5C.....B-16
5Y02-4-6C.....C-34	5YY5-16-6C.....C-11	601LX-4-3.....A-32, B-38	6AY9X-11-8C.....A-30, B-20
5Y02-4-8C.....C-34	5YY5-16-9C.....C-11	601LX-4-4C.....A-36, B-38	6AY9X-16-16C.....A-30, B-20
5Y02-6-12C.....C-34	5YY5-4-12C.....C-11	601LX-4-5.....A-32, B-38	6AY9X-6-4C.....A-30, B-20
5Y02-6-16C.....C-34	5YY5-4-16C.....C-11	601LX-4-5C.....A-32, B-38	6AY9X-8-6C.....A-30, B-20
5Y02-6-2C.....C-34	5YY5-4-6C.....C-11	601LX-6-5.....A-32, B-38	6AYAX-6-2A.....A-16, B-22
5Y02-6-4C.....C-34	5YY5-4-9C.....C-11	601LX-6-5C.....A-32, B-38	6AYAX-6-3.....A-16, B-22
5Y02-6-6C.....C-34	5YY5-6-12C.....C-11	601LX-8-8.....A-34, B-38	6AYLX-11-8C.....A-18, A-34, A-36, B-42
5Y02-6-8C.....C-34	5YY5-6-4C.....C-11	601LX-8-8C.....A-18, A-34, A-36, B-38	6AYLX-11-8C-SD.....A-18, A-36, B-42
5Y02-9-12C.....C-34	5YY5-6-6C.....C-11	601NX-2-4.....A-16, B-48	6AYLX-16-12C.....A-30, A-34, A-36, B-42
5Y02-9-16C.....C-34	5YY5-6-9C.....C-11	601NX-4-4.....A-16, A-26, B-48	6AYLX-16-12C-SD.....A-36, B-42
5Y02-9-2C.....C-34	5YY5-9-12C.....C-11	601NX-4-4C.....A-16, A-26, B-48	6AYLX-16-16C...A-34, A-36, B-42
5Y02-9-4C.....C-34	5YY5-9-16C.....C-11	601PL-1-2.....A-16, B-51	6AYLX-16-16C-SD.....A-36, B-42
5Y02-9-6C.....C-34	5YY5-9-4C.....C-11	602AX-1-2A.....A-16, B-21	6AYLX-16-16-HCL.....A-36, B-42
5Y02-9-8C.....C-34	5YY5-9-6C.....C-11	602AX-2-3.....A-16, B-21	6AYLX-6-2AC.....A-32, B-42
5Y12C-CAP.....C-19	5YY6-12-4C.....C-13	602NX-4-4.....A-16, B-49	
5Y16C-CAP.....C-19	5YY6-12-6C.....C-13		
5Y4C-CAP.....C-19	5YY6-12-9C.....C-13		
5Y5Y-12-12C.....C-15	5YY6-16-4C.....C-13		
5Y5Y-12-16C.....C-15	5YY6-16-6C.....C-13		

For detailed ordering information, please consult price list or contact Parflex Division.

Part Number Index

6AYLX-6-3.....	A-32, B-42	6Y01-4-6C.....	C-36	6Y6Y-4-9C.....	C-22	AV6Y-6C-30.....	C-49
6AYLX-6-3C.....	A-32, B-42	6Y01-4-8C.....	C-36	6Y6Y-6-6C.....	C-22	AV6Y-6C-6.....	C-49
6AYLX-6-4C.....	A-36, B-42	6Y01-6-12C.....	C-36	6Y6Y-6-9C.....	C-22	AV6Y-9C-30.....	C-49
6AYLX-6-4C-SD.....	A-36, B-42	6Y01-6-16C.....	C-36	6Y6Y-9-9C.....	C-22	AV6Y-9C-60.....	C-49
6AYLX-8-5C.....	A-32, B-42	6Y01-6-1C.....	C-36	6Y9C-CAP.....	C-25	AY11C-CAP.....	C-9
6AYLX-8-5C-M-SUBSEA.....	A-68, B-42	6Y01-6-2C.....	C-36	6YHLX-4-2AC-PL.....	A-32, B-47	AY16C-CAP.....	C-9
6AYLX-8-6C.....	A-36, B-42	6Y01-6-4C.....	C-36	6YHLX-4-2AC-PL-LH ..	A-32, B-47	AY6C-CAP.....	C-9
6AYLX-8-6C-M-SUBSEA.....	B-42	6Y01-6-6C.....	C-36	6YHLX-4-3C-PL.....	A-32, B-47	AY8C-CAP.....	C-9
6AYLX-8-6C-SUBSEA.....	A-68	6Y01-6-8C.....	C-36	6YHLX-4-3C-PL-LH....	A-32, B-47	C09-125-1680.....	D-17
6AYNX-6-4C.....	A-26, B-50	6Y01-9-12C.....	C-36	6YHLX-6-3C-PL.....	A-32, B-47	C10-115-1202.....	D-12
6AYWX-10-5C-55.....	A-52, B-57	6Y01-9-16C.....	C-36	6YHLX-6-3C-PL-LH....	A-32, B-47	C10-115-1222.....	D-12
6C95X-16-8C.....	A-42, B-13	6Y01-9-2C.....	C-36	6YHLX-9-5C-PL.....	A-32, B-47	C10-115-1401.....	D-12
6C95X-25-12C.....	A-42, B-13	6Y01-9-4C.....	C-36	6YHLX-9-5C-PL-LH....	A-32, B-47	C10-115-1402.....	D-12
6C9LX-16-8C.....	A-18, A-34, A-36, B-42	6Y01-9-6C.....	C-36	6YMWX-6-5C-55.....	A-52, B-57	C10-115-1404.....	D-12
6C9LX-25-12C.....	A-30, A-34, A-36, B-42	6Y01-9-8C.....	C-36	6YY5-4-12C.....	C-12	C10-115-1422.....	D-12
6C9LX-30-16C.....	A-34, A-36, B-42	6Y02-4-12C.....	C-35	6YY5-4-16C.....	C-12	C10-115-1452.....	D-12
6D9NX-8-8-PL.....	B-50	6Y02-4-16C.....	C-35	6YY5-4-4C.....	C-12	C10-115-1454.....	D-12
6EZAX-5-2A.....	A-16, B-23	6Y02-4-2C.....	C-35	6YY5-4-6C.....	C-12	C10-115-6202.....	D-13
6HB5X-32-32C-TC-10K.....	A-60, A-66, B-58	6Y02-4-4C.....	C-35	6YY5-4-9C.....	C-12	C10-115-6204.....	D-13
6HB5X-32-32C-TC-FLG-10K.....	A-60, A-66, B-58	6Y02-4-6C.....	C-35	6YY5-6-12C.....	C-12	C10-115-6401.....	D-13
6HB5X-32-32-TC.....	A-60, A-66, B-58	6Y02-4-8C.....	C-35	6YY5-6-16C.....	C-12	C10-115-6402.....	D-13
6HB5X-32-32-TC-FLG.....	A-60, A-66, B-58	6Y02-6-12C.....	C-35	6YY5-6-4C.....	C-12	C10-115-6404.....	D-13
6HB5X-41-32-TC.....	A-60, A-66, B-58	6Y02-6-16C.....	C-35	6YY5-6-6C.....	C-12	C10-115-6452.....	D-13
6HB5X-41-32-TC-FLG.....	A-60, A-66, B-58	6Y02-6-2C.....	C-35	6YY5-6-9C.....	C-12	C10-115-6454.....	D-13
6HE5X-32-24-FLATTC.....	A-58, B-59	6Y02-6-4C.....	C-35	6YY5-9-12C.....	C-12	C10-116-1202.....	D-14
6HE5X-32-24-SEGTC.....	A-58	6Y02-6-6C.....	C-35	6YY5-9-16C.....	C-12	C10-116-1222.....	D-14
6HE5X-32-32-FLATTC.....	A-60, A-66, B-59	6Y02-6-8C.....	C-35	6YY5-9-4C.....	C-12	C10-116-1402.....	D-14
6HE5X-32-32-SEGTC.....	A-60, A-66, B-59	6Y02-9-12C.....	C-35	6YY5-9-6C.....	C-12	C10-116-1422.....	D-14
6HELX-16-16-HCL.....	A-36, B-43	6Y02-9-16C.....	C-35	6YY5-9-9C.....	C-12	C10-116-5202.....	D-15
6HN5X-32-24-TC.....	A-58, B-61	6Y02-9-2C.....	C-35	6YY6-4-6C.....	C-21	C10-116-6202.....	D-15
6HN5X-32-32-TC.....	A-60, A-66, B-61	6Y02-9-4C.....	C-35	6YY6-4-9C.....	C-21	C10-125-1202.....	D-16
6HNLX-16-16-HCL.....	A-36, B-43	6Y02-9-6C.....	C-35	6YY6-6-4C.....	C-21	C10-125-5202.....	D-16
6HYLX-4-2AC-PL.....	A-32, B-44	6Y02-9-8C.....	C-35	6YY6-6-9C.....	C-21	C10-125-6202.....	D-16
6HYLX-4-2AC-PL-LH ..	A-32, B-44	6Y25X-12-8C.....	A-42, B-13	6YY6-9-4C.....	C-21	C19-950-0029.....	D-17
6HYLX-4-3C-PL.....	A-32, B-44	6Y25X-16-12C.....	A-42, B-13	6YY6-9-6C.....	C-21	C19-950-0062.....	D-17
6HYLX-4-3C-PL-LH....	A-32, B-44	6Y25X-9-8C.....	A-42, B-13	6YY6-9-9C.....	C-21	C19-950-0064.....	D-17
6HYLX-6-3C-PL.....	A-32, B-44	6Y2HX-9-5C-THD.....	A-32, B-35	6ZEAX-5-2A.....	A-16, B-22	C19-950-1600.....	D-17
6HYLX-6-3C-PL-LH....	A-32, B-44	6Y2HX-9-5C-LONG.....	A-32, B-35	80C-F08W.....	E-3	C19-950-1601.....	D-17
6HYLX-9-5C-PL.....	B-44	6Y2LX-12-5C.....	A-32, B-45	80C-G03.....	E-3	C19-950-1602.....	D-17
6HYLX-9-5C-PL-LH....	A-32, B-44	6Y2LX-12-8C.....	A-34, A-36, B-45	80C-G04.....	E-3	C19-950-1622.....	D-17
6HYPL-1-2.....	A-16, B-51	6Y2LX-16-12C... A-34, A-36, B-45		80C-G06.....	E-3	C19-950-1623.....	D-17
6Y01-4-12C.....	C-36	6Y2LX-16-12C... A-34, A-36, B-45		80C-HP3.....	E-3	C19-950-1680.....	D-17
6Y01-4-16C.....	C-36	6Y2LX-9-5C.....	A-32, B-45	80C-HP4.....	E-3	CV5Y-4C-20.....	C-48
6Y01-4-2C.....	C-36	6Y2LX-9-6C.....	A-36, B-45	80C-HP6.....	E-3	CV5Y-6C-20.....	C-48
6Y01-4-4C.....	C-36	6Y2LX-9-8C.....	A-34, A-36, B-45	83C-9X04.....	E-3	CV5Y-9C-20.....	C-48
		6Y4C-CAP.....	C-25	83C-9X08.....	E-3	CV6Y-4C-60.....	C-50
		6Y4HX-9-5C-XLT.....	A-44, B-35	83C-9X16.....	E-3	CV6Y-6C-60.....	C-50
		6Y4LX-4-2AC.....	A-32, B-46	83C-F16W.....	E-3	CV6Y-9C-60.....	C-50
		6Y4LX-6-2AC.....	A-32, B-46	AV5Y-12C-20.....	C-47	E206JCC3.....	A-30, B-29
		6Y4LX-6-3C.....	A-32, B-46	AV5Y-16C-20.....	C-47	E206JEC3.....	A-30, B-29
		6Y4LX-9-3C.....	A-32, B-46	AV5Y-4C-20.....	C-47	E213JFC4.....	A-30, B-29
		6Y4WX-16-8C.....	A-48, B-57	AV5Y-6C-20.....	C-47	E220JHC1.....	A-30, B-29
		6Y4WX-9-5C-55.....	A-52, B-57	AV5Y-9C-20.....	C-47	E225JIC3.....	A-30, B-29
		6Y6C-CAP.....	C-25	AV6Y-4C-30.....	C-49	G214-245.....	E-3
		6Y6Y-4-4C.....	C-22	AV6Y-4C-60.....	C-49		
		6Y6Y-4-6C.....	C-22				

Part Number Index

G214-250.....E-3	HP010-2-A12.....D-10	MCGHS10-15....A-16, A-24, A-26,A-36, A-40, A-44,A-48, E-3	T5Y-12C.....C-17
HAHM4BM4.....D-17	HP010-2-A16.....D-10A-36, A-40, A-44,A-48, E-3	T5Y-16C.....C-17
HBPHM4-B.....C-24	HP010-2-NFD.....D-10	MCGHS15-20.....A-36, A-44,A-48, A-52, E-3	T5Y-4C.....C-17
HBPHM6-B.....C-24	HP010-2-NMD.....D-10	MCGHS20-30....A-30, A-34, A-36,A-42, E-3	T5Y-6C.....C-17
HBPHM9-B.....C-24	HP-3.....A-55, A-56	MCGHS30-40....A-30, A-34, A-36,A-42, E-3	T5Y-9C.....C-17
HBPLM12-B.....C-19	HP-4.....A-55, A-56	MCGHS3295-SS....A-58, A-60,A-66, E-3	T6Y-4C.....C-23
HBPLM16-B.....C-19	HP-6.....A-55, A-56	MCGHS40-50.....E-3	T6Y-6C.....C-23
HBPLM4-B.....C-19	HP8-3.....A-55, A-56	MCGHS50-60.....E-3	TFTF-8-8.....B-64
HBPLM6-B.....C-19	HP8-4.....A-55, A-56	MHBS012.....A-44, A-48, E-4	TFTF-8-9.....B-64
HBPLM9-B.....C-19	HP8-6.....A-55, A-56	MHBS016.....A-44, A-48,A-52, E-4	TFTF-9-9.....B-64
HDT4500-48A....A-58, A-60, A-66	HPG3-12K.....A-56	MHDC010.....A-26, A-30, A-36,A-40, A-44, E-2	TMCAP-8.....B-64
HP006-0-A12.....D-5	HPG3-12K-ORG.....A-56	MHDC012.....A-24, A-26, A-28,A-40, A-44, E-2	TMCAP-9.....B-64
HP006-0-A9.....D-5	HPG3-23K.....A-56	MHDC016.....A-30, A-48,A-52, E-2	TV15Y-12C-20.....C-48
HP006-0-HM4.....D-5	HPG3-23K-ORG.....A-56	MHDC018.....A-18, A-28, A-34,A-36, A-42, E-2	TV15Y-16C-20.....C-48
HP006-0-HM9.....D-5	HPG4-12K.....A-56	MHDC024.....A-30, A-42, E-2	TV15Y-4C-20.....C-48
HP006-0-LM6.....D-5	HPG4-12K-ORG.....A-56	MHDC026.....A-34, A-36, E-2	TV15Y-6C-20.....C-48
HP006-0-NFB.....D-5	HPG4-23K.....A-56	MK022-03-038.....E-3	TV15Y-9C-20.....C-48
HP006-0-NFC.....D-5	HPG4-23K-ORG.....A-56	MK022-03-039.....E-3	TV16Y-4C-30.....C-50
HP006-0-NMB.....D-5	HPG6-12K.....A-56	MK022-03-041.....E-3	TV16Y-4C-60.....C-50
HP006-0-NMC.....D-5	HPG6-12K-ORG.....A-56	MK022-03-042.....E-3	TV16Y-6C-30.....C-50
HP006-0-NMD.....D-5	HPG6-23K.....A-56	MK022-03-043.....E-3	TV16Y-6C-60.....C-50
HP006-0-X13.....D-5	HPG6-23K-ORG.....A-56	MK022-03-045.....E-3	TV16Y-9C-30.....C-50
HP006-1-A12.....D-6	HPK-HS-8.....B-64	MSG060.....E-2	TV16Y-9C-60.....C-50
HP006-1-A9.....D-6	HPK-HSP-8.....B-64	MSG2006.....E-2	TV25Y-12C-20.....C-47
HP006-1-HM4.....D-6	KCGL40-316-ACL40.....C-25	MSG2106.....A-26, E-2	TV25Y-16C-20.....C-47
HP006-1-LM6.....D-6	KCGL60-316-ACL60.....C-25	MSG4113.....A-18, A-34, E-2	TV25Y-4C-20.....C-47
HP006-1-LM9.....D-6	KCHL90-316-ACL90.....C-25	MSG4120.....A-34, A-36, E-2	TV25Y-6C-20.....C-47
HP006-1-NMB.....D-6	L5Y-12C.....C-17	MSG4125.....A-34, A-36, E-2	TV25Y-9C-20.....C-47
HP006-1-NMC.....D-6	L5Y-16C.....C-17	MTM04T.....E-4	TV26Y-4C-30.....C-49
HP006-1-NMD.....D-6	L5Y-4C.....C-17	PVC-BLUE-012.....E-2	TV26Y-4C-60.....C-49
HP006-1-X13.....D-6	L5Y-6C.....C-17	PVC-BLUE-016.....E-2	TV26Y-6C-30.....C-49
HP006-2-A12.....D-7	L5Y-9C.....C-17	PVC-BLUE-018.....E-2	TV26Y-6C-60.....C-49
HP006-2-A9.....D-7	L6Y-4C.....C-23	PVC-BLUE-024.....E-2	TV26Y-9C-30.....C-49
HP006-2-HM4.....D-7	L6Y-6C.....C-23	PVC-ORANGE-012.....E-2	TV26Y-9C-60.....C-49
HP006-2-LM6.....D-7	L6Y-9C.....C-23	PVC-ORANGE-016.....E-2	X5Y-12C.....C-17
HP006-2-NFB.....D-7	M55STIF4.....A-44, A-48	SV5Y-12C-20.....C-47	X5Y-16C.....C-17
HP006-2-NFC.....D-7	M55STIF-4.....E-4	SV5Y-16C-20.....C-47	X5Y-4C.....C-17
HP006-2-NMB.....D-7	M55STIF-5.....E-4	SV5Y-4C-20.....C-47	X5Y-6C.....C-17
HP006-2-NMC.....D-7	M55STIF6.....A-44, A-48	SV5Y-6C-20.....C-47	X5Y-9C.....C-17
HP006-2-NMD.....D-7	M55STIF-6.....E-4	SV5Y-9C-20.....C-47	X6Y-4C.....C-23
HP006-2-X13.....D-7	MBR003.....A-12, E-2	SV6Y-4C-30.....C-49	X6Y-6-9C.....C-21
HP010-0-A12.....D-8	MBR004.....A-12, E-2	SV6Y-4C-60.....C-49	X6Y-6C.....C-23
HP010-0-A16.....D-8	MBR008.....A-16, A-18, E-2	SV6Y-6C-30.....C-49	X6Y-9C.....C-23
HP010-0-LM12.....D-8	MBR010.....A-26, E-2	SV6Y-6C60.....C-49	Y204-0275C.....C-19, C-25
HP010-0-NFD.....D-8	MBR012.....A-24, E-2	SV6Y-9C-30.....C-49	Y204-0300C.....C-19, C-25
HP010-0-NMD.....D-8	MBR013-B.....A-48	SV6Y-9C-60.....C-49	Y204-0400C.....C-19, C-25
HP010-0-X23.....D-8	MCG001SS.....A-16, A-24, A-26,A-30, A-36, A-40,A-44, E-3	Y204-0600C.....C-19, C-25	Y204-0800C.....C-19, C-25
HP010-1-A12.....D-9	MCG002SS..A-30, A-34, A-36, E-3	Y204-1000C.....C-19, C-25	Y204-1200C.....C-19, C-25
HP010-1-A16.....D-9	MCG003SS..A-30, A-34, A-36, E-3	Y206-0300C.....C-19, C-25	Y206-0400C.....C-19, C-25
HP010-1-LM12.....D-9	MCG005SS.....A-18, A-30	Y206-0600C.....C-19, C-25	
HP010-1-LM9.....D-9			
HP010-1-NMD.....D-9			
HP010-1-X23.....D-9			

For detailed ordering information, please consult price list or contact Parflex Division.



Part Number Index

Y206-0800C.....	C-19, C-25	Y501-9-6C.....	C-33	Y601-9-4C.....	C-37	YA03-16-8C.....	C-44
Y206-1000C.....	C-19, C-25	Y501-9-8C.....	C-33	Y601-9-6C.....	C-37	YA11C-PLUG.....	C-9
Y206-1200C.....	C-19, C-25	Y503-12-12C.....	C-44	Y601-9-8C.....	C-37	YA16C-PLUG.....	C-9
Y209-0400C.....	C-19, C-25	Y503-12-6C.....	C-44	Y603-4-4C.....	C-44	YA6C-PLUG.....	C-9
Y209-0600C.....	C-19, C-25	Y503-12-8C.....	C-44	Y603-4-6C.....	C-44	YA8C-PLUG.....	C-9
Y209-0800C.....	C-19, C-25	Y503-16-12C.....	C-44	Y603-4-8C.....	C-44	YAD9-6-4C.....	C-8
Y209-1000C.....	C-19, C-25	Y503-16-16C.....	C-44	Y603-6-4C.....	C-44	YAD9-6-6C.....	C-8
Y209-1200C.....	C-19, C-25	Y503-4-8C.....	C-44	Y603-6-6C.....	C-44	YAD9-6-8C.....	C-8
Y212-0400C.....	C-19	Y503-9-10C.....	C-44	Y603-6-8C.....	C-44	YAY1-11-16C.....	C-9
Y212-0600C.....	C-19	Y503-9-12C.....	C-44	Y603-9-6C.....	C-44	YAY1-16-16C.....	C-9
Y212-0800C.....	C-19	Y503-9-16C.....	C-44	Y603-9-8C.....	C-44	YAY1-8-16C.....	C-9
Y212-1000C.....	C-19	Y5D9-4-4C.....	C-14	Y6D9-4-6C.....	C-22	YAY2-11-16C.....	C-9
Y212-1200C.....	C-19	Y5D9-6-4C.....	C-14	Y6D9-6-6C.....	C-22	YAY2-16-16C.....	C-9
Y216-0600C.....	C-19	Y5D9-6-6C.....	C-14	Y6TF-6-8.....	B-64	YAY2-8-16C.....	C-9
Y216-0800C.....	C-19	Y5D9-9-6C.....	C-14	Y6TF-9-8.....	B-64	YAY5-11-12C.....	C-8
Y216-1000C.....	C-19	Y5Y5-12-12C.....	C-12	Y6Y6-4-4C.....	C-21	YAY5-11-4C.....	C-8
Y216-1200C.....	C-19	Y5Y5-12-16C.....	C-12	Y6Y6-4-6C.....	C-21	YAY5-11-6C.....	C-8
Y2C-12C.....	C-18	Y5Y5-12-6C.....	C-14	Y6Y6-4-9C.....	C-21	YAY5-11-9C.....	C-8
Y2C-16C.....	C-18	Y5Y5-16-16C.....	C-12	Y6Y6-6-6C.....	C-21	YAY5-16-12C.....	C-8
Y2C-4C.....	C-18	Y5Y5-4-12C.....	C-12	Y6Y6-6-9C.....	C-21	YAY5-16-9C.....	C-8
Y2C-6C.....	C-18	Y5Y5-4-16C.....	C-12	Y6Y6-9-9C.....	C-21	YAY5-6-12C.....	C-8
Y2C-9C.....	C-18	Y5Y5-4-4C.....	C-12	YA01-11-12C.....	C-30	YAY5-6-4C.....	C-8
Y2N-12C.....	C-18	Y5Y5-4-6C.....	C-12	YA01-11-16C.....	C-30	YAY5-6-6C.....	C-8
Y2N-16C.....	C-18	Y5Y5-4-9C.....	C-12	YA01-11-6C.....	C-30	YAY5-6-9C.....	C-8
Y2N-4C.....	C-18	Y5Y5-6-12C.....	C-12	YA01-11-8C.....	C-30	YAY5-8-12C.....	C-8
Y2N-6C.....	C-18	Y5Y5-6-16C.....	C-12	YA01-16-12C.....	C-30	YAY5-8-4C.....	C-8
Y2N-9C.....	C-18	Y5Y5-6-6C.....	C-12	YA01-16-16C.....	C-30	YAY5-8-6C.....	C-8
Y4C-4C.....	C-24	Y5Y5-6-9C.....	C-12	YA01-16-20C.....	C-30	YAY5-8-9C.....	C-8
Y4C-6C.....	C-24	Y5Y5-9-12C.....	C-12	YA01-16-24C.....	C-30	YAY6-10-6C.....	C-7
Y4C-9C.....	C-24	Y5Y5-9-16C.....	C-12	YA01-16-32C.....	C-30	YAY6-10-9C.....	C-7
Y4N-4C.....	C-24	Y5Y5-9-9C.....	C-12	YA01-16-8C.....	C-30	YAY6-11-9C.....	C-7
Y4N-6C.....	C-24	Y5Y6-12-4C.....	C-14	YA01-6-12C.....	C-30	YAY6-6-4C.....	C-7
Y4N-9C.....	C-24	Y5Y6-12-9C.....	C-14	YA01-6-16C.....	C-30	YAY6-6-6C.....	C-7
Y501-12-12C.....	C-33	Y5Y6-16-4C.....	C-14	YA01-6-2C.....	C-30	YAY6-6-9C.....	C-7
Y501-12-16C.....	C-33	Y5Y6-16-6C.....	C-14	YA01-6-4C.....	C-30	YAY6-6-6C.....	C-7
Y501-12-2C.....	C-33	Y5Y6-16-9C.....	C-14	YA01-6-6C.....	C-30	YAY6-8-9C.....	C-7
Y501-12-4C.....	C-33	Y5Y6-4-4C.....	C-14	YA01-6-8C.....	C-30	YAYA-10-10C.....	C-7
Y501-12-6C.....	C-33	Y5Y6-4-6C.....	C-14	YA01-8-12C.....	C-30	YAYA-10-6C.....	C-7
Y501-12-8C.....	C-33	Y5Y6-4-9C.....	C-14	YA01-8-16C.....	C-30	YAYA-11-10C.....	C-7
Y501-16-12C.....	C-33	Y5Y6-6-4C.....	C-14	YA01-8-4C.....	C-30	YAYA-11-11C.....	C-7
Y501-16-16C.....	C-33	Y5Y6-6-9C.....	C-14	YA01-8-6C.....	C-30	YAYA-11-8C.....	C-7
Y501-16-2C.....	C-33	Y5Y6-9-4C.....	C-14	YA01-8-8C.....	C-30	YAYA-16-11C.....	C-7
Y501-16-4C.....	C-33	Y5Y6-9-6C.....	C-14	YA02-11-12C.....	C-29	YAYA-16-16C.....	C-7
Y501-16-6C.....	C-33	Y5Y6-9-9C.....	C-14	YA02-11-8C.....	C-29	YAYA-6-6C.....	C-7
Y501-16-8C.....	C-33	Y601-4-12C.....	C-37	YA02-16-16C.....	C-29	YAYA-8-6C.....	C-7
Y501-4-4C.....	C-33	Y601-4-2C.....	C-37	YA02-6-16C.....	C-29	YAYA-8-8C.....	C-7
Y501-4-8C.....	C-33	Y601-4-4C.....	C-37	YA02-6-4C.....	C-29	YTTF-10-8.....	B-64
Y501-6-4C.....	C-33	Y601-4-6C.....	C-37	YA02-6-8C.....	C-29	YTTF-10-9.....	B-64
Y501-6-6C.....	C-33	Y601-4-8C.....	C-37	YA02-8-12C.....	C-29	YTTF-12-8.....	B-64
Y501-6-8C.....	C-33	Y601-6-4C.....	C-37	YA02-8-4C.....	C-29	YTTF-12-9.....	B-64
Y501-9-12C.....	C-33	Y601-6-6C.....	C-37	YA02-8-6C.....	C-29	YTTF-6-8.....	B-64
Y501-9-16C.....	C-33	Y601-6-8C.....	C-37	YA02-8-8C.....	C-29	YTTF-9-8.....	B-64
Y501-9-2C.....	C-33	Y601-9-12C.....	C-37	YA03-11-6C.....	C-44	YTTF-9-9.....	B-64
Y501-9-4C.....	C-33	Y601-9-16C.....	C-37	YA03-16-12C.....	C-44		



Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 C-Parker (1 800 272 7537)



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes



Climate Control

Key Markets

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & driers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical Instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening

ENGINEERING YOUR SUCCESS.

Parker Fluid Connectors Group

North American Divisions & Distribution Service Centers

Your complete source for quality tube fittings, hose & hose fittings, brass & composite fittings, quick-disconnect couplings, valves and assembly tools, locally available from a worldwide network of authorized distributors.

Fittings:

Available in inch and metric sizes covering SAE, BSP, DIN, GAZ, JIS and ISO thread configurations, manufactured from steel, stainless steel, brass, aluminum, nylon and thermoplastic.

Hose, Tubing and Bundles:

Available in a wide variety of sizes and materials including rubber, wire-reinforced, thermoplastic, hybrid and custom compounds.

Worldwide Availability:

Parker operates Fluid Connectors manufacturing locations and sales offices throughout North America, South America, Europe and Asia-Pacific.

For information, call toll free...

**1-800-C-PARKER
(1-800-272-7537)**

North American Divisions

Fluid System Connectors Division

Otsego, MI
phone 269 694 9411
fax 269 694 4614

Hose Products Division

Wickliffe, OH
phone 440 943 5700
fax 440 943 3129

Industrial Hose Division

Wickliffe, OH
phone 440 883 2120
fax 440 833 2230

Parflex Division

Ravenna, OH
phone 330 296 2871
fax 330 296 8433

Quick Coupling Division

Minneapolis, MN
phone 763 544 7781
fax 763 544 3418

Tube Fittings Division

Columbus, OH
phone 614 279 7070
fax 614 279 7685

Distribution Service Centers

Buena Park, CA

phone 714 522 8840
fax 714 994 1183

Conyers, GA

phone 770 929 0330
fax 770 929 0230

Louisville, KY

phone 502 937 1322
fax 502 937 4180

Portland, OR

phone 503 283 1020
fax 503 283 2201

Toledo, OH

phone 419 878 7000
fax 419 878 7001
fax 419 878 7420
(FCG Kit Operations)

Canada

Grimsby, ONT

phone 905 945 2274
fax 905 945 3945
(Contact Grimsby for other Service Center locations.)

Mexico

Toluca, MEX

phone (52) 722 2754 200
fax (52) 722 2722 168

